

C6T

Full-Room Coverage, Motion-Tracking Master

A Full HD 1080p Wi-Fi pan-tilt camera provides full-room coverage.

Key Features



1080p



Pan and Tilt. Up to 340° horizontal and 90° vertical.



Supports smart motion tracking and recording



Supports MicroSD card slot, up to 128GB



Smart lens shutter for privacy protection




Two-way audio



True Day/Night camera with auto-switching. Infrared night vision up to 10 meters.







PZVIZ








Smart tracking

Upon detection of movement, the C6T automatically captures and tracks the motion while delivering alerts and video recordings in real time.

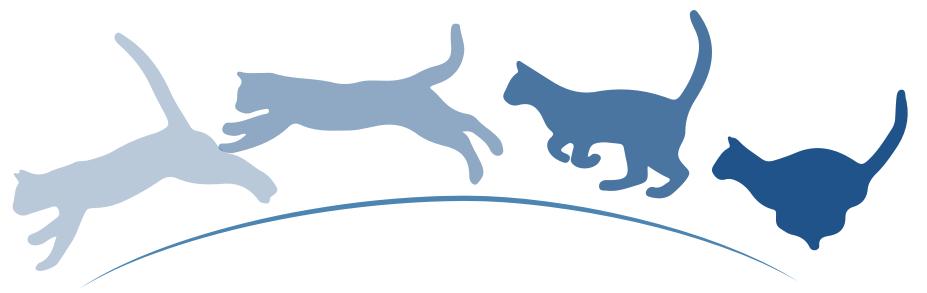

Privacy shutter


The thoughtfully-designed privacy shutter allows you to turn the lens off whenever you need privacy.



Night vision

The C6T is equipped with two powerful infrared lights for night vision up to 10 meters (depending on environment).



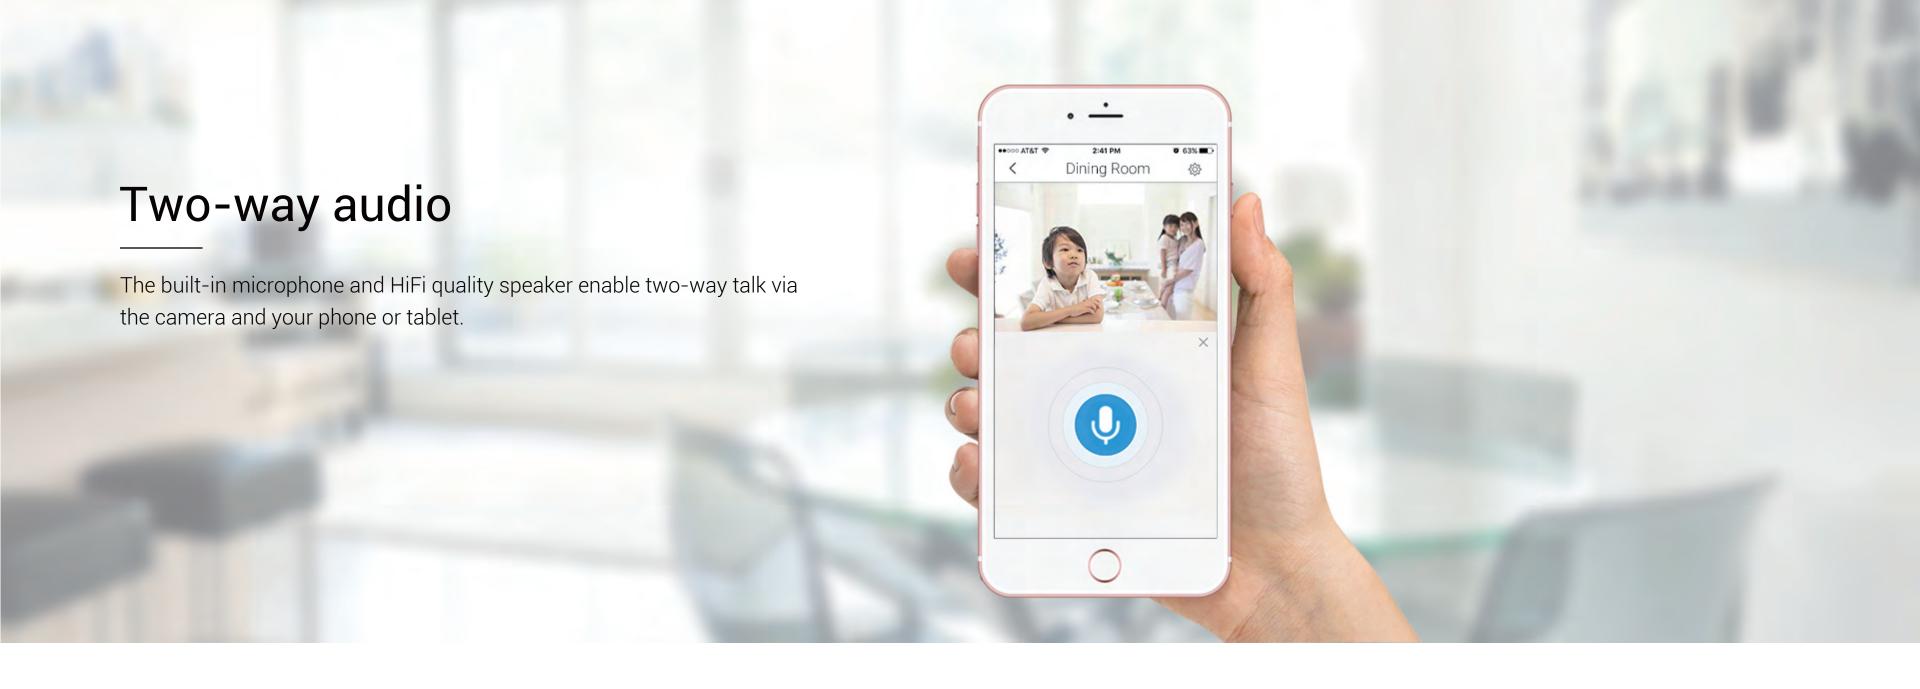

Integrates with EZVIZ alarm system

The C6T can be integrated into the EZVIZ alarm systems.

Once an alarm is triggered, the camera will capture a picture and video footage and send them to the device owner.



Specifications Model CS-CV248-A0-32WFR

Camera

Image Sensor 2 megapixel 1/3" Progressive Scan CMOS

Shutter Self-adaptive shutter

Lens 4mm@ F2.2, Diagonal angle: 95°

PT Angle Pan: 340°, Tilt: 90°

Lens Mount M12

Day & Night IR-cut filter

DNR 3D DNR

WDR Digital WDR

Compression

Video Compression H.264

H.264 Type Main Profile

Video Bit Rate HD, Balanced and Smooth. Adaptive bit rate.

Image

Max. Resolution 1920×1080

Image Settings Brightness, contrast, saturation, etc.

(configurable via EZVIZ Studio)

BLC Support

Network

Storage Supports MicroSD card (max. 128GB)

Smart Alarm Motion detection

Wi-Fi Pairing SmartConfig (Wi-Fi One-Key Configuration)/AP paring

Protocol EZVIZ Cloud proprietary protocol

Interface Protocol EZVIZ Cloud proprietary protocol

General Features Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror

Image, Password Protection, Watermark

Minimum Network

Requirements

Wireless Specifications (for Wi-Fi-supported devices)

2M

Standard IEEE802.11b, 802.11q, 802.11n

Frequency Range 2.4 GHz ~ 2.4835 GHz

Channel Bandwidth Supports 20MHz

Security 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK,

WPS

Transmission Rate 11b: 11Mbps, 11g: 54Mbps, 11n: 135Mbps

General

Power Supply DC 5V±10%
Power Consumption 8W Max

IR Range MAX. 10 meters

Product Dimensions 100mm x 100mm x 90mm
Packaging Dimensions 126mm x 126mm x 155mm

Weight 220g

Package Contents:

- C6T X 1
- Base X 1
- 3 Meters Power Cable X 1
- Drill Template X 1
- Screw Kit X 1
- Power Adapter X 1
- Quick Start Guide X 1

Certificates

FCC/UL/IC/NOM/CE/RoHS/WEEE/REACH

Requirements

- Operating Conditions: -10°C ~ 55°C, Humidity 95% or less (non-condensing)