

7 Port USB 3.0 Dedicated Charging Hub - 5 x 1A, 2 x 2A

ST7CU35122



*actual product may vary from photos

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Product Diagram	1
Introduction	2
Packaging Contents	2
System Requirements.....	2
Installation	3
Specifications.....	5
Technical Support	6
Warranty Information.....	6

Product Diagram

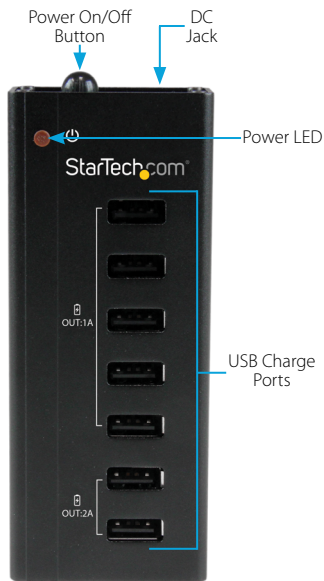

NOTE: The ST7CU35122 Charging Hub is designed with an Intelligent Control Chipset, which can detect the required charging mode of the different devices connected, and switch to the proper mode for “Full Speed charging” of that device (E.g. When an Apple device is connected, it will automatically charge to Apple Charging Mode specifications)

Introduction

Packaging Contents

- 1x USB Charging Hub
- 1x Wall Mount Brackets (w/screws)
- 4x Rubber Feet
- 1x Universal Power Adapter (NA/UK/EU)
- 1x Instruction Manual


System Requirements

- Available wall outlet

Installation

WARNING! Do Not Connect Devices which do not require charging into the charging ports of this device (e.g. USB Flash Drives, Card Readers, etc.)

1. Connect the included power adaptor to an AC outlet, then to the device.
2. Press the power button to turn the device on. Once the power LED is lit, it can charge devices.
3. Connect your device(s) to the corresponding port of the charging station (1A or 2A), according to the charging requirement your device(s).

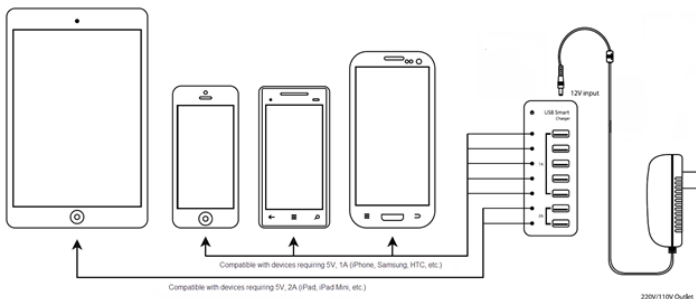

NOTE:

- a. The choice of charging mode is dependent upon what mode the connected device supports. The quantity of charging electricity provided is also dependent upon how much the connected device needs to get a full speed charge.
- b. Some devices with a 2A charging requirement can be charged in a 1A USB port, however, the provided power will be 1A and the charging time will be longer. Likewise, devices with a 1A charging requirement can be connected to a 2A USB port and the connected device will only draw the power that is required. It is recommended that you connect your devices to the proper USB ports based on the charging requirement of the connected device(s).
- c. The charging station may become warm to the touch during charging – this is normal and will not harm your connected device(s).
- d. With an exhausted battery, a Samsung Galaxy Note tablet will not display a charging icon when connected to the charging hub. After approximately one hour of low speed charging, the charging icon will show up and begin high speed charging.

Apple Mode definition:

Apple Mode is a proprietary charging mode developed by Apple, which redefines the other two pins of the USB connector, enabling them to send current and increase charging speed (same theory as DCP mode in BC 1.2 version, but with different voltage levels on the pins).

Detailed as follows:

1A Mode: VCC:5V/GND:5V/D+:2.0V/D-:2.7V (compatible with Apple products that need 1A current input, such as iPhones, iPods and iPads)

2A Mode: VCC:5V/GND:5V/D+:2.7V/D-:2.0V (compatible with Apple products that need 2A current input, such as iPads or iPad minis)

BC 1.2 Mode (Battery Charging Specification 1.2) definitions:

SDP: Standard Downstream Port, defined under USB 2.0 & 3.0 specification. Charging limits: 500mA / USB 2.0; 900mA/USB3.0

DCP: Dedicated charging Port, for charging only. To increase charging efficiency in DCP mode, D+ and D- will short out and cannot transmit data. ***ST7CU35122 uses this mode only.*

CDP: Charging Downstream Ports. USB ports under this mode can transmit data.

Specifications

Industry Standards	USB Battery Charging Specification Rev. 1.2
Ports	7
Connector(s)	7 x USB A (4 pin) Female
Color	Black
Enclosure Material	Aluminum
Dimensions (LxWxH)	110 x 45 x 24 mm
Weight	4.5 oz [127 g]
LEDs	1 x Power
Power Adapter	100-240V / 1.3A AC, type M plug
Operating Temperature	5°C to 35°C (41°F to 95°F)
Storage Temperature	-20°C to 50°C (-4°F to 122°F)
Humidity	20-80% RH

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.