

## 6U 12 in. Deep Wall-Mount Bracket for Patch Panels

WALLMOUNT6 -Rev SW

FR: Guide de l'utilisateur - fr.startech.com  
 DE: Bedienungsanleitung - de.startech.com  
 ES: Guía del usuario - es.startech.com  
 NL: Gebruiksaanwijzing - nl.startech.com  
 PT: Guia do usuário - pt.startech.com  
 IT: Guida per l'uso - it.startech.com


### Introduction

The WALLMOUNT6 is a sturdy and dependable storage option that provides 6U of space to mount your equipment in, to create a more efficient and accessible work environment. The mounting bracket features an all-steel design and is suitable for mounting patch panels or other slim 19 in. equipment.


### Packaging contents

- 1 x 6U wall mount rack
- 4 x M5-25 mm flat-head screws
- 4 x plastic anchors
- 1 x metal panel (stabilizing bracket)
- 4 x M4-8 mm self-tapping bracket screws
- 12 x M6 cage nuts
- 12 x M6 screws
- 1 x M6 lock washer
- 1 x M6 flat washer
- 1 x M6 nut
- 1 x instruction manual


### Product diagram

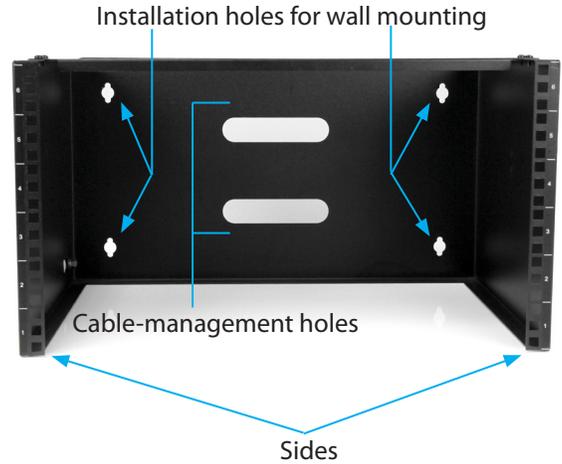

Front view

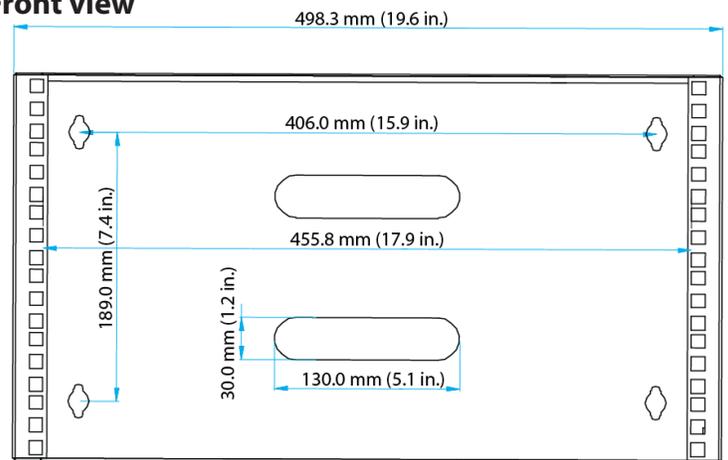

View looking down on the WALLMOUNT6

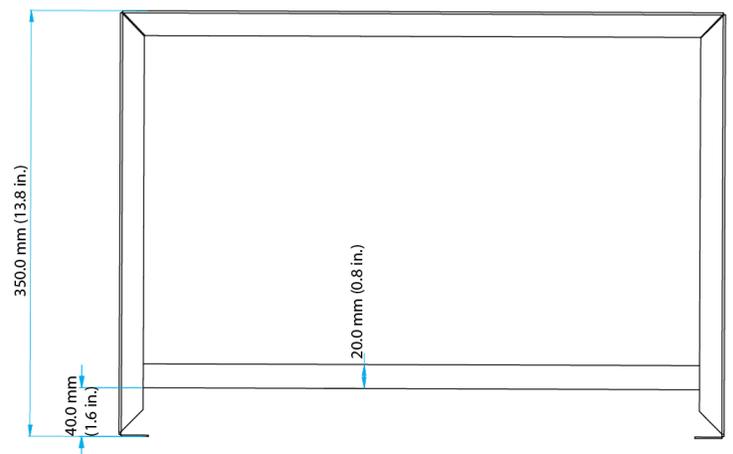

\*actual product may vary from photos

## Assemble the WALLMOUNT6

**Warning!** The WALLMOUNT6 can support up to 44.2 lb (20 kg). If you exceed the weight limit, the WALLMOUNT6 may not function as expected.

### Use wall studs to attach the WALLMOUNT6 to a wall

The installation holes for wall mounting are 16 in. on center to allow for wall-stud mounting.

1. Attach the included stabilizing bracket.
2. Find the wall studs in the wall where you want to attach the WALLMOUNT6.
3. Insert the four M5-25 mm flat-head screws through the installation holes for wall mounting on the WALLMOUNT6 and then into the studs in the wall.

**Note:** If you attach the WALLMOUNT6 using wall studs, you don't need to use the plastic anchors.

### Use plastic anchors to attach the WALLMOUNT6 to a wall

1. Attach the included stabilizing bracket.
2. Align the plastic anchors with the installation holes for wall mounting on the WALLMOUNT6.
3. Determine where on the wall you want to attach the WALLMOUNT6, making sure to align the plastic anchors with the installation holes for wall mounting.
4. Hammer the plastic anchors into the wall.
5. Insert the four M5-25 mm flat-head screws through the installation holes for wall mounting on the WALLMOUNT6 and into the plastic anchors in the wall.

## Add equipment to the WALLMOUNT6

Use the included M6 cage nuts, screws, and washers to install equipment in the WALLMOUNT6.

### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

### Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit [www.startech.com/downloads](http://www.startech.com/downloads)

### Warranty Information

This product is backed by a lifetime warranty.

StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.