



## User Guide

This is a 「User Guide」 installed on the TV.


The contents of this guide are subject to change without prior notice for quality improvement.

## ☐ To view programme information

Displays information on current programme and / or current time, etc.

- 1 Move the pointer of the Magic remote control to the top of the TV screen.
- 2 Click the activated channel banner area.
- 3 The programme details will be displayed at the bottom of the TV screen.

✎ Image shown may differ from your TV.

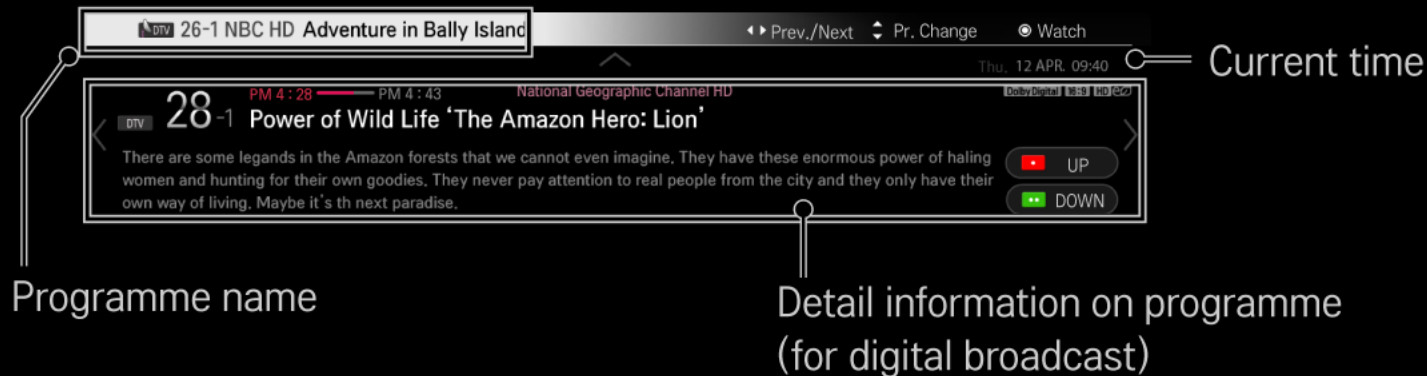

## ❑ To set favourite programmes

SMART  ⇒ Settings → SETUP → Programme Edit

- 1 Move to the desired programme and press **Wheel (OK)** button. Programme is selected.
- 2 Press **Set as Favourite**.
- 3 Select the desired **Favourite Pr. Group**.
- 4 Select **OK**. Favourite is set.

## ❑ To use Favourite

SMART  ⇒ Pr. List


Programme list will appear. Selects the desired preset favourite programme from Favourite List A to D.

# SMART => TV Guide

[In Digital Mode Only]

Obtains information about programmes and airing times. Obtains programme information and schedules viewing / recording.

[Image shown may differ from your TV.]

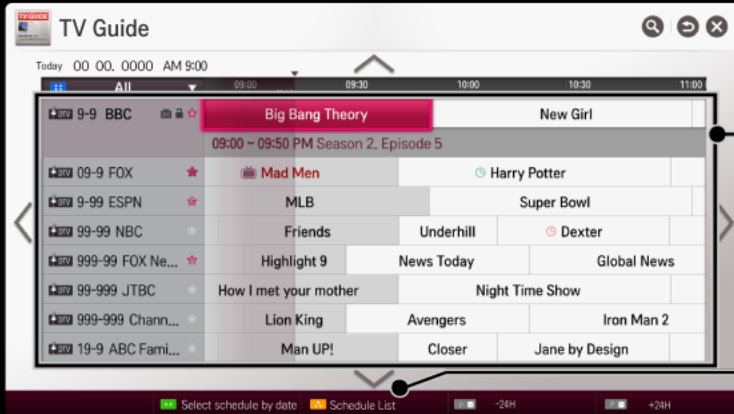

Press **Wheel (OK)** button after moving to a programme of your choice to view or view / record.




After viewing the schedule list, makes revisions or deletions.

Makes schedule reservation by selecting date / time / programme. Makes repeat schedule reservation.

# ❑ Automatically Setting Up Programme

**SMART**  ⇒ **Settings** → **SETUP** → **Auto Tuning**

Automatically tunes the programmes.

- 1 Select Country where the TV is used. Programme settings change depending on the country you choose.
  - 2 Initiate **Auto Tuning**.
  - 3 Select Input Source of your choice.
  - 4 Set Auto Tuning following screen instructions.
-  If Input Source is not connected properly, programme registration may not work.
  -  **Auto Tuning** only finds programmes that are currently broadcasting.
  -  If **Lock System** is turned on, a pop-up window will appear asking for password.

## □ Cable DTV Setting option

When searching for programmes using FULL setting it can take a long time. The following values are needed in order to search all available programmes quickly and correctly. The commonly used values are provided as “default”.

Frequency	Enter a user-defined frequency.
Symbol rate	Speed at which a device such as modem sends symbols to a programme.
Modulation	Loading of audio or video signals onto carrier.
Network ID	Unique identifier allocated for each user.
Start Frequency	Enter a user-defined start frequency range.
End Frequency	Enter a user-defined end frequency range.

## □ Satellite Setting Option

Satellite	Select your desired Satellite.
LNB Frequency	[Depending on country] Select one value from 9750/10600, 9750/10750, 9750, 10600, 10750, 5150, MDU1, MDU2, MDU3, MDU4, MDU5. If you select 9750/10600, 9750/10750(MHz), 22KHz Tone is disabled. If you cannot find the LNB frequency value from the list, select User and manually enter the frequency.
Transponder	Select the transponder you want to tune.
22KHz Tone	When using 22KHz Tone switch, select A or B. If you use 22KHz Tone, Unicable and Motor Type are disabled.

LNB Power	To enable the power supply for the LNB, select On. If you select Off, Motor Type is disabled.
DiSEqC	When using DiSEqC, select one option from A~D/ToneA~B. If you use DiSEqC, Unicable and Motor Type are disabled.
Unicable Settings	Select On to use Unicable and set the Unicable in the Unicable Setting menu. When Unicable is enabled, 22KHz Tone, DiSEqC, Motor Type are disabled.
Motor Type	Select Motor Type to use Motor and set the Motor in the Motor Setting menu. When Motor is enabled, 22KHz Tone, DiSEqC, Unicable are disabled.



- ✎ If you set satellite to others, you must add a transponder using Manual Tuning.
- ✎ When selecting 22KHz Tone and DiSEqC, you must connect them in the same position as displayed on the OSD.
- ✎ If you delete a Satellite, all programmes stored in the Satellite are deleted.

## □ Motor Setting Option

- DiSEqC 1.2 : Control motor to change satellite dish position.

Drive Direction	Select the direction in which you want to move the motor.
Drive Mode	Two modes are available : Step and Continuous. <ul style="list-style-type: none"><li>• <b>Step</b> : The motor moves based on the value you enter (from 1 to 128).</li><li>• <b>Continuous</b> : The motor moves continuously until you press the Stop.</li></ul>
Test TP	Select the test TP you want to tune.

Set Limit	<p>Set the motor movement to east or west to have the motor move only within the direction set.</p> <ul style="list-style-type: none"><li>• On : You can limit the movement to the current direction by selecting the West/East.</li><li>• Off : You can cancel the limit you set.</li></ul>
Go To Zero	<p>You can move the motor to Zero.</p>
Store	<p>You can save the motor's current direction.</p>

- USALS : Set your current location (Longitude/Latitude).

## ❑ Cable DTV Setting

SMART  ⇒ Settings → SETUP → Cable DTV Setting

[If the program mode is set to Cable]

Service Operator	<p>Set Service Operator.</p> <p>When changing Service Operator, the existing saved programmes are deleted and Auto Tuning runs.</p>
Channel Auto Update	<ul style="list-style-type: none"><li>• On : You can update information for all the programmes that can be updated, including the programme currently being watched.</li><li>• Off : You can only update information for the programme currently being watched.</li></ul>

- ✎ The range that a user can select from the Service Operator menu differs depending on number of Service Operator supported by each country.
- ✎ If number of supported Service Operator for each country is 1, corresponding function becomes inactive.
- ✎ You can not select the Cable DTV Setting when the service operator is set to “Ziggo” .

## ☐ Satellite Setting

**SMART**  ⇒ **Settings** → **SETUP** → **Satellite Setting**

[If the programme mode is set to Satellite]

You can add/delete/set the satellite you want.

## ❑ Tivu Programme List Update

**SMART**  ⇒ Settings → **SETUP** → Tivu Programme List Update

[Only Italy]

[If the programme mode is set to Satellite]

It updates the changed Programme List information by based on country broadcasting circumstance and satellite.

It updates the Programme List when the TV turn off all the time. After updates, the Programme List may be changed. If not want, select Off.

## □ Programme List Update

SMART  ⇒ Settings → SETUP → Programme List Update

[If the programme mode is set to Satellite]

It updates the changed Programme List information by based on country broadcasting circumstance and satellite.

It updates the Programme List when the TV turn off all the time. After updates, the Programme List may be changed. If not want, select Off.

- ✎ For Austria, Czech, France, Slovakia, Spain, Turkey, Norway, Sweden, Finland, Denmark, Germany, Poland and Russia, this function is supported when Service Operator is not set to None.



## ❑ Regional Programme

SMART  ⇒ Settings → SETUP → Regional Programme

[Only Austria]

[If the programme mode is set to Satellite]

Set region broadcasting and watch region broadcasting at a specific time.


 To set Service Operator of Satellite, AKTIV must be selected.

## ❑ Transponder Edit

SMART  ⇒ Settings → SETUP → Transponder Edit

[If the programme mode is set to Satellite]

You can add/modify/delete a transponder.

 If Country is set to Russia, press the Register as Home TP button on the screen to set the desired transponder to Home.

[In Russia, satellite SO is set to NTV-PLUS and Tricolor TV.]

## ☐ To use Manual Tuning

SMART  ⇒ Settings → SETUP → Manual Tuning

Adjusts programmes manually and saves the results.

For digital broadcasting, signal strength and signal quality can be checked.

 You can also adjust the frequency (KHz) and Bandwidth.

## ☐ To edit programmes



**SMART**  ⇒ **Settings** → **SETUP** → **Programme Edit**

Edits the saved programmes.

Set as favourite programme, block/unblock programme, skip programme etc. of the selected programme.

## SMART ⇒ Settings → SETUP → Programme Mode

This function allows you to watch a tuned program in Antenna, Cable, Satellite, or CAM Mode.

-  You can only watch programs in the selected mode.
-  The CAM menu is only available when the CAM Mode is enabled. The menu name may vary depending on the CAM type.


**123** (Magic Remote Control) ⇒  (Screen Remote Control)

(or press the **TEXT** button.)

[Depending on country]

Teletext is a free service provided by the TV station that offers text-based information about TV programmes, news and weather.

The teletext decoder of this TV can support the SIMPLE, TOP and FASTEXT systems.




Colour button	To select the preceding or following page.
Number button	Enters the page number to move to.
	To select the preceding or following page.

## ❑ Special Teletext Function

123 (Magic Remote Control) ⇒ T.OPT (Screen Remote Control)

(or press the T.OPT button.)

Select the Text Option menu.

 Index	Select each index page.
 Time	When viewing a TV programme, select this menu to display the time at the top right hand corner of the screen.
 Hold	Stops the automatic page change which will occur if a teletext page consists of 2 or more sub pages.



Reveal

Select this menu to display concealed information, such as solutions to riddles or puzzles.



Update

Displays the TV picture on the screen while waiting for a new teletext page.

Language

[In Digital Mode Only]  
Sets Teletext language.






1 2 3 (Magic Remote Control) ⇒  (Screen Remote Control)

(or press the **TEXT** button.)


[In UK/Ireland only]

The TV gives you access to digital teletext which gives much better text, graphics etc. than older analogue teletext. This digital teletext can access special digital teletext services and specific services which broadcast digital teletext.

## □ Teletext within digital service

- 1 Press the numeric or **P**  button to select a certain service which broadcasts digital teletext.
- 2 Follow the indications on digital teletext and move onto the next step by pressing  (Magic Remote Control), **TEXT**, Navigation, Red, Green, Yellow, Blue or NUMBER buttons etc..
- 3 Press the number or **P**  button to use a different digital teletext service.

## □ Teletext in digital service


- 1 Press the numeric or **P**  button to select a certain service which broadcasts digital teletext.
- 2 Press the **TEXT** or colour button to switch on teletext.
- 3 Follow the indications on digital teletext and move onto the next step by pressing **1****2****3** (Magic Remote Control), Navigation, Red, Green, Yellow, Blue or NUMBER buttons etc..
- 4 Press the **TEXT** or colour button to switch off digital teletext and return to TV viewing.

## ☐ To Set MHP Auto Start

**SMART**  ⇒ **Settings** → **OPTION** → **MHP Auto Start**

[Depending on model] [In Italy only]

This function Auto Starts the MHP function, Italian data broadcast. Use in programme with MHP signal. Data broadcast function may not be smooth due to situation from the broadcasting station.

 MHP is not available while using Time Machine II .

## ❑ What is HbbTV?

[Depending on model] [Depending on Country]

The HbbTV or Hybrid Broadcast Broadband TV replaces existing analogue teletext services with a new-generation, web-based interactive broadcasting service. Similar to digital text and EPG, HbbTV can be used to provide a variety of services in addition to standard broadcast content.

The functionality and quality of the HbbTV service may vary depending on your broadcast service provider.

This function may not be available in some countries.

In France, the HbbTV service is available via terrestrial broadcasting.

In Germany, it is available via terrestrial, cable and satellite broadcasting.





In Spain, the HbbTV service is available via terrestrial broadcasting. The content and the applications depends on the Broadcaster.


For more information about HbbTV, visit [www.hbbtv.org](http://www.hbbtv.org).

## ☐ To use HbbTV

**SMART**  ⇒ **Settings** → **OPTION** → **HbbTV**

Sets HbbTV to On. Enjoy a variety of content on the HbbTV service.

-  The service may be limited when the device is not connected to the internet.
-  You can control HbbTV using the direction keys, and point and click function of the Magic Remote Control are not supported.
-  If **HbbTV** is set to **On**, the Motion Recognition function does not work.
-  If **HbbTV** is set to **On**, the PenTouch function does not work. (Only PenTouch TV.)

**SMART**  => **Settings** → **OPTION** → **Data Service**

[Depending on country]

This function allows users to choose between MHEG (Digital Teletext) and Teletext if both exist at the same time.

If only one of them exists, either MHEG or Teletext is enabled regardless of which option you selected.

## SMART => Settings → SETUP → CI Information


- This function enables you to watch some encrypted services (pay services).
- If you remove the CI Module, you cannot watch pay services.
- CI (Common Interface) functions may not be possible depending upon the country broadcasting circumstances.
- When the module is inserted into the CI slot, you can access the module menu.
- To purchase a module and smart card, contact your dealer.




- When the TV is turned on after inserting a CI Module, you may not have any sound output. The Smart Card may not be compatible with the CI module.
- When using a CAM(Conditional Access Module), please make sure it meets fully the requirements of either DVB-CI or CI plus.
- An abnormal process of CAM(Conditional Access Module) may cause a bad picture.
- [Depending on model] If the TV does not display any video and audio when CI+ CAM is connected, please contact to the Terrestrial/Cable/Satellite Service Operator.

## SMART ⇒ Settings → PICTURE → Aspect Ratio

Selects the screen aspect ratio.

16:9	Resizes images to fit the screen width.
Just Scan	Displays video images in the original size without removing parts of the edge of the image.  In DTV/HDMI/Component (over 720p) mode, <b>Just Scan</b> is available.
Original	When your TV receives a wide screen signal it will automatically change to the picture format broadcasted.

Full Wide	<p>When TV receives the wide screen signal, it will let you adjust the picture horizontally or vertically, in a linear proportion, to fill the entire screen fully.</p> <p>4:3 and 14:9 video is supported in full screen without any video distortion through DTV input.</p> <p> In Analog/DTV/AV/Scart mode, Full Wide is available.</p>
4:3	<p>Resizes images to the previous standard 4:3.</p>
14:9	<p>You can view a picture format of 14:9 or a general TV programme in the 14:9 mode. The 14:9 screen is viewed in the same way as in 4:3, but is moved up or down.</p>
Zoom	<p>Resizes the image to fit the screen width. The top and bottom parts of the image may be cut off.</p>
Cinema Zoom	<p>Choose Cinema Zoom when you want to enlarge the picture in correct proportion.</p>

- ✎ While viewing an external device, these cases may result in image burn:
  - a video with stationary caption (such as network name)
  - 4 : 3 aspect ratio mode for an extended period

Take caution when using these functions.

- ✎ Available picture size may differ depending on the input signal.
- ✎ The screen aspect ratios on HDMI-PC input are available in 4:3 and 16:9 only.
- ✎ [For models supporting 2160p] When a 2160p signal is input or your PC resolution is set to 3840 x 2160, the **Aspect Ratio** is fixed to **Just Scan**.

## SMART ⇒ Settings → PICTURE → Energy Saving

Reduces power consumption by adjusting screen brightness.

Off	Turns off Energy Saving mode.
Minimum / Medium / Maximum	Applies the pre-set Energy Saving mode.
Screen Off	Screen is turned off and only sound is played. Press any button on the remote control to turn the screen back on.

## SMART => Quick Menu → AV Mode

Sets the best picture / audio optimized for different AV modes.

Off	Operates with the value set in the picture / sound menu.
Cinema	Optimizes picture and audio settings for movies.
Game	Optimizes picture and audio settings for games.

## ❑ To adjust pictures with Picture Wizard

**SMART**  ⇒ **Settings** → **PICTURE** → **Picture Wizard II**

Use the remote control and follow the instructions of the Picture Wizard to calibrate and adjust for optimum picture quality without expensive pattern devices or help from a specialist.

Follow the instructions to obtain the optimum picture quality.

## ❑ To select Picture Mode

SMART  ⇒ Settings → PICTURE → Picture Mode

Selects the picture mode optimized for the viewing environment or the programme.

Vivid	Heightens contrast, brightness and sharpness to display vivid images.
Standard	Displays images in standard levels of contrast, brightness and sharpness.
Eco / APS	[Depending on country] The Energy Saver feature changes settings on the TV to reduce power consumption.
Cinema / Game / Photo	Displays the optimum picture for movie, game and photo (still image).









Expert

Menu for adjusting picture quality that allows experts and amateurs to enjoy the best TV viewing. This menu is ISF-certified and provided for picture tuning experts. (ISF logo can only be used on ISF-certified TV units.)

ISFccc : Imaging Science Foundation Certified Calibration Control

-  Depending on the input signal, the available range of picture modes may differ.
-   Expert mode is for picture tuning professionals to control and fine-tune using a specific image. For normal images, the effects may not be dramatic

## ❑ To fine-tune picture mode

**SMART**  ⇒ Settings → PICTURE → Picture Mode → Panel Light / Contrast / Brightness / Sharpness / Colour / Tint / Colour Temp.

First select a Picture Mode of your choice.

Panel Light	Adjusts the screen brightness by changing the brightness of the PDP panel.
Contrast	Adjusts the difference between bright and dark regions of the screen.
Brightness	Adjusts the overall screen brightness.
Sharpness	Adjusts the sharpness of the borders between bright and dark.

Colour	Adjusts the colours on the screen darker or lighter.
Tint	Adjusts the red/green colour balance.
Colour Temp.	Adjusts the overall tone of colours to warm or cool.

- ✎ Depending on the input signal or other picture settings, the range of detailed items for adjustment may differ.

## ❑ To set advanced control


**SMART**  ⇒ **Settings** → **PICTURE** → **Picture Mode** → **Advanced control/Expert Control**

Calibrates the screen for each picture mode or adjusts picture settings for a special screen. First select a **Picture Mode** of your choice.

Dynamic Contrast	Adjusts contrast and colour to the optimal level according to the screen's brightness.
Dynamic Colour	Adjusts colours for more natural-looking colours.

Preferred Colour	Skin Colour : Skin colour spectrum can be separately set to implement the skin colour as defined by the user.
	Grass Colour : Natural colour spectrum (meadows, hills, etc.) can be separately set.
	Sky Colour : Sky colour is set separately.
Super Resolution	Provides a crystal-clear picture by improving the details in areas where the picture is blurry or unclear.
Gamma	Sets the gradation curve according to the output of the picture signal in relation to the input signal.
Colour Gamut	Selects the range of colours that can be expressed.
Edge Enhancer	Shows clearer and distinctive yet natural edges of the video.

Colour Filter	Filters a specific colour spectrum in RGB colours to fine-tune colour saturation and hue accurately.
Expert Pattern	Patterns used for expert adjustment.
White Balance	Adjusts the overall tone of the screen as desired. In Expert mode, detailed fine-tuning can be set via the Method / Pattern etc.
Colour Management System	This is a function used by experts when they adjust colours using a test pattern of six colours (Red / Green / Blue / Cyan / Magenta / Yellow) without affecting other colour areas. For normal images, adjustments may not result in noticeable colour changes.

 Depending on input signal or other picture settings, the range of detailed items for adjustment may differ.


## ❑ To set additional picture options

**SMART**  ⇒ **Settings** → **PICTURE** → **Picture Mode** → **Picture Option**

Adjusts detailed setting for images.

Noise Reduction	Reduces screen noise in the video.
MPEG Noise Reduction	Eliminates noise generated while creating digital picture signals.
Black Level	Adjusts the brightness or darkness of the screen to suit the black level of the picture input using the degree of darkness (black level) of the screen.
Real Cinema	Optimizes the screen for movie viewing.

Eye Care	[Depending on model] Adjusts screen brightness to prevent eye glare.
Motion Eye Care	[Depending on model] Saves power consumption by adjusting the brightness corresponding to the movement of the image on the screen.

 Depending on input signal or other picture settings, the range of detailed items for adjustment may differ.



## ❑ To reset Picture Mode

SMART  ⇒ Settings → PICTURE → Picture Mode → Picture Reset


Resets values customized by the user.

Each picture mode is reset. Select the picture mode you wish to reset.


# SMART ⇒ Settings → PICTURE → Picture Mode → Picture Option → TruMotion

Corrects images to display smoother motion sequences.

Smooth	De-Judder value is set to 3.
Clear	De-Judder value is set to 7.
User	De-Judder can be set manually. <ul style="list-style-type: none"><li>• De-Judder : This function adjusts juddering of the screen.</li></ul>

 If the video signal is 60Hz, TruMotion may not work.

## ❑ To use Sound Mode

SMART  ⇒ Settings → SOUND → Sound Mode

Optimizes TV audio to the selected sound mode.

Standard	Suitable for all types of video.
Music / Cinema / Sport / Game	[Depending on model] Sets audio optimized for a specific genre.
User Setting	Adjusts the volume to a level of your choice using the User EQ.

## ❑ To fine-tune the volume

SMART  ⇒ Settings → SOUND → Sound Mode → User EQ

Sets Sound Mode at User Setting first.

100 Hz / 300 Hz / 1 kHz / 3 kHz / 10 kHz	Sets EQ by manual adjustment of sound bands.
Reset	Resets the equalizer value changed by the user.

## ❑ To use Smart Sound Mode

**SMART**  ⇒ **Settings** → **SOUND** → **Smart Sound Mode**

Provides the optimized sound adjusted for each content type.

- ✎ If the Smart Sound Mode function is enabled, Sound Mode, Virtual Surround Plus and Clear Voice II are automatically adjusted.


## ❑ To use Virtual Surround sound

**SMART**  ⇒ **Settings** → **SOUND** → **Virtual Surround plus**

LG's proprietary audio processing technology allows 5.1ch-like surround sound from two speakers.


 If Clear Voice II is set to ON, Virtual Surround plus will not be chosen.

## ❑ To use Clear Voice II function

**SMART**  ⇒ **Settings** → **SOUND** → **Clear Voice II**

Boosts voice clarity.

## ☐ To set Volume Mode

SMART  ⇒ Settings → SOUND → Volume Mode

Sets various modes for volume control.

Auto Volume	Sets <i>Auto Volume</i> to <i>On</i> . Different volume outputs from programme to programme. They are then automatically adjusted for convenient TV watching, when clicking through different programme.
Volume Control	Using a single volume curve may result in an inaudible or loud sound depending on the environment. Adjusts volume levels depending on the time of day (day/night).

## ❑ To synchronize audio and video

**SMART**  ⇒ **Settings** → **SOUND** → **AV Sync. Adjust**

Synchronizes video and audio directly when they do not match.

If you set **AV Sync. Adjust** to **ON**, you can adjust the sound output (TV speakers or SPDIF) to the screen image.

### TV Speaker

Adjusts the synchronization of the sound from the TV's internal speakers.

The "-" button makes the sound output faster and the "+" button slower than the default value.



## External Speaker

Adjusts how the sound is synced from external speakers, such as an external speaker connected to the digital audio output port, LG audio device and headphone.

The "-" button makes the sound output faster and the "+" button slower than the default value.



LG audio device is supported only for models with the optical digital port.

## Bypass

Outputs broadcasting signals or the audio of an external device without audio delay. Audio may be output before video as it takes time to process video input into the TV.

## ❑ To use Sound Option Setting

**SMART**  ⇒ **Settings** → **SOUND** → **Sound Option Setting**

### ❑ **Analogue Out**

[Depending on model]

Allows the user to select the **Headphone** or **External Speaker (Audio Out)** menu depending on the device connected.

### ❑ **Balance**

Adjusts left/right audio balance.

## □ Sound Optimizer

[Depending on model]

Allows optimized sound for custom TV installation.

Normal	General sound mode.
Wall Mount Type	Optimizes sound for a wall-mounted TV.
Stand Type	Optimizes sound for a stand-mounted TV.

## ❑ To use TV's speakers

**SMART** 🏠 ⇒ Settings → SOUND → Sound Out → TV Speaker

Sound is output through the TV speaker.

## ❑ To use External Speaker

**SMART** 🏠 ⇒ Settings → SOUND → Sound Out → External Speaker  
(Optical/HDMI ARC)


[Only available for models with an optical or HDMI (ARC) port]

Sound is output through the speaker connected to the optical port.

👉 Simplink is supported.

## □ To use ARC mode

[Depending on model]

**SMART**  ⇒ **Settings** → **SOUND** → **Sound Out** → **External Speaker (Optical/HDMI ARC)** → **ARC Mode**


External audio devices can be connected via High-Speed HDMI® cable without an extra optical audio cable to output SPDIF. It interfaces with SimpLink.

For an external device that supports ARC (Audio Return Channel), connect it to the **HDMI(ARC)** port.

Off	Even when the connected ARC-supported external audio device is turned on, audio output is not automatically processed through the external audio device's speakers.
On	If ARC-supported external audio device is turned on, audio output is automatically processed through the external audio device speakers. For SimpLink, refer to 「User Guide → OPTION → To use input device」.

- ✎ Connect to ARC-only terminal when connecting to external devices.
- ✎ Use high-speed HDMI® cable when connecting to external devices.
- ✎ Use of a third-party device with an ARC function may cause malfunctions.

## ❑ To use Digital Sound Out

**SMART**  ⇒ **Settings** → **SOUND** → **Sound Out** → **External Speaker(Optical/HDMI ARC)** → **Digital Sound Out**


Sets up Digital Sound Output.


Item	Sound Input	Digital Sound output
Auto	MPEG	PCM
	Dolby Digital	Dolby Digital
	Dolby Digital Plus	Dolby Digital
	HE-AAC	Dolby Digital
PCM	All	PCM


## ❑ To connect and use LG audio device

LG audio device allows you to enjoy rich powerful sound easily.


### ❑ Wired Connection


**SMART  ⇒ Settings → SOUND → Sound Out → LG Sound Sync (Optical)**

Connect LG audio device with the  logo to the optical digital audio output port.

 Only available for models with the optical digital port.

### ❑ Wireless Connection

**SMART  ⇒ Settings → SOUND → Sound Out → LG Sound Sync (Wireless)**

LG audio device with the  logo can be connected wirelessly.



- ✎ You can use the TV remote control to adjust the volume of the connected device.
- ✎ When wirelessly connecting, attach the dongle and connect it if the model needs the Magic Remote Control dongle. To purchase a Magic Remote Control dongle, please contact the LG Electronics Service Centre.
- ✎ For wireless connection, if the device fails to connect. Check the device power to connect and if the LG Audio device is in a proper operating condition.

- ✎ If you select **LG Sound Sync (Wireless)**, devices available for connection are searched and one of searched devices is automatically connected. When a device is connected, its name is shown.
- ✎ If two or more devices are detected, the first detected device is connected first. To view more detected devices to connect, press the Show More button.
- ✎ If **LG Sound Sync (Wireless)** is being selected and you turn on the TV, it search and try to connect the device which recently connected.



## □ DTV Sound Setting

SMART  ⇒ Settings → SOUND → DTV Sound Setting

[Depending on model]

When different audio types exist in an input signal, this function allows you to select the audio type you want.


If set to **AUTO** the search order is HE-AAC → Dolby Digital+ → Dolby Digital → MPEG and output is produced in the first Audio Format found.

-  The following search order may change depending on the country: HE-AAC → Dolby Digital+ → Dolby Digital → MPEG.
-  If the selected Audio Format is not supported, another Audio Format may be used for output.

# ☐ To select an external input

SMART  ⇒ Input List

Selects external input.

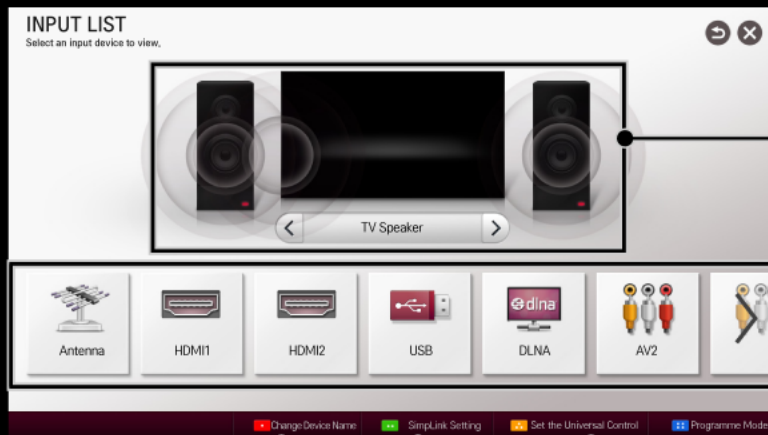

Selects speaker.

Selects input.

Sets the Programme mode.  
[Depending on country]



Edits the name of external  
device connected to  
external terminal.


Sets Simplink.

Sets OSS.  
[Depending on country]

## ❑ To use SimpLink

SimpLink is a feature that enables you to control and manage various multimedia devices conveniently using the TV remote control only via the SimpLink menu.

- 1 Connect the TV's **HDMI IN** terminal with the SimpLink device's HDMI output terminal using an HDMI cable. For home theatre units with a SimpLink function, connect HDMI terminals as above, and use an optical cable to connect Optical Digital Audio Out from the TV to Optical Digital Audio In of the SimpLink device.
- 2 Select **SMART**  ⇒ SimpLink. SimpLink menu window appears.
- 3 Select **Set SimpLink** on SimpLink menu window. SimpLink setup window appears.
- 4 Set **SimpLink** to **On** in SimpLink setup window.
- 5 Close SimpLink setup window.
- 6 Select the device to control from **SMART**  ⇒ SimpLink.

- ✎ This function only works on devices with the SimpLink logo (  ). Verify that the external device has a SimpLink logo.
- ✎ To use the SimpLink function, you need to use a high-speed HDMI® cable (with CEC, or Consumer Electronics Control, feature added). High-speed HDMI® cables have the No. 13 pin connected for information exchange between devices.
- ✎ Turn on or select the media of a device with home theatre features to see the speaker switch to **External Speaker**.
- ✎ Connect with an Optical cable (sold separately) to use **External Speaker**.
- ✎ Switching to external input causes devices operating with SimpLink to stop.
- ✎ Use of a third-party device with HDMI-CEC features may cause malfunctions.
- ✎ Optical cable connection is supported only for models with the optical digital port.

## □ Explanation of SimpLink features

Direct Play	Plays the multimedia device on the TV instantly.
Select multimedia device	Selects the desired device via the SimpLink menu to control it from the TV screen instantly.
Disc playback	Manages the multimedia device with the TV remote control.
Power off all devices	If the Auto Power function is set to On in the SimpLink settings, turning the TV off will turn the power off on all SimpLink-connected devices.

Sync Power on	If the Auto Power function is set to On in the SimpLink settings, turning on a SimpLink device will turn the TV on.
Speaker	Selects speaker either on the home theatre unit or the TV.



## ☐ To use Sleep Timer

**SMART**  ⇒ **Settings** → **TIME** → **Sleep Timer**

Turns off the TV after a preset number of minutes.

To cancel the Sleep Timer, select Off.

## ☐ To set current time

SMART  ⇒ Settings → TIME → Clock

Checks or changes the time while watching TV.



Auto	Synchronizes the TV clock to the digital time information sent by the TV station.
Manual	Sets the time and date manually if the auto setup does not correspond to the current time.

## ❑ To set the TV to turn on and off automatically

SMART  ⇒ Settings → TIME → On Time/Off Time

Sets On/Off time.

Select Off on Repeat to discontinue On Time/Off Time.


-  To use On Time/Off Time, set the current time correctly.
-  Even when the On Time function is on, the TV will turn off automatically in 120 minutes when no button is pressed within that time.

## ❑ To set Automatic Standby

**SMART**  ⇒ **Settings** → **TIME** → **Automatic Standby**

[Depending on model]

If you do not press any button on the TV or remote control for a certain period, the TV will automatically switch to standby mode.

 This function does not work on Store Demo mode or while software update.

## ☐ To set password

SMART  ⇒ Settings → LOCK → Set Password

Sets or changes TV password.

✎ The initial password is set as 「0000」.

When France is selected for Country, password is not 「0000」 but 「1234」.

When France is selected for Country, password cannot be set as 「0000」.

## ❑ To lock system

**SMART**  ⇒ **Settings** → **LOCK** → **Lock System**

Permits only specific programmes by blocking channels or external input.

Select the **Lock System** to **On**.

<b>Block Programme</b>	Blocks the programmes that contain inappropriate contents for children. The programmes can be selected but the screen is blank and the audio is muted. To watch a locked programme, enter the password.
------------------------	--

Parental  
Guidance

This function operates according to information from the broadcasting station. Therefore if the signal has incorrect information, this function does not operate.  
Prevents children from watching certain adult's TV programmes, according to the ratings limit set.  
Enter a password to watch a blocked programme.  
Rating differs by country.

Input Block


Block the input sources.

Application  
Lock

Lock the Application.

## SMART ⇒ Settings → OPTION → Language(Language)

Selects Menu Language and Audio Language displayed on the screen.

Menu Language	Selects a language for the display text.
Audio Language	[In Digital Mode Only] When watching a digital broadcast containing several audio languages, you can select the language you want.
Subtitle Language	[In Digital Mode Only] Use the Subtitle function when two or more subtitle languages are broadcast.  If subtitle data in a selected language is not broadcast, the default language subtitle will be displayed.



## Text Language

[In Digital Mode Only]

Use the Text language function when two or more Text languages are broadcast.

- ✎ If teletext data in a selected language is not broadcast, the default Text language will be displayed.
- ✎ If you select the wrong local country, teletext may not appear correctly on the screen and some problems may occur during teletext operation.

## Voice Recognition Language

Select the language to make voice search.




- ✎ Only the voice search adopted model can support this setting.

## SMART ⇒ Settings → OPTION → Country

[Depending on country]

Sets the country that the TV uses.

TV settings are changed according to the broadcast environment of the selected country.

-  If the country setting is changed, the **Auto Tuning** information screen may appear.
-  In a country that Digital broadcasting regulation isn't fixed, some DTV functions may not work depending on digital broadcasting circumstances.
-  If the country setting is set to “--”, European terrestrial digital standard broadcasting programmes are available, but some DTV functions may not work properly.

## SMART ⇒ Settings → OPTION → Disability Assistance

Audio commentary or subtitles are provided for those who are hard of hearing or visually impaired.

Hard of Hearing	This function is used for the hearing impaired. If it is set to on, the subtitle is displayed by default.
Audio Description	This function is for the blind, and provides explanatory audio describing the current situation in a TV programme in addition to the basic audio. When <b>Audio Description</b> is selected <b>On</b> , basic audio and Audio Description are provided only for those programmes that have Audio Description included.



## ❑ To register the Magic Remote Control

To use the Magic Remote Control, register it with your TV first.

Register Magic Remote Control as follows before use.

- 1 Turn on the TV and wait for about 10 seconds and then press **Wheel(OK)** button while pointing the remote control at the TV.
  - 2 The remote control is automatically registered and the registration completion message appears on the TV screen.
- ✎ If you failed to register the Magic Remote Control, turn off the TV and try again.


## ❑ To re-register the Magic Remote Control

- 1 Press the **SMART**  and **BACK** buttons together for about 5 seconds.
  - 2 Press the **Wheel (OK)** button towards the TV to re-register the Magic Remote Control.
- ✎ Press the **SMART**  button and **BACK** button at the same time, for five seconds, to reset the Magic Remote Control.
  - ✎ Press the **BACK** button while pointing the remote control at the TV for five seconds to reset and re-register it.

# ❑ To set the pointer of the Magic Remote Control

SMART  ⇒ Settings → OPTION → Pointer

Sets the speed and shape of the pointer that appears on the TV screen.

Speed	Sets the moving speed of the pointer.
Shape	Selects a pointer shape from various options.
Size	Chooses the size of the pointer.
Alignment	<p>Set to <b>On</b>. If there is any misalignment between the pointer and the actual direction the remote control indicates, move the Magic Remote Control left and right to realign. The pointer will automatically realign to the centre, making it easier to control.</p> <p> If it is set to <b>Off</b>, the Alignment function will not work even when you move the Magic Remote Control left and right.</p>


- ✎ If the pointer has not been used for a certain period of time, it will disappear. When the pointer disappears from the screen, shake the Magic Remote Control to the right and left. Then, it appears again.
- ✎ If you press the Navigation button while moving the pointer on the screen, the pointer disappears, and the Magic remote control works as a common remote control.
- ✎ Use within an effective distance of 33 ft. (10 metres). Using the Remote Control from greater distances or when obstructions block the sight line may cause malfunctions.

- ✎ Electronic devices nearby may cause communication interference. Devices such as microwave ovens and wireless LANs use the same frequency range (2.4 GHz) as the Magic Remote Control and may cause interference.
- ✎ The Magic Remote Control may be broken if dropped or damaged in any other way.
- ✎ Take care not to bang it against other hard objects such as furniture or the floor.



## ❑ To use the pattern gesture function

Press the **Wheel(OK)** button with the normal video screen on and draw a pattern toward the screen.




Previous channel: Moves back to the previous channel.




Recent list: Shows channels recently watched.



Shows channel lists which be related to pattern. Choose the channel.

 It may not work when certain windows are open.

## ☐ To change TV mode

**SMART**  ⇒ **Settings** → **OPTION** → **Mode Setting**

Selects Home Use or Store Demo.

For use in the home, select Home Use.

Store Demo is for store display.

## ☐ To use the ISM Method

**SMART** 🏠 ⇒ **Settings** → **OPTION** → **ISM Method**

This function removes image sticking which is caused by the prolonged display of static images.

- **Normal**: Minimizes image sticking by gradually lowering the brightness when displaying static images and by increasing the brightness when displaying moving images.
- **Orbiter**: Minimizes image sticking by moving the image on the screen left, right, up or down every 2 minutes.



- **Colour Wash**: Removes image sticking by moving every pixel in a certain pattern on the screen for a specific period of time. Please use this function to remove temporary image sticking.
- ✎ Image sticking is commonly known in plasma TV when it displays static images for a long time. **ISM Method** delays the image sticking effect; it does not completely prevent the phenomenon. Please use this function with caution.

## ❑ To return to initial settings


**SMART**  ⇒ **Settings** → **OPTION** → **Factory Reset**

Returns to initial default mode by deleting all user settings.


Once initialisation is completed, the TV will turn off and then back on.

-  If **Lock System** is turned on, a pop-up will be prompted to ask for password.
-  Do not turn off the power during initialisation.

## ❑ To use Home Screen

Press **SMART**  button on the remote control.

With all Smart TV features on one screen, everyone can access a wealth of content and applications conveniently via the quick and easy-to-use menu, arranged by themes such as Live TV, Card, My Apps, etc.

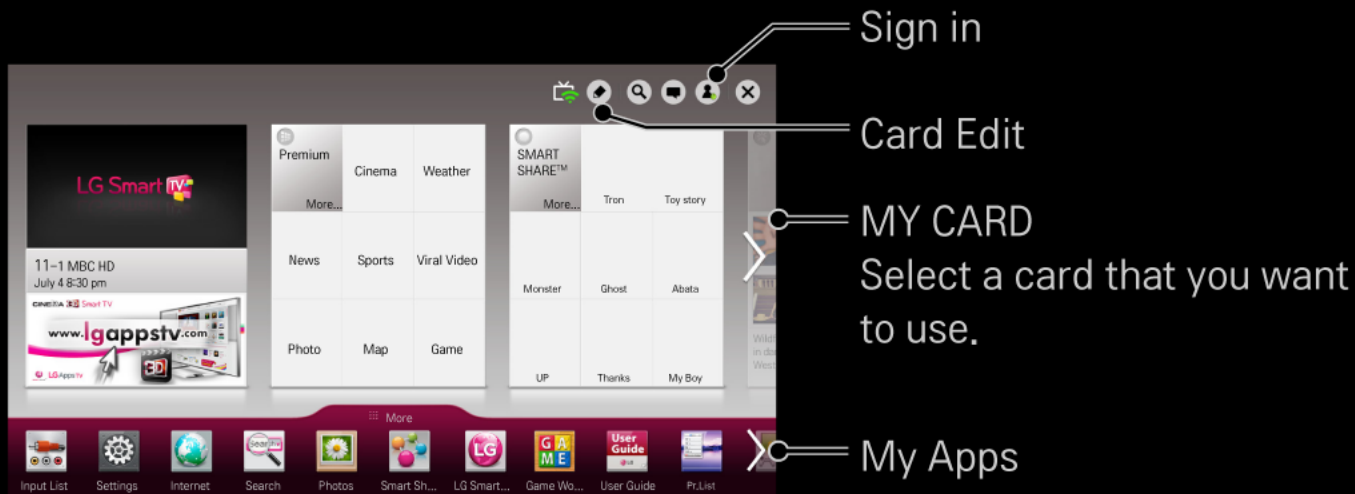

## ☐ To use and edit MY CARD

### SMART ⇒ MY CARD

To enable you to easily check and access a wide variety of content and functions, the main functions are grouped into categories and displayed on cards.

By selecting the card name, you can go to that category page.


Select **Edit** at the top of the home screen to switch the position of the cards or create your own card. (You cannot edit the **Live** and **Premium** cards.)

## ☐ To use My Apps

SMART  ⇒ More

Select **More** at the bottom of the home screen.

Select **More** to check apps pre-installed apps and apps you have downloaded.

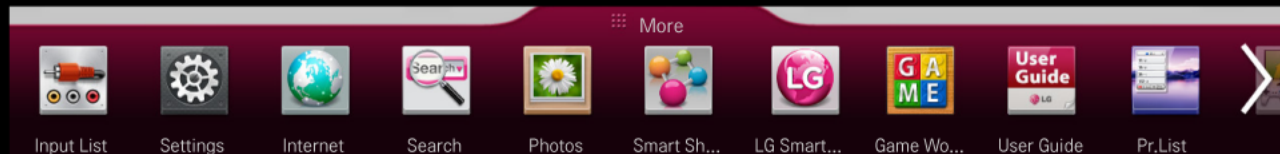

Select the app you want to run.




# ☐ To edit items in My Apps

SMART 🏠 ⇒ More → My Apps → Edit

On the My Apps page, select Edit at the top of the screen to move or delete apps. Please note that system apps can be moved, but cannot be deleted.

✎ Changes orders / deletes items by dragging the app icons if your device has a Magic Remote Control.

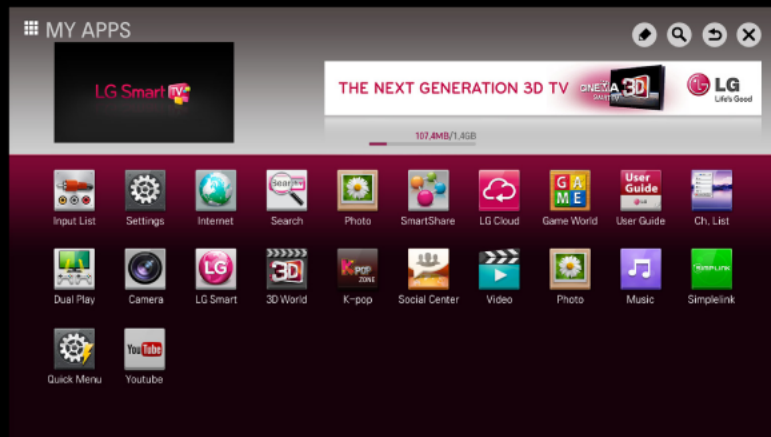


A wireless or wired network connection is required to use Smart features.

When connected to the network, you can use Premium content, LG Smart World, DLNA and more.

## ❑ One-click network connection

Connects easily to a wired/wireless network.

SMART  ⇒ Settings → NETWORK → Network Connection to connect to an available network automatically. Follow the prompts on the TV.

## ❑ To connect to a network through Set Expert

**SMART**  ⇒ **Settings** → **NETWORK** → **Network Connection**

For use in special circumstances such as in offices (in cases where a static IP is used).

- 1 Select a network connection, either *Wired* or *Wireless*.
- 2 When connecting via Wi-Fi, use the one of the following network connection methods.

AP List	Connects to the network selected from the AP List.
Enter the SSID	Connects to the wireless AP typed in.

WPS-PBC

Connects easily when the button of a wireless AP supporting PBC is pressed.

WPS-PIN

Connects easily when the PIN of the wireless AP that you wish to connect to is entered in to the AP website.

## ❑ To use the Wi-Fi direct function

**SMART**  ⇒ **Settings** → **NETWORK** → **Wi-Fi direct**

Wi-Fi Direct is a function that allows your TV to connect with a Wi-Fi Direct device without Internet connection. With SmartShare™, you can watch the files stored on a device connected via Wi-Fi Direct.

- 1 Set **Wi-Fi direct** to **On**. (If you do not use it, please change it to **Off**.)
- 2 Enable the Wi-Fi Direct settings on the device that you want to connect to.
- 3 A list of devices that can be connected to the TV is displayed.
- 4 Select a device to connect.
- 5 Select **Yes**, when the connection request message appears.
- 6 If the device that you want to connect accepts the request, **Wi-Fi direct** is connected.

## ❑ To use the Miracast™/Intel's WiDi function

**SMART**  ⇒ **Settings** → **NETWORK** → **Miracast™/Intel's WiDi**

You can view the screen of a device with Miracast™ and Intel's WiDi technologies on your TV.

- 1 Set Miracast™/Intel's WiDi to On. (If you do not use it, please change it to Off.)
- 2 Enable the Miracast™/Intel's WiDi settings on the device that you want to connect to.
- 3 A list of devices that can be connected to the TV is displayed.
- 4 Select a device to connect.
- 5 Select Yes, when the connection request message appears.
- 6 If the device that you want to connect accepts the request, Miracast™/Intel's WiDi is connected.

- ✎ Some models may provide the Intel's WiDi function only.
- ✎ When Wi-Fi Direct is set to Off, if you set Miracast™/Intel's WiDi to On, Wi-Fi Direct is automatically set to On.
- ✎ When you set the Miracast™ / Intel's WiDi function to Off, Wi-Fi Direct returns to the previous setting.
- ✎ It is recommended to connect a laptop using Intel's WiDi within close range.
- ✎ Though Intel's WiDi can be connected without a wireless router, it is recommended to connect the wireless router first for optimal performance.
- ✎ You may not connect your TV to a non-LG Electronics device even when it is detected.
- ✎ It is recommended you to connect a device to a 5GHz router.
- ✎ The response rate may vary depending on the user's environment.
- ✎ For more information on the device you want to connect to, refer to its owner's manual.

## ❑ Setting a network - warning

- ✎ Use a standard LAN cable (Cat5 or higher with RJ45 connector, 10 Base-T or 100 Base TX LAN port).
- ✎ Resetting your modem can cause network connection problems. To resolve the problem, turn the power off, disconnect and reconnect, and then turn the power back on.
- ✎ LG Electronics is not responsible for any network connection problems or any faults, malfunctions and errors caused by an network connection.
- ✎ A network connection may not work properly depending on the Internet service provider.



- ✎ A DSL modem is required for a DSL service; a cable modem is required for a cable service. Only a limited number of network connections may be available, and TV network setting may not be available depending on your contract with your Internet Service Provider (ISP). (If only one device is allowed per line and the PC is already connected, other devices cannot be used.)
- ✎ Wireless networks can be subject to interference from other devices operating at a frequency of 2.4 GHz (wireless phones, Bluetooth devices or microwave ovens). There may also be interference from devices with a frequency of 5 GHz, same as other Wi-Fi devices.
- ✎ The surrounding wireless environment can cause the wireless network service to run slowly.
- ✎ If you do not turn off the entire local home network, network traffic may occur on some devices.

- ✎ For an AP connection, an access point device that supports wireless connection is required and the wireless connection feature must be enabled on the device. Contact your service provider regarding availability of wireless connection on your access point.
- ✎ Check the SSID and security settings of the AP for AP connection. Refer to the appropriate documentation for SSID and security settings of the AP.
- ✎ Invalid settings on network devices (wired/wireless line sharer, hub) can cause the TV to run slowly or not operate properly. Install the devices correctly according to the appropriate manual and set the network.
- ✎ Connection method may differ according to the AP manufacturer.

## ❑ To connect a USB device

Connect a USB storage device (external HDD, USB memory) to the USB port of TV to enjoy the content files stored in the USB device on your TV.

To remove a USB storage device, select the **Quick Menu → USB Device** that you wish to remove; do not remove physically until you see the message that the USB has been removed. If detached early, an error may occur on the TV or the USB storage device.

- ✎ Once a USB device has been selected for removal, it can no longer be read. Remove the USB storage device and then re-connect it.

## ❑ Using a USB storage device - warning

- ✎ If the USB storage device has a built-in auto recognition program or uses its own driver, it may not work.
- ✎ Some USB storage devices may not work or may work incorrectly.
- ✎ If you use a USB extension cable, the USB device may not be recognized or may not work properly.
- ✎ Use only USB storage devices formatted with the Windows FAT32 or NTFS file system.
- ✎ For external USB HDDs, it is recommended that you use devices with a rated voltage of less than 5 V and a rated current of less than 500 mA.
- ✎ It is recommended to use a USB hub or hard disk drive with power supplied. (If the power supplied is not enough, the USB storage device may not be detected properly.)


- ✎ It is recommended that you use USB memory sticks of 32 GB or less and USB HDDs of 2 TB or less.
- ✎ If a USB HDD with power-saving function does not work properly, turn the power off and on. For more information, refer to the user manual of the USB HDD.
- ✎ Data in USB storage device can be damaged so be sure to back up important files to other devices. Data maintenance is the user's responsibility and the manufacturer is not responsible for data loss.

# ☐ To use SmartShare™

SMART 🏠 ⇒ SmartShare™

Provides photo / music / video files on your TV by connecting to a USB device or home network (DLNA).

🖋 Image shown may differ from your TV.

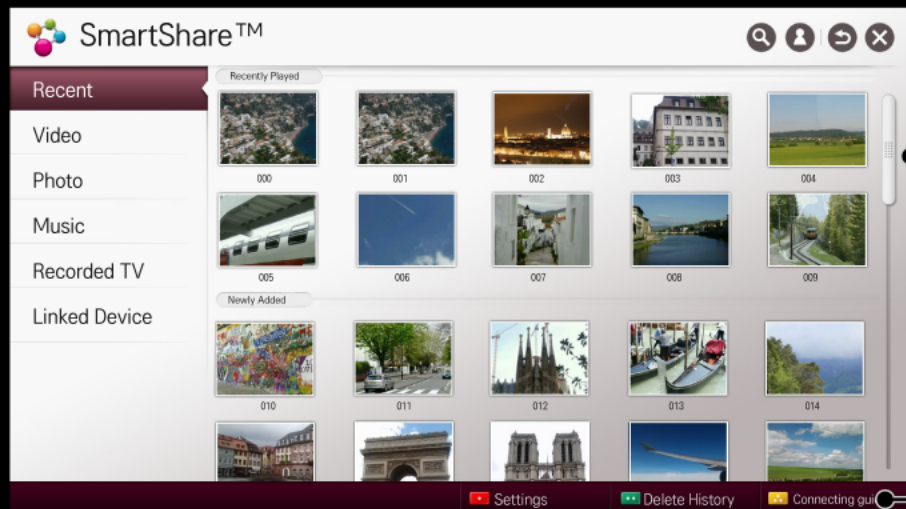


— Displays photo / music / video files on all devices connected to the TV.

— Shows how to connect PC, smartphone/device, and USB.

## ☐ To control video playback

Controls playback and sets options while viewing videos.


✎ Image shown may differ from your TV.

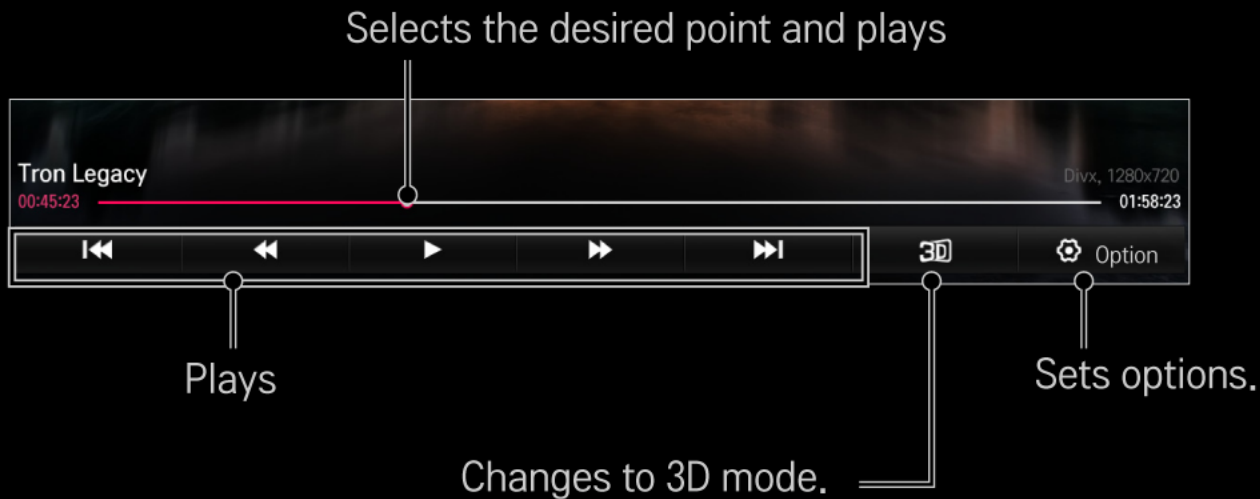

## ❑ To control photo view

Controls playback and sets options while viewing pictures in full screen.

- ✎ For 3D pictures, the **Slide Show Effect** does not work even when the **Slideshow** function is enabled.
- ✎ Image shown may differ from your TV.

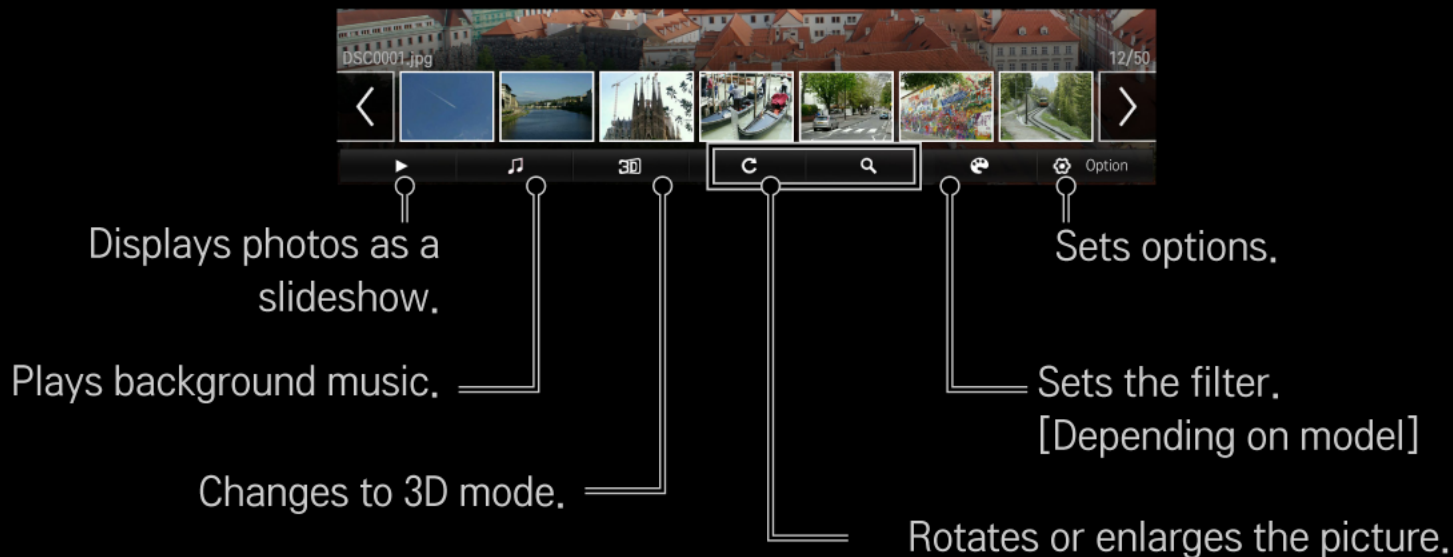



# ❑ To control music playback

Controls playback and sets options while playing music.

✎ Image shown may differ from your TV.



Plays

Sets the repeat/random function.

Selects the desired point and plays

Sets options

Listens to music with the monitor turned off.

- ✎ You can control playback using the ◀◀ , ▶ and ▶▶ keys on a standard remote control.
- ✎ If you use the USB device, time information will be not shown on screen.

## ❑ To set SmartShare™ related functions

SMART  ⇒ SmartShare™ → Settings

Changes settings related to SmartShare™ content playback.

### ❑ Advanced Setting

My TV Name	Changes the name that appears when searching for the TV from other devices.
Network Status	Checks the network connection.
Wi-Fi Direct	Allows use of wireless connection functions such as Wi-Fi direct and WiDi.
Auto Play on Receive	Accepts / rejects content transferred from other devices.

## DivX(R) VOD

Registers or releases DivX.

Checks DivX Registration Code for playing DivX-protected videos. Register at <http://vod.divx.com>.

Uses Registration Code to rent or purchase movies at [www.divx.com/vod](http://www.divx.com/vod).

- ✎ Rented/purchased DivX files cannot be played if the DivX Registration Code of a different device is used. Use only the DivX Registration Code granted to this device.
- ✎ Converted files not conforming to the DivX Codec Standard may not play or may produce abnormal images and sound.

## □ **Delete History**

To delete contents history, press **Delete History** button below. Use the contents at **Recent** menu.

## ❑ SmartShare™ supporting file

Maximum data transfer rate :

- Full HD : 20 Mbps (megabits per second)
- ULTRA HD [Depending on model] : 50 Mbps (megabits per second)

External subtitle formats supported :

- \*.smi, \*.srt, \*.sub (MicroDVD, SubViewer 1.0/2.0),
- \*.ass, \*.ssa, \*.txt (TMPlayer), \*.psb (PowerDivX), \*.dcs (DLP Cinema)

Internal subtitle formats supported :

XSUB (supports internal subtitles generated from DivX6)

## □ Video Supported Codec

Maximum:

- Full HD :1920 x 1080 @30p
- ULTRA HD [Depending on model] : 3840 x 2160 @ 30p

Extension	Codec	
.asf	Video	VC-1 Advanced Profile, VC-1 Simple and Main Profile
.wmv	Audio	WMA Standard, WMA 9 Professional
.divx	Video	DivX3.11, DivX4, DivX5, DivX6, XViD, H.264/AVC, Motion Jpeg, MPEG-4 Part 2
.avi	Audio	MPEG-1 Layer I, II, MPEG-1 Layer III (MP3), Dolby Digital, Dolby Digital Plus, LPCM, ADPCM, DTS

Extension	Codec	
.mp4 .m4v .mov	Video	H.264/AVC, MPEG-4 Part 2
	Audio	AAC, MPEG-1 Layer III (MP3)
.3gp .3g2	Video	H.264/AVC, MPEG-4 Part 2
	Audio	AAC, AMR-NB, AMR-WB
.mkv	Video	H.264/AVC
	Audio	HE-AAC, Dolby Digital
.ts	Video	H.264/AVC, MPEG-2, VC-1
.trp .tp .mts .m2ts	Audio	MPEG-1 Layer I, II, MPEG-1 Layer III (MP3) Dolby Digital, Dolby Digital Plus, AAC



Extension	Codec	
.vob	Video	MPEG-1, MPEG-2
	Audio	Dolby Digital, MPEG-1 Layer I, II, DVD-LPCM
.mpg	Video	MPEG-1, MPEG-2
.mpeg	Audio	MPEG-1 Layer I, II, MPEG-1 Layer III(MP3), AAC

## □ Available music file

File type	Item	Info
mp3	Bit rate	32 Kbps - 320 Kbps
	Sample freq.	16 kHz - 48 kHz
	Support	MPEG1, MPEG2, Layer2, Layer3

## □ Available photo file

File type	Item	Profile
2D (jpeg, jpg, jpe)	JPEG	Minimum: 64 x 64 Maximum: Normal Type: 15360 (W) x 8640 (H) Progressive Type: 1920 (W) x 1440 (H)
3D(jps)	JPS	Minimum: 64 x 64 Maximum: Normal Type: 15360 (W) x 8640 (H)
3D(mpo)	MPO	4:3 size                      3648 x 2736 2592 x 1944 2048 x 1536 3:2 size                        3648 x 2432

## ❑ Playing video - warning




- ✎ Some subtitles created by users may not work properly.
- ✎ The video and subtitle files should be placed in the same folder. For subtitles to display correctly, the video and subtitle files must have the same name.
- ✎ Subtitles on an NAS (Network Attached Storage) device may not be supported depending on the manufacturer and model.
- ✎ We do not support any stream that contains GMC (Global Motion Compensation) or Qpel (Quarterpel Motion Estimation).
- ✎ Only H.264 / AVC profile level 4.1 and lower is supported.
- ✎ The file size limit is dependent on the encoding environment.
- ✎ It works only the above version of Window Media Audio V2.
- ✎ It's not supported AAC Main Profile.

- ✎ Video files created by some encoders may not be played back.
- ✎ Video files in formats other than the ones specified here may not be played back.
- ✎ Playback of video files stored on the USB device that do not support High Speed, may not work properly.
- ✎ The TV supports DTS audio codec when the USB/HDMI video file playback.

## ❑ What is LG Cloud?

### SMART ⇒ LG Cloud

LG Cloud is a service that allows you to enjoy your contents, such as video, music and photos on your LG Smart TV, SmartPhone and LG Website at any time, regardless of where you are.

-  Sign up for LG Cloud to use the services.
-  You can sign up from your LG Smart TV, SmartPhone or LG Website.
-  The service or membership can only be cancelled at the LG Cloud website (<http://www.lgecloud.com>).


# ❑ To use LG Cloud

## ❑ Main screen layout

This is the main screen you will see first after signing in.



## □ Video playback

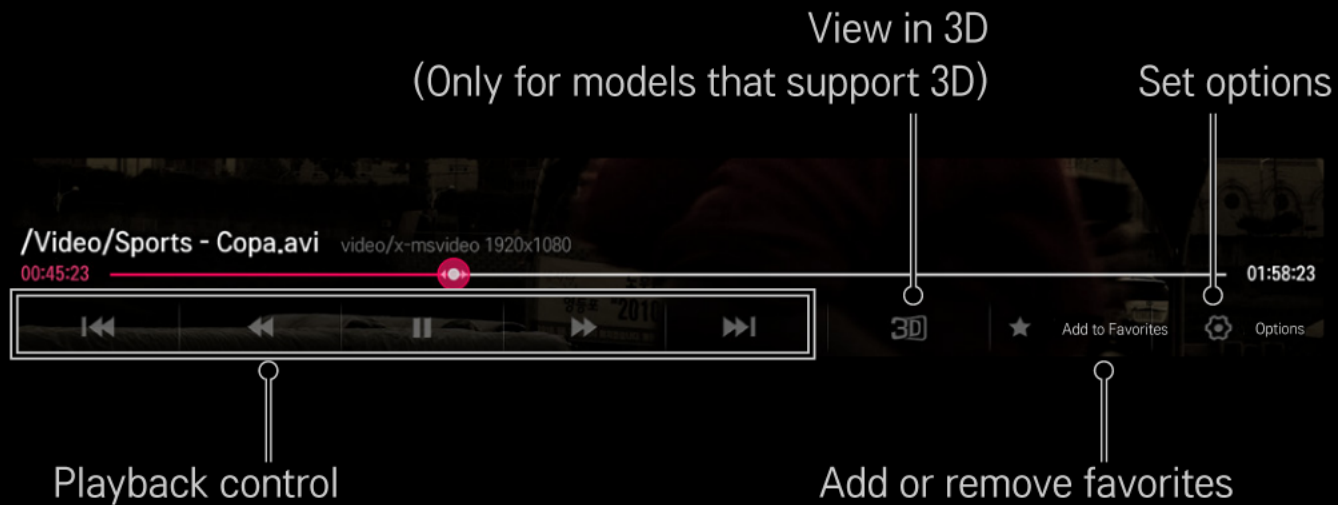



## □ LG Cloud Notice/My Account/Get Started/Settings

Notice	Shows notices about the LG Cloud service.
My Account	Shows the user ID and e-mail address.
Get Started	Introduces the LG Cloud service.
Settings	<p>You can set the <b>Language</b> for LG Cloud and <b>Auto Sign-in</b>.</p> <ul style="list-style-type: none"><li>• <b>Language</b>: Sets the language for LG Cloud.</li><li>• <b>Auto Sign-in</b>: Sets the Auto Sign-in option for LG Cloud to On/Off.</li></ul>

DLNA stands for Digital Living Network Alliance, which allows you to enjoy video / music / photo files stored on a PC or server on your TV via home networking.

## ❑ To connect a DLNA–authenticated Smartphone

The TV and the smartphone should be on the same network.

- 1 Ensure that Wi-Fi is enabled on the smartphone.
- 2 Install / run the app to share content on the smartphone.
- 3 Run “Share my mobile phone Content”.
- 4 Select the kind of content (video / music / photo) you wish to play.
- 5 Select the video, music or photo file to play on the TV.
- 6 Select Add to Play List.
- 7 Select TV model name on the device you want to play content from.  
(TV model name is on the label of the device.)
- 8 Play ► Shows the selected file on TV.


## ❑ To connect DLNA DMR (Digital Media Renderer)

If the PC's operating system is Windows 7 or Windows 8 or the DLNA-certified device (e.g. mobile phone) is connected via a network, you can play music / videos / photos on TV without installing a separate program.

- 1 Configure TV and PC on the same network. Configure Windows 7 or Windows 8-installed PC on the network.
- 2 Right-click the music / video / photo file that you want to play and use the “Remote Playback” feature that comes with Windows 7 or Windows 8. To play content from a device such as a mobile phone, refer to the user guide for the device.
- 3 Content will be played on one device only even if more than one TV or device is connected. Play speed can vary depending on network speed.

## ❑ To connect DLNA DMP (Digital Media Player)

With a PC having SmartShare PC Software, music / video / photo files may be replayed on the TV by linking them via home networking.

- 1 Configure TV and PC on the same network. The TV and each device should be connected through a single access point to enable DLNA service.
  - 2 Install SmartShare PC Software on the PC from the website. Before installation, close all running programs including firewall and anti-virus programs.
  - 3 The sever should be running in order to watch the shared file on your TV.
- ✎ For the website information, go to SMART  ⇒ Settings → SUPPORT → Product/Service Info.
  - ✎ For how to use the SmartShare PC software, refer to the software help.

## □ In case of a DLNA malfunction

- ✎ If the DLNA feature does not work properly, check your network settings.
- ✎ A 5-GHz access point is needed to view 1080p videos via DLNA. A 2.4-GHz access point may cause frequent buffering or other problems.
- ✎ DLNA may not work properly in the wireless network. It is recommended to connect to the wired network.
- ✎ When playing video in DLNA mode, Multi Audio and internal subtitles are not supported.
- ✎ If more than one TV is connected to a single server in DLNA mode, the content may not play depending on server performance.
- ✎ Subtitles may not be supported depending on the DLNA device.
- ✎ DLNA feature may not work properly depending on the network environment.

- ✎ DLNA feature cannot be used with some access points that do not support multicasting. For more information, refer to the access point manual or consult the manufacturer.
- ✎ Supported file types may differ depending on DLNA server environment, even for file types supported by the TV.
- ✎ Too many sub-folders and files in one folder may cause malfunction.
- ✎ The information about the file from the DLNA server may not be displayed correctly.
- ✎ When viewing video subtitles on a DLNA server, we recommend that you use SmartShare PC Software.
- ✎ If subtitle file is added later, turn off the shared folder and reset.
- ✎ DRM file located on a SmartShare PC Software server cannot be played.

# ❑ To use Premium

## SMART ⇒ Premium

This service gives you easy access to a wide variety of content, such as video, news and, UCC, at any time, as long as you are connected to the network. Premium content includes specialized country-specific services taking regional cultural sensitivities into account as well as global content.

Premium content  
Select Content that  
you want to use.



Sign in

Search

Add to My Apps

Sets options

## ❑ To use paid content

A fee is payable for some Premium content. Fee-paying services are paid for either through LG Electronics' proprietary billing system or through that of the relevant content provider.

Before using the LG billing system, you will need to sign up for membership and register payment information on TV or the website ([www.lgappstv.com](http://www.lgappstv.com)) to purchase paid content.

You can sign up for membership on the login screen on your TV or our website. You can then log into both the TV and the website with one ID.



- 1 Click **Sign In** button on the upper-right side of the screen on the Home page to sign in.
- 2 Moves to the desired Premium service.  
(For some premium services, separate sign-in is required after signing up for the premium service.)
- 3 After reviewing the pricing and service information for the content, click the **Purchase** button. (There may be limitations on the available period and number of times depending on content.)
- 4 Once the purchasing process is complete, view your purchased content by clicking the **Buy** button.
- 5 Select your ID on upper menu of Home screen and check history of purchases from **My Page** → **Payment inquiry**. It is also available on My Page → **Purchase History** of web site ([www.lgappstv.com](http://www.lgappstv.com)).

## ❑ To reset Premium

**SMART  ⇒ Premium → Option → Initialisation of Premium**

Resets Premium list, Premium information, country setting and user sign-in information. Resetting will resolve errors occurring during Premium update.

- ✎ Content offered by service providers are subject to change or deletion without prior notice to enhance their service quality. Refer to the website of the relevant content provider for questions, troubleshooting or the latest information about content. LG Electronics assumes no legal responsibility for content services and related information, even when a service is discontinued by the service provider.
- ✎ The quality of your Premium service may be affected by your Internet connection. For any questions related to Internet speed or other service problems, consult your Internet service provider.
- ✎ For best service quality, we recommend that you subscribe to an Internet service providing a speed of 4.0 Mbps (1.5 Mbps or faster). If you experience any Internet speed problem, contact your Internet service provider.
- ✎ Some content providers may provide content that is unsuitable for minors. Parental discretion is advised.

# ☐ To use LG Smart World

[This function may not be applied some countries.]

## SMART ⇒ LG Smart World

LG Smart World is a TV application service available through Smart TV Service. You can download and enjoy various kinds of hot paid/free apps including education, entertainment, life and news.



Sign in.

When you sign in, ID is displayed.




When you select the ID, you can select My Page and Sign Out.

Select the app to install.

# ❑ To sign up with LG Smart World

## SMART ⇒ Sign In

Sign up is required to download and run apps.

- 1 Select **Sign Up** and agree to Legal Notice.
  - 2 Enter ID and password.
  - 3 In Confirm Password box, enter password again.
  - 4 Select **OK** to complete sign-up process.
-  You can sign up for membership on either your TV or the website ([www.lgappstv.com](http://www.lgappstv.com)).
  -  After signing up for membership, log into your TV and our website with the same ID.
  -  You can sign in to up to five TVs with a single ID.

## ❑ To install an app on your TV

### SMART ⇒ LG Smart World

- 1 Click the **Sign In** button at the top of the home screen to log in.
- 2 Select the **LG Smart World** card.
- 3 Select an app you want from the list.
- 4 Check the details of the app, then select the **Install** or **Buy** button.
- 5 Check that you have the functions or TV accessories required to install the app, then select the **OK** button.
- 6 For paid apps, payment and purchase authentication is required.
- 7 Select **Run** once installation is complete to run the app immediately. If you do not want to run immediately, select **Close**. If you want to run the app later, select **My Apps** to check the list of apps installed on TV.

- ✎ You can purchase apps via PC or TV, but you must use the TV to install and run them.
- ✎ If you have insufficient storage space on your TV, you can download apps to a USB storage device connected through the TV's terminal for USB apps. Apps stored on USB can be run / deleted / moved from the **My Apps** screen.
- ✎ A USB Memory Stick containing apps cannot be used for other data. (For USB Apps Only)

## ☐ To manage my information

### SMART ⇒ LG Smart World


- 1 Sign in.
- 2 Select the currently signed-in ID at the top of the screen.
- 3 Select My Page.
- 4 Manages by examining Member Information, My Purchased Apps List and TV Installed Apps List.



My Information	Shows basic information about the ID currently signed in. To change your member information, visit <a href="http://www.lgappstv.com">www.lgappstv.com</a> on your PC.
Payment Inquiry	Shows Payment History of the signed-in ID.
Purchased Apps	Shows My Purchased Apps List for the signed-in ID. You can delete/re-install the purchased apps.

# SMART ⇒ Search

You can search apps and contents using the Search function of LG Smart TV. When you enter keywords using the input device, such as the remote control, you can find apps of LG Smart World and some contents of the Premium service. Links are also provided to go for web search. If you are using SmartShare™, you can also search contents of SmartShare™. The Search categories and content types vary depending on the country and will be kept updating.

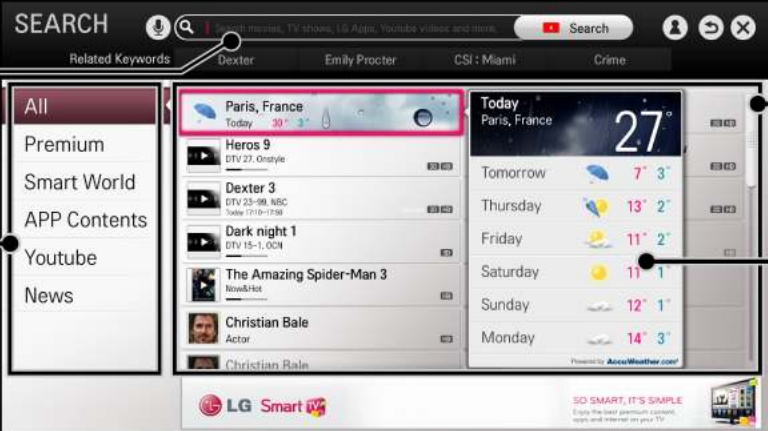

The screenshot shows the LG Smart TV Search interface. At the top, there is a search bar with a microphone icon and a search button. Below the search bar, there are related keywords: Dexter, Emily Procter, CSI: Miami, and Crime. The main content area is divided into three sections: a left sidebar with search categories, a central list of search results, and a right sidebar with detailed information about the selected item.



Annotations:

- Enter search terms. (points to the search bar)
- Category of search results (points to the left sidebar)
- Search results (points to the central list of results)
- Detailed information about the search item (points to the right sidebar)



Category	Item	Time	Temp
All	Paris, France	Today	20° 3°
	Heros 9	DTV 27, OnStyle	
	Dexter 3	DTV 23-26, NBC	
	Dark night 1	DTV 15-1, OCN	
	The Amazing Spider-Man 3	News&Hot	
	Christian Bale	Actor	
	Christian Bale	Actor	
Premium			
Smart World			
APP Contents			
Youtube			
News			
Today	Paris, France		27°
Tomorrow			7° 3°
Thursday			13° 2°
Friday			11° 2°
Saturday			11° 1°
Sunday			12° 1°
Monday			14° 3°

## ❑ To use the voice recognition function



### ❑ Using this function through search

- 1 Go to **SMART**  ⇒ **Search**. Select the voice recognition icon () on the left of the text field.
- 2 Speak slowly and clearly after the voice recognition window appears.
- 3 After the voice recognition is completed, the Similar List window pops up. If the pop-up window does not have the results you want, press **Retry** to try again. Select the most similar result, then it will be displayed in the text field. Press the Search button to get the result you want.


## □ Using this function on the Internet




- 1 Go to **SMART**  ⇒ Internet. Move the Magic Remote Control pointer in the text field on a website to open the virtual keyboard.
- 2 Select the voice recognition icon () on the left of the text field on the virtual keyboard.
- 3 Speak slowly and clearly after the voice recognition window appears.
- 4 After the voice recognition is completed, the Similar List window pops up. If the pop-up window does not have the results you want, press **Retry** to try again. Select the most similar result, then it will be displayed on the text field. Press the Search button on the website to get the result you want.

## □ Using this function on the Social Center

- 1 Go to **SMART**  ⇒ Social Center.
- 2 Log in with your LG Smart TV ([www.lgappstv.com](http://www.lgappstv.com)) ID.
- 3 Select the social network site you want and log in with your site ID.
- 4 Select the voice recognition icon () on the left of the text field.
- 5 Speak slowly and clearly after the voice recognition window appears.
- 6 If your voice is recognised, press the **Share** button on the right to input the text in the social network service.

If it is not recognised, try again or you can edit the recognised text by opening the virtual keyboard with the Magic Remote Control pointer.

-  While the recognised result is in the text field, if you retry the voice recognition function, the previous result will be replaced with the new one.

- ✎ You can use Voice Search when you press the **Voice recognition**() on the Magic remote control even if QWERTY keyboard is shown on your screen.
- ✎ Check the network connection before using the voice recognition function.
- ✎ It is recommended to use the remote control no further than 10 cm from your face.
- ✎ The voice recognition may fail if you speak too fast or too slowly.
- ✎ The recognition rate may vary depending on the user's characteristics (voice, pronunciation, intonation, and speed) and the environment (noise and TV volume).
- ✎ To change the voice recognition language, go to **SMART**  ⇒ Settings → **OPTION** → Language(Language) → Voice Recognition Language.
- ✎ You can set Avatar to On/Off in **SMART**  ⇒ Settings → **OPTION** → See Avatar.

[This function may not be available on some models.]


# SMART ⇒ Internet

Types URL manually on TV or visits websites added to Favourite.

Types in the web address.

Add the current page to favorites.

Chooses when you  
open several web  
browsers.

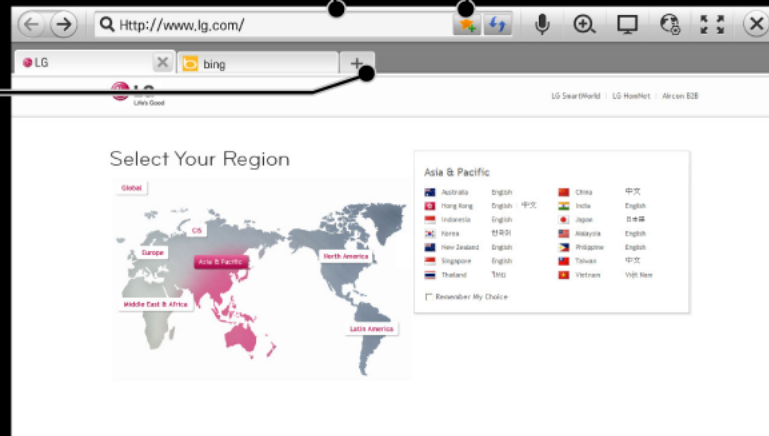


- ✎ Internet supports up to Flash 11 but does not support platform-dependent technology like ActiveX.
- ✎ Internet only works with a pre-installed plug-in.
- ✎ Internet may not play any media file format other than the following:  
JPEG / PNG / GIF
- ✎ Internet will be forcibly closed when there is insufficient memory.
- ✎ For the Internet, fonts installed on the TV are used and may not be displayed normally depending on the content played.
- ✎ Internet does not support file and font download.
- ✎ Internet is made for TV so it may have a different function to browsers made for PC.
- ✎ Internet is a TV browser and may not work properly when playing some content files.



## SMART ⇒ Social Center

LG Smart TV provides the Social Center app that allows you to communicate via SNS such as Facebook and Twitter while watching TV.

Using Social Center, you can communicate with friends while watching TV and view comments and pictures posted by your social networking friends at a glance.

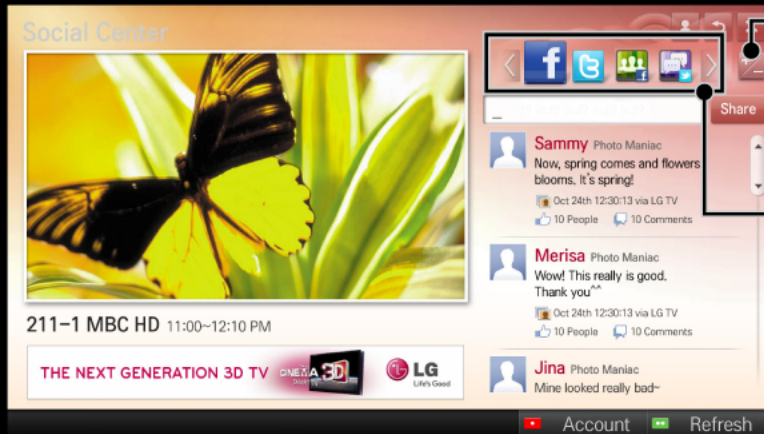

You can edit the Social Center tap.

Select a tap such as Facebook / Twitter / Activity / Talk to communicate via social network services (SNS).

- 1 You can sign in with your LG TV account. If you are not a member yet, please sign up first.
- 2 Select a tap from Facebook, Twitter, Activity or Talk. Some functions are connected with other SNS, so you may need the SNS account to sign into the service.
- 3 Now, you can look for various content and post comments while watching TV.


Social Center allows you to write comments while using LG Smart TV services connected with Facebook or Twitter and to view the comments on the Web or mobile device.

Facebook / Twitter	You can communicate via SNS such as Facebook and Twitter while watching TV.
Activity	With your Facebook account, you can easily see LG Smart TV's great content recommended by other users. Click a recommended program/show to move to the corresponding 3D World, K-pop, or LG app.
Talk	You can see what other twitter users think about the shows currently on.
Connected with smartphone	The functions of Social Center, such as Activity and Talk are connected with the LG TV Remote app on the smartphone to help control of content and make your TV viewing experience better.

- ✎ You can easily type using the LG TV Remote app on your smartphone when Communicating via SNS. The app can be downloaded at the Google Play, App Store.
- ✎ The functions of Social Center are subject to change according to TV software update.



## ❑ To start a video call (Skype)

You can make a video call to a Skype contact connected using the Smart TV camera.

- 1 Connect the TV to a network.
- 2 Prepare the Smart TV camera for use. If your Smart TV is not equipped with a camera, install an LG video call camera (Sold separately). (For more information, please refer to the installation manual or owner's manual of the camera.)
- 3 Go to **SMART**  ⇒ Premium → Skype.
- 4 First, sign in to your Skype account.  
If you do not have a Skype account, create a Skype account by referring to the next page.


## ❑ To create a Skype account

To make a video call using Skype, you need a Skype account.

- 1 Go to SMART  => Premium → Skype and select Create account at the bottom.
  - 2 Read the terms and conditions and select Agree.
  - 3 Enter your Full name, Skype Name, and Password. To confirm the Password, enter the password again in the Repeat password field, and select Continue.
  - 4 Enter the E-mail, set the Country, and select Confirm.
-  If the Skype Name you entered is already in use, you need to provide another one.

## ☐ To use Skype

When you sign in to Skype, you can use the call service of Skype.

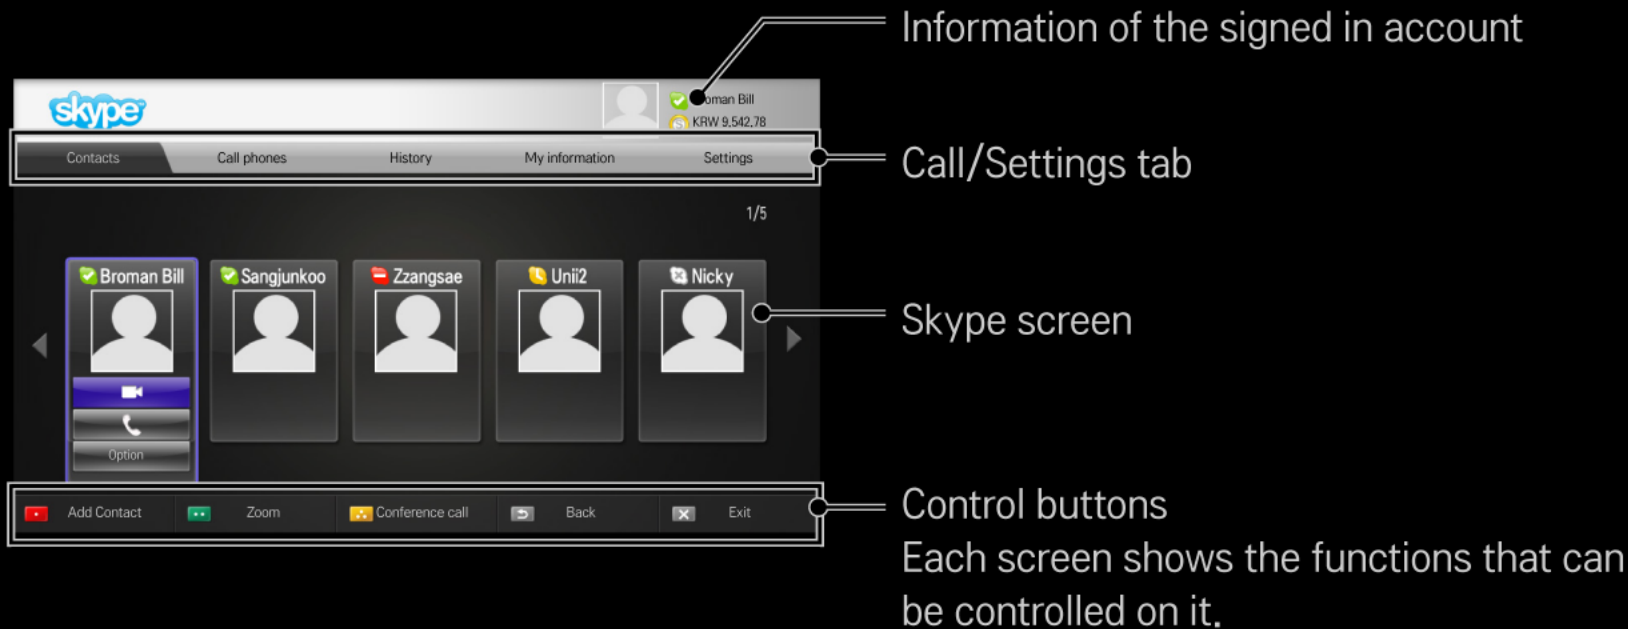





The image shows the Skype desktop application interface with several call service features highlighted by callouts:

- Information of the signed in account:** Points to the user profile area in the top right corner, showing the name "Broman Bill" and a balance of "KRW 9,542.78".
- Call/Settings tab:** Points to the "Settings" tab in the top navigation bar, which also includes "Contacts", "Call phones", "History", and "My information".
- Skype screen:** Points to the main contact list area, which displays five contact cards: "Broman Bill", "Sangjunkoo", "Zzangsae", "Unii2", and "Nicky". The "Broman Bill" card is expanded to show call options like "Option" and "Call".
- Control buttons:** Points to the bottom navigation bar, which includes buttons for "Add Contact", "Zoom", "Conference call", "Back", and "Exit".

Each screen shows the functions that can be controlled on it.


## □ Call/Settings tab

Contacts	<p>When you select a Skype contact, you can make  (Video Call) or  (Voice Call).</p> <p>You can add or delete a new contact.</p> <p> If there are more than 500 contacts, the list's performance and stability may be affected.</p>
Call phones	<p>You can make a call by pressing dial numbers.</p> <p> To use the <b>Call phones</b> function, you must purchase Skype credit. For more details, visit the website of Skype (<a href="http://www.skype.com">www.skype.com</a>).</p>
History	<p>You can check <b>All calls</b> sent or received and <b>Voice message/Contact requests</b> received.</p>




## My information

Once you have signed in, you can set [My status](#), [Change picture](#), [My profile](#), or [View account](#).

 The maximum number of photos that can be saved using snapshot is limited.


## Settings

Once you have signed in, you can set [Notification settings](#), [Call forwarding](#), [Privacy settings](#), [Video settings](#), or [Change password](#).


 It takes several minutes until the changes become effective.


## ❑ To make a voice call

### ❑ To make a video call

In **Contacts**, select a contact you want to call and select  (Video Call).

### ❑ To make a voice call

In **Contacts**, select a contact you want to call and select  (Voice Call).

 You can perform call-related functions such as adding a contact during a call.

## ❑ To answer a call

When a call is received while watching TV, a message appears at the bottom right of the screen.

You can answer a *video call/voice call* or Decline it.

- ✎ You cannot use input devices such as keyboard while using Skype.
- ✎ Video calls cannot be made to a Mac with Skype 2.8 or earlier.
- ✎ Available content is subject to change by the content provider. For more information on the content service, please visit the website of your content provider.
- ✎ The software update screen will automatically appear when an update is available.




### **No emergency calls**

Skype is not a replacement for your ordinary telephone and cannot be used for emergency calling.




Sign-up is required to use LG Smart World.

Free apps are available immediately after signing up, but you should register your payment method in order to use paid apps.

You can sign up and register payment methods on the TV or on our website ([www.lgappstv.com](http://www.lgappstv.com)).

Problem	Solution
When entering menu, the "Initialising" message always appears.	<ul style="list-style-type: none"><li>• The “Initialising” message appears while the microprocessor and hardware are rebooted, network communications are set up, and communication with SDP (device authentication and basic information download) is established. This takes about 20 seconds and is a normal process.</li></ul>
There is no content shown on the Premium card.	<ul style="list-style-type: none"><li>• Content may not be shown if you change the country setting on Smart TV. Change country in SMART  ⇒ Settings → OPTION → Service Country Setting.</li></ul>


Problem	Solution
While using internet features, some websites contain empty spaces.	<ul style="list-style-type: none"><li>• The TV's internet supports up to Flash 11 and only plays files in the following formats : JPEG, PNG, GIF</li></ul>
Internet closes automatically when visiting a website.	<ul style="list-style-type: none"><li>• The internet may be forced to close if memory is insufficient for the volume of information on a web page.</li></ul>
I have already signed up on the TV. Do I need to sign up again on the website (www.lgappstv.com)?	<ul style="list-style-type: none"><li>• If you sign up on your TV, no additional sign-up on the LG website (www.lgappstv.com) is required. After signing up on TV, you can sign into the website by using the same ID and password and entering the additional information to complete the email verification process.</li></ul>

Problem	Solution
Can each family member use a different ID on a single TV?	<ul style="list-style-type: none"><li>• You can register and use more than one ID on one TV.</li><li>• You can view the IDs registered on the TV in SMART  ⇒ Sign in → ID List.</li><li>• You can check the list of apps purchased by each ID. However, you can see all apps installed by each ID in SMART  ⇒ Sign in → My Page.</li></ul>
What should I do if I forget my ID?	<ul style="list-style-type: none"><li>• If you signed up via a PC, use the "Forgot ID?" feature on the website (www.lgappstv.com).</li><li>• If you signed up on the TV, IDs can be viewed in SMART  ⇒ Sign in → Find ID.</li></ul>

Problem	Solution
I purchased an app from the website (www.lgappstv.com). How can I use it on the TV?	<ul style="list-style-type: none"><li>• If you want to check an app you purchased on the TV, sign in and view it on the Purchased Apps menu. Select the ID at the top of Home and check the app in <b>My Page</b> → <b>Purchased Apps</b>.</li></ul>
Can I see my purchased apps history?	<ul style="list-style-type: none"><li>• Select the ID at the top of Home and check the app in <b>My Page</b> → <b>Purchased Apps</b>.</li><li>• Sign in to the website (www.lgappstv.com) and select <b>My Page</b> → <b>Purchase History</b>.</li></ul>



Problem	Solution
I deleted a paid app - do I have to purchase it again to download it?	<ul style="list-style-type: none"><li>• If a purchased app is accidentally deleted, you can download and reinstall it without having to buy it again, as long as it is still in service.</li></ul> Select the ID at the top of Home and re-download apps in <b>My Page → Purchased Apps</b> . (Previously owned apps may not be re-downloaded or run depending on the software version.)
Can I use apps from LG Smart TV's LG Smart World on both TV and PC?	<ul style="list-style-type: none"><li>• Check if the TV model supports LG Smart World.</li><li>• Apps from LG Smart TV's LG Smart World can only be run on LG Smart TV.</li><li>• Also, you can purchase apps from the website (<a href="http://www.lgappstv.com">www.lgappstv.com</a>) but cannot use them on PC or Mac so be careful when purchasing them.</li></ul>

Problem	Solution
How can I find out which ID is currently signed in to the TV?	<ul style="list-style-type: none"><li>• Select the ID at the top of Home and check the currently signed-in ID in <a href="#">My Page</a> → <a href="#">My Information</a>.</li></ul>
I installed an app on my TV. Where can I see the installed app?	<ul style="list-style-type: none"><li>• Select <a href="#">SMART</a>  ⇒ <a href="#">My Apps</a>. All paid and free apps installed on the TV are displayed.</li></ul>
The app size shown on screen differs from the actual app size installed on the TV.	<ul style="list-style-type: none"><li>• The app size shown on screen includes the additional space needed for installing apps and may differ from the app size as actually installed.</li></ul>

Problem	Solution
<p>I forgot my TV password. What should I do?</p>	<ul style="list-style-type: none"><li>• If you only provide the ID and password when signing up on your TV, you cannot recover your password when it is lost. Create a new ID and sign up with the ID.</li><li>• If you provide other information than the ID and password when signing up on your TV or the LG website (<a href="http://www.lgappstv.com">www.lgappstv.com</a>), you can recover your password on the website.</li></ul>

Problem	Solution
Do I have to save the payment information to purchase paid apps?	<ul style="list-style-type: none"><li>• To purchase paid apps, you should have a credit card registered on TV or the website (<a href="http://www.lgappstv.com">www.lgappstv.com</a>) or have credit. If you do not want your credit card details to be saved, charge credit in advance. Charging credit is only available on our website, and you cannot purchase paid apps if your credit card details are not registered or you don't have enough credit.</li></ul>
Can I return an app that I have purchased?	<ul style="list-style-type: none"><li>• As a member, you may not request a refund if you change your mind after purchase.</li><li>• If there is a defect in the product or a problem of using the product, which does not caused by your fault, you can ask for a refund. However, the valid reason for refund must be provided.</li></ul>

Problem	Solution
<p>I signed up on my TV, but I cannot purchase paid apps.</p>	<ul style="list-style-type: none"><li>• To purchase paid apps, you need to have a credit card registered with the website (<a href="http://www.lgappstv.com">www.lgappstv.com</a>). Also, you can have your credit ready by charging it on the website to purchase them.</li><li>• You cannot purchase paid apps if your credit card details are not registered with us or you don't have enough credit.</li></ul>
<p>Should I only use an email address for my ID?</p>	<ul style="list-style-type: none"><li>• For new sign-up members, the ID format has changed from a combination of numbers and alphabets to the email address.</li><li>• You can only use the email address for your ID when signing up.</li></ul>

Problem	Solution
Do I need to change my ID format to the email address?	<ul style="list-style-type: none"><li>• For new sign-up members, the ID format has changed from a combination of numbers and alphabets to the email address.</li><li>• If you are already a member, you can still use your existing ID or change it to the email address.</li></ul>
What is the LG account?	<ul style="list-style-type: none"><li>• The LG account allows you to sign into all of the LG Smart service with a single ID and password. You can use the following services with your LG account: LG Smart TV, LG Cloud, LG Smart World (excluding some countries), LG Smart ThinQ and LG Smart air conditioning, etc.</li><li>• Additional information may be required depending on the service.</li></ul>


## ❑ To set the service country

**SMART**  ⇒ **Settings** → **OPTION** → **Service Country Setting**

You can change the country setting of your Smart TV.

The Premium service and LG Smart World that are available for the country you selected will be provided.

<b>Auto Setting</b>	A service country is automatically set for your Smart TV.
<b>Manual Setting</b>	A service country can be set manually for your Smart TV.

 If a network is disconnected while setting the service country, it may not be set properly.

## ❑ To use Screen Remote


Press the **123** button on the Magic Remote Control.

Select a button on the Screen Remote displayed on the screen using the Magic Remote Control.



## □ To use Screen Remote

- ✎ The type of buttons on the Screen Remote varies depending on the region or the type of a connected device.
- ✎ Image shown may differ from your TV.

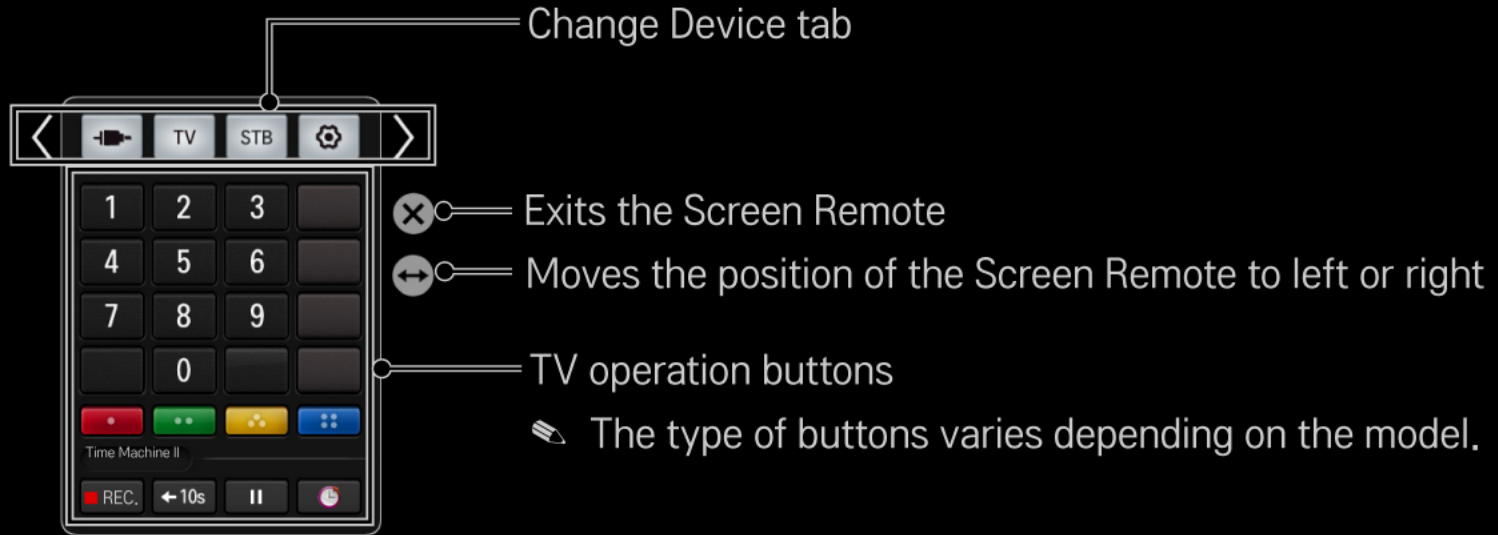

## ❑ To control a device connected to the TV using the Screen Remote

You can control a device connected via SimpLink or MHL using the Screen Remote.



- 1 Check if the device is connected to the TV.
  - 2 After pressing the **123** button on the Magic Remote Control, select the device you want to control in the Change Device tab. The Screen Remote that can control the device appears.
- ✎ This may not work with the **123** button for some models.
  - ✎ For more information about SimpLink or MHL connection, please refer to the connection section of "Owner's Manual" provided with the TV.

## ❑ To use the Universal Control function



[For Magic Remote Control only]



[This function may not be applied some countries.]

With the Magic Remote Control, you can control a set-top box, Blu-ray player, home theatre system, etc.

- 1 Check if a device you want to set is connected to your TV.
- 2 After pressing the **123** button on the Magic Remote Control, select the icon of a device you want in the Change Device tab.  
If there is no device you want, press the  on the tab, and select the external device you want. Once the setup is complete, the name of the selected device is displayed in the Change Device tab.
- 3 When you select a device you want in the Change Device tab, the Screen Remote that can control the device appears on the screen.  
To see more control buttons, select  at the bottom of the Screen Remote.

## □ To change or clear the Universal Control settings


- 1 After pressing the **123** button on the Magic Remote Control, select the  (TV/input selection) button.
  - 2 Select **Change Setting** or **Cancel Setting** at the bottom of the device to be changed.
-  When **Change Setting**, check if the power of the device to be changed is turned on.

- ✎ You can set one device per type.
- ✎ With the Screen Remote, you can only control the devices of a brand or manufacturer that you can select in the setup screen.
- ✎ If you connect to a network before setting the universal remote control, update for the latest manufacturer list is available.
- ✎ Some buttons may not work depending on the external device model.
- ✎ Place the device near the TV for seamless operation.
- ✎ If the device is in a drawer, open the drawer.
- ✎ Go to **SMART**  ⇒ Universal Control or **SMART**  ⇒ INPUT LIST → Set the Universal Control and add, delete, or change a device


## ❑ To view 3D images

3D imaging is a technology that utilizes the slight difference in the left and right eyes to make images on TV look just like real-life 3-dimensional space.

- 1 Play a 3D image title or turn to a 3D programme.
- 2 Press **3D** button to change to 3D imaging.
- 3 Turn on the 3D glasses and put it on.
- 4 To end 3D image viewing, press the **3D** button on the remote control while viewing 3D images.

 Depending on the input signal, available 3D type may differ.

## ❑ To adjust details of 3D images

SMART  ⇒ Settings → PICTURE → 3D Settings

Adjusts various aspects of 3D imaging.

3D Mode	Provides appropriate 3D depth. <ul style="list-style-type: none"><li>• 3D Depth : Adjust 3D depth between object and background.</li><li>• 3D Viewpoint : Adjust 3D image closer/farther from user.</li></ul>
3D Sound Zooming	Provides the 3D-optimised sound.
3D Pattern Recognition	Converts to 3D screen automatically by analysing the pattern of the original screen.

Normal Image View	The 3D effect is removed leaving a 2D image.
3D Image Correction	Switches left/right images of 3D video.
3D Wizard	[Depending on model] Optimizes 3D mode with 3D Wizard menu.



## ❑ Viewing 3D images – warning

- ✎ When viewing 3D images, it is recommended that the viewer maintain a distance of at least twice the screen's diagonal length.
- ✎ If a future 3D broadcasting format that is not supported by this TV becomes the standard, you may require an additional device such as a set-top box.

## ❑ Using 3D glasses – warning

- ✎ Do not use the 3D glasses as a replacement for your own corrective glasses, sunglasses, or protective goggles. Incorrect use of 3D glasses may cause eye injuries.
- ✎ Do not store 3D glasses in extreme conditions. Exposure to excessively high or low temperatures may deform the lenses. Do not use deformed glasses.
- ✎ Do not apply pressure to 3D glasses or subject them to any impact. Subjecting 3D glasses to rough handling may damage them.
- ✎ The lenses on 3D glasses are vulnerable to scratching. Use only a soft and clean cloth for cleaning. A dirty cloth may scratch the lens surface.
- ✎ Do not scratch the lens surface of the 3D glasses with sharp objects or clean with chemicals. If the lens surface is scratched, 3D images may not display correctly.

## ❑ What is Time Machine II ?


It is a function you can use to record a programme you are currently watching or want to watch and also rewind a programme you are watching in real time.

Immediate Rec	Immediately records a programme you are watching.
Scheduled Rec	Selects a programme you want or sets the time to record.
Play	Plays back the recordings.
TimeShift	Rewinds a programme you are watching in real time.

- ✎ [Depending on model] You can also record digital/analogue programmes transmitted over an RF cable and content played through the AV IN input.
- ✎ Recording copyrighted content, provided with a set-top box using an AV jack, is not supported. Recording genuine DVD/Blu-ray titles is also not supported.
- ✎ All broadcasts are protected by copyright; you may need to obtain permission from the copyright owner prior to reproducing or playing back these broadcasts. If a user records audio or video using this device, the recordings must be for personal use only. Selling, transferring or renting recordings protected by copyright is prohibited.

## ❑ To use the immediate rec function

1 2 3 ⇒ Rec.

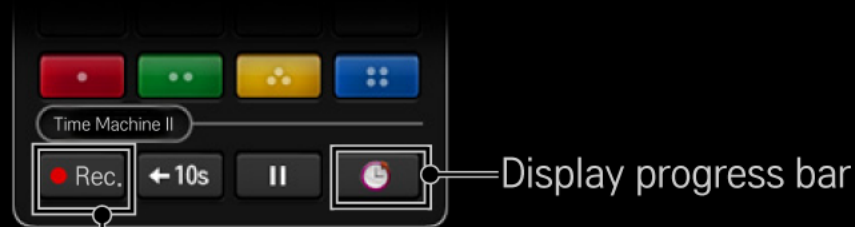

Record from the scene you are currently watching

- ✎ The picture may differ from the screen on the TV.
- ✎ The picture may differ from the screen on the TV. The **Rec.** button changes to the Recording stop (■) button while recording is in progress.

- ✎ You can also record immediately using the **Rec.** button in the Information display window.
- ✎ Up to 3 hour of instant recording is supported. To change the end time of the recording, press the **Recording stop** button and set the **Recording end time modify** option.
- ✎ The recordable time may vary depending on the capacity of your USB storage device.
- ✎ Press the **Wheel (OK)** button while recording to display information about the recording in the top right of the screen.
- ✎ The **Wheel (OK)** button operation may vary depending on your country.
- ✎ If you force your TV to power off while recording, the programme may not be saved. Ideally, you should stop the recording and check that the programme has been recorded before turning the TV off.
- ✎ Some functions may not be available while recording.

□ To stop recording


1 2 3 ⇒ ■ (Recording stop) ⇒ Recording stop

□ To modify the recording end time


1 2 3 ⇒ ■ (Recording stop) ⇒ Recording end time modify

✎ You can set up to 5 hours for Recording end time modify.

## ☐ To schedule recording

1 2 3 ⇒  (Progress bar) → **Schedule**

This is a function that allows you to set the date and time to record a programme you want to watch.

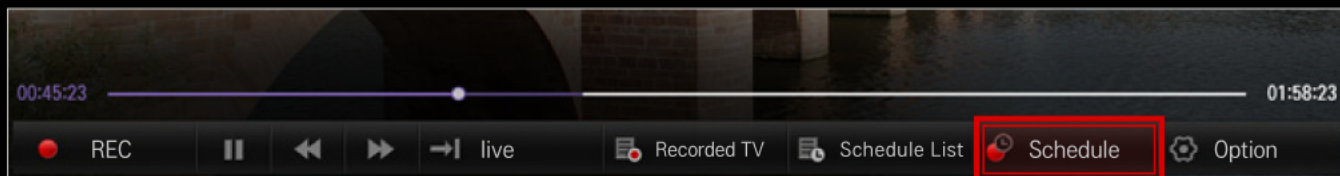


☞ You can start **Schedule** from **SMART**  ⇒ Time Machine II → **Schedule**.




## TV Guide

You can select a programme you want to schedule for watching or recording.

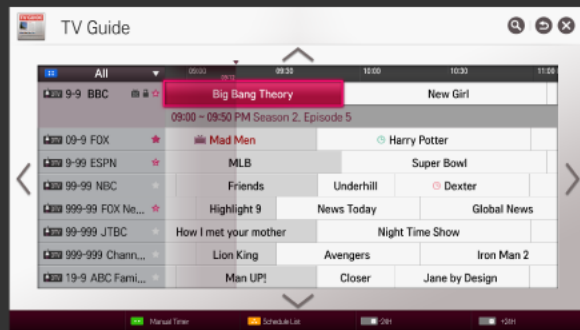


## Manual Timer

You can select a date, time and channel to schedule the watching or recording time.

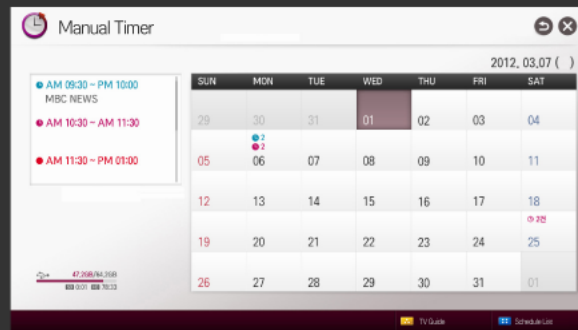




- ✎ Image shown may differ from your TV.
- ✎ When no Programme Guide is available, only the Manual Timer menus are displayed.
- ✎ The length of the scheduled recording should be at least 2 minutes.

## ☐ To check or modify the schedule list

**1****2****3** ⇒  (Progress bar) → **Schedule List**

This is a function you can use to check, modify or delete the watching and recording schedule you have set.

 Up to 30 programmes can be added to the Schedule List.


 You can start Schedule List from **SMART**  ⇒ Time Machine II → Schedule List.

## ☐ To watch recordings

SMART  ⇒ SmartShare™ → Recorded TV

You can view the recordings stored on a USB device. You can select a recording to play or delete.

Play on previous playtime.	Resumes play of a recording you have played back before.
Play from the start.	Plays back the selected recording from the beginning.
Delete	Deletes the selected recording.

 Up to 600 recordings can be added in Recorded TV.


## ☐ To manage recordings

SMART  ⇒ SmartShare™ → Recorded TV

Protection	Prevents the selected recording from being automatically deleted.
Delete	Deletes the selected recording.


## ☐ To control playback of recordings

Press the **Wheel (OK)** button on the remote control while playing.

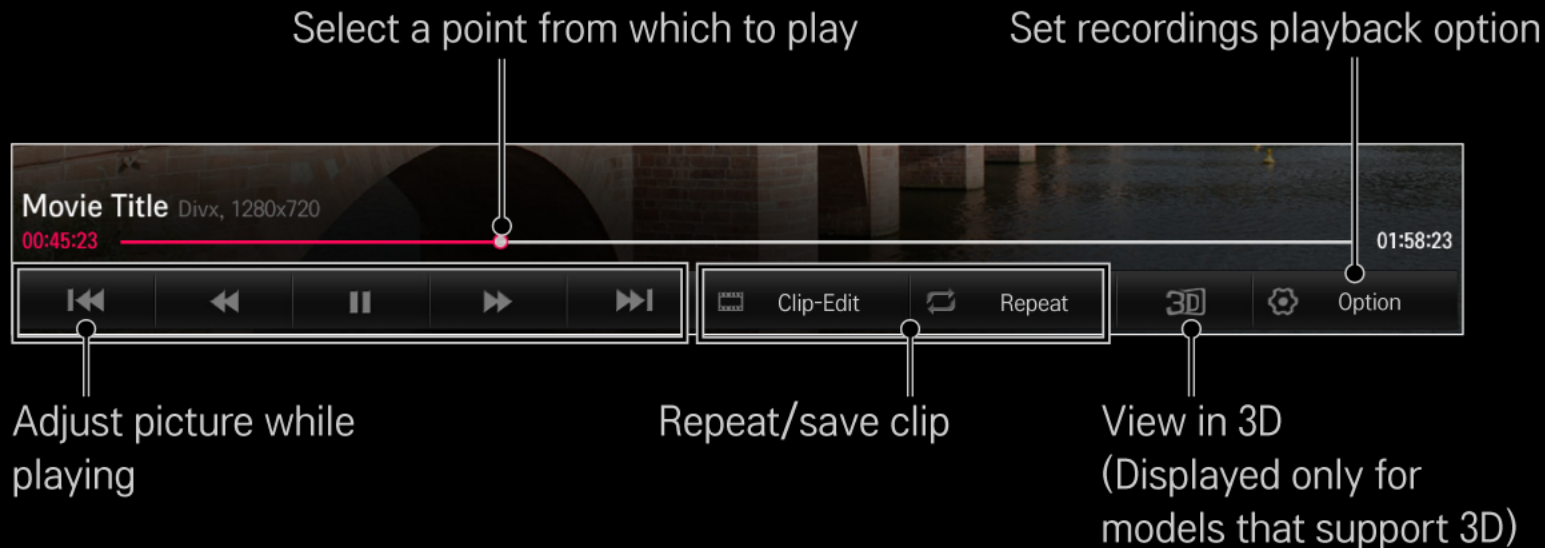

✎ The picture may differ from the screen on the TV.

## ❑ To connect a USB device for Time Machine II

- 1 Prepare a USB device to be used for Time Machine II .
- 2 Connect a USB storage device to the port with the **HDD IN** label at the back or on the side of your TV.
- 3 To use a USB device only for the Time Machine II function, you must initialise the device.  
Select **SMART**  ⇒ Time Machine II → Option → USB device  
initialisation if you connect a device that has not been initialised. The USB device initialisation screen appears.
- 4 To complete USB Device Initialisation and use TimeShift, set the TimeShift mode to ON.

- ✎ You can use a Hard Disk Drive (HDD) or Solid State Drive (SSD) as a USB device for Time Machine II only.
- ✎ It is recommended that you use a USB device with a capacity between 40 GB and 2 TB.
- ✎ For an SSD, there is a limit to the amount of reading/writing that can be done. Therefore, it is recommended that you use a HDD.
- ✎ To remove a USB device, select **Quick Menu** → **USB Device**. Make sure you receive the confirmation message that the USB device has been removed.
- ✎ If a USB device is faulty, the Time Machine II function may not operate normally.
- ✎ If you use a USB extension cable, the USB device may not be recognized or may not work properly.

## ❑ What is TimeShift (real-time playback)?


It is a function you can use to save the programme you are currently watching temporarily on a USB device so you can play back a scene you missed while watching TV. This function allows you to continue watching from where you were previously if you go out for a while.

- ✎ You have to set the TimeShift mode to ON after connecting a USB device to use the TimeShift function.
- ✎ [Depending on model] This function works for analogue/digital programmes and AV input mode.
- ✎ With the TimeShift function, you can play a programme back for up to two hours. This time may vary depending on your region.
- ✎ While in the TimeShift mode, the picture stored by this function is deleted if you turn off the TV without recording it.



## ❑ To use the TimeShift (real-time playback) function

Use the left or right navigation button on the Magic remote control to wind the picture you are watching back or forward by 10 seconds.

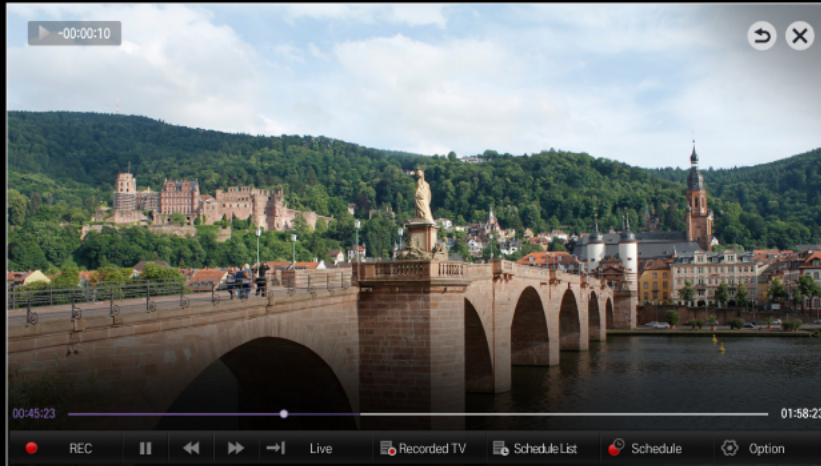


✎ You can also operate TimeShift using the left or right navigation button on a standard remote control.

## ❑ To set the Time Machine II functions

SMART  ⇒ Time Machine II → Option

You can change the settings for Time Machine II while using the function.

Recording Quality	<p>[Depending on model]</p> <p>Sets the picture quality of recordings. You can set it to High Quality or Normal Quality.</p> <p> The recording time may vary depending on the recording quality.</p>
TimeShift	<p>Plays back a scene that you have missed.</p> <ul style="list-style-type: none"><li>• <b>ON:</b> Enables the TimeShift function automatically when you turn on the TV.</li><li>• <b>OFF:</b> Disables the TimeShift function.</li></ul>

Auto deleting	Automatically deletes old recordings when a USB device is full in order to secure space to save new recordings. ✎ Protected recordings are not deleted automatically.
USB Device initialisation	Sets a connected storage device to be used only for Time Machine. All data saved on the USB device is deleted.

- ✎ A storage device on which **USB Device initialisation** has been performed will not be detected by a PC.
- ✎ Recordings saved on a USB device can be damaged. The manufacturer is not liable for any damaged recordings since it is the user's responsibility to manage data.

## ❑ What is Motion Recognition?



You can control the TV simply by gesturing for the camera.



You can use the Motion Recognition function to turn the TV off, change the channel and control the volume.


- ✎ Motion Recognition is only a function for watching TV and it is not supported when using the smart menu, such as when connecting wireless devices, including TV apps or USB ports.




## ❑ To use the Motion Recognition function

- 1 Prepare the Smart TV camera for use. If your Smart TV is not equipped with a camera, install an LG video call camera (Sold separately). (For more information, please refer to the installation manual or owner's manual of the camera.)
- 2 The camera is activated 20 to 30 seconds after the TV is switched on.
- 3 Go to **SMART**  ⇒ Settings → **OPTION** and check if Motion Recognition is set to On.
- 4 Stare at the camera while the TV is on and hold your hand up close to your face. The motion recognition controller appears on the TV screen. (You can check the motion recognition range of the camera in **SMART**  ⇒ Settings → **OPTION** → Camera Setting Help.)

- 5 Move your hand left, right, up or down to select a function. Close and open your fist to start the function.
  - 6 If you lower your hand out of the range of motion recognition, the controller disappears from the screen.
-  If you clench your fist for more than one second, the selected function is performed repeatedly until you open your hand.
  -  If you are watching TV using a set-top box, install an IR blaster (AN-BL100, sold separately) to control the volume and the channel of the set-top box using Motion Recognition.

-  The Motion Recognition may not be working properly if:
- You are in either too bright or too dark place. (Optimal ambient brightness: 50 lux - 600 lux)
  - Your face cannot be detected by the camera because of the light behind you.
  - Your face is not detected by the camera because you are wearing a hat
  - The distance between you and the camera is too close or too far (Ideal distance: 1.5 m - 4.5 m)
  - Your fingers cannot be detected by the camera because you are wearing gloves or a bandage.
  - You moved your arm forward or your hand is not close enough to your face.
  - Your skin colour is similar to the background colour.
  - The background is striped.

- ✎ A gesture may not be recognised in the following cases.
  - If Motion Recognition is set to Off in SMART  ⇒ Settings → OPTION,  
: Set it to On.
  - If any other menu than the motion recognition controller is displayed on the TV screen,  
: Make it disappear.
  - (For the built-in camera) If the camera is not lifted up,  
: Make sure to lift up the camera.
- ✎ Devices connected through a USB port or a wireless connection cannot be switched via Motion Recognition.




- ✎ If more than one hand is detected by the camera, it works with the first detected hand only. To use another hand to operate the controller, lower your hand down to clear the controller from the screen and then raise your hand up again.
- ✎ If you hold your hand up with it spread out or gripped, the camera may not detect your hand. Make sure that you raise your hand with all five fingers clearly displayed.
- ✎ Be careful not to move your hand too fast or make too big motion. Move your hand slowly near your face.
- ✎ If **Motion Recognition** does not work properly, lower your hand and then lift it up again.
- ✎ If you open your hand at an angle, the camera might mistake this as a fist and perform the selected function.

# ❑ To Use the Pentouch Built-In Function

## ❑ Using Wireless Touch Pen

- 1 Connect the Pentouch dongle to the TV USB port.
- 2 Press the **POWER** button to start touch mode.
- 3 Press the **TOUCH HOME** button of the touch pen or touch the TV screen using the touch pen to select **Touch Home**.


 The Pentouch function only works with the touch pen.


 You can also select **SMART**  ⇒ **Touch Home**.

## □ Using Wired Touch Pen

[Depending on model]

- 1 Connect the wired touch pen to the USB port on the back of the television.
- 2 Press the **POWER** button at the top to start touch mode.
- 3 Touch the TV screen with the wired touch pen and select **Touch Home**.

 The Pentouch function only works with the touch pen.

 The wired touch pen functions may vary depending on the touch pen model.

 You can also select **SMART**  ⇒ **Touch Home**.

## □ To Use the Pentouch Built-In Function (Continued)

Show the touch pen's battery level


Quick owner's manual for Pentouch

Import an image or select a path to save it



## ☐ To Use the Drawing Toolbar


If you select the drawing mode in My Gallery, Office Viewer or Internet the drawing toolbar will display at the bottom of the screen.

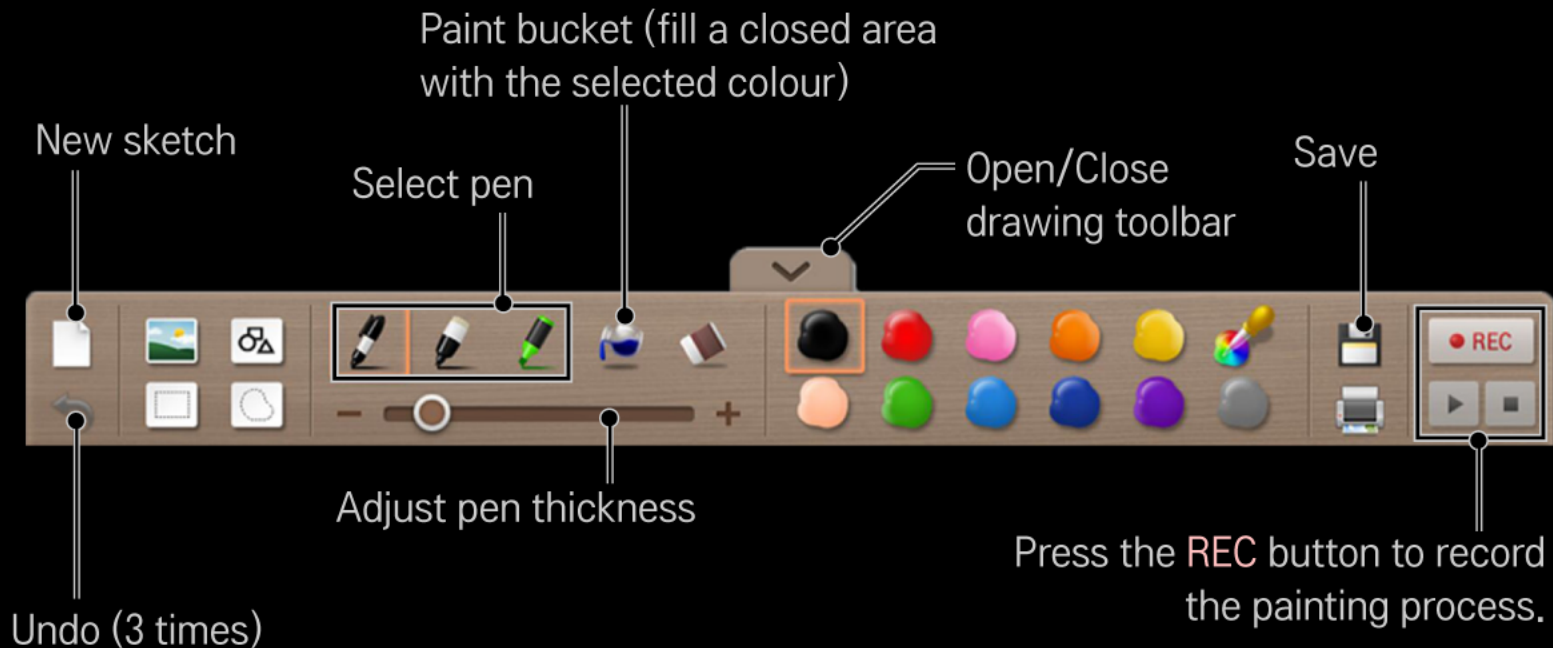

Press the REC button to record the painting process.

## □ To Use the Drawing Toolbar (Continued)


- ✎ If multiple images overlap each other, the eraser may function more slowly than usual.
- ✎ Cut/Move/Resize/Rotate can only be used for a single drawing object.
- ✎ If you use two touch pens, the drawing toolbar shows the setting of the touch pen that you used last.

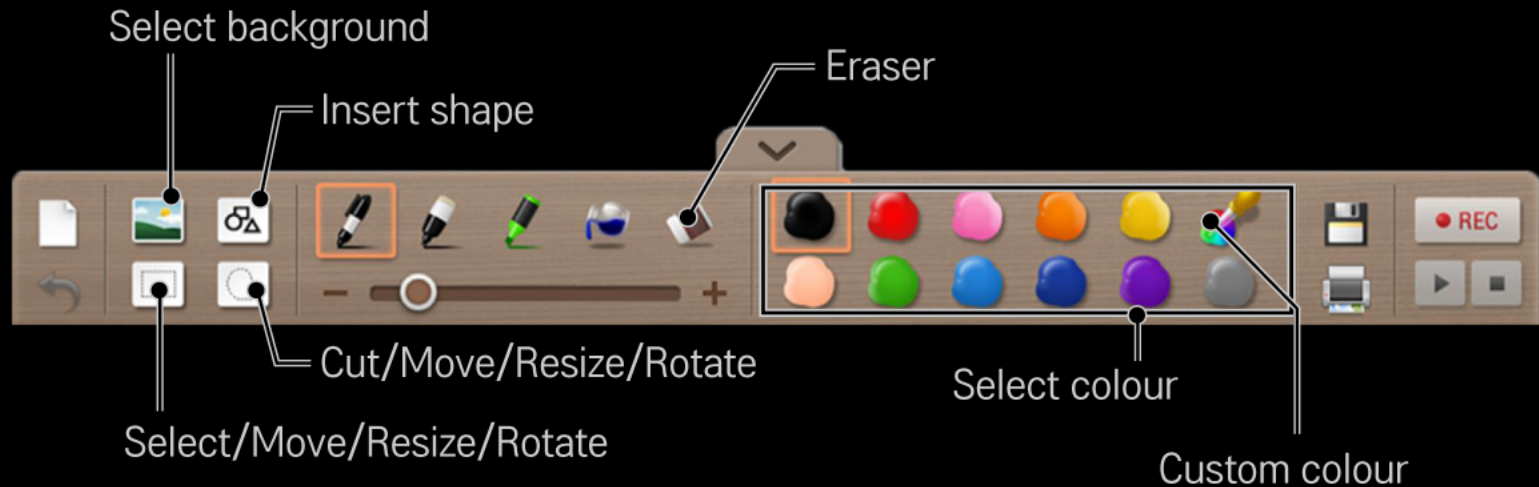

## ☐ To Use the Print Function

- ✎ Press the Print button and set the properties to print out using the connected printer.

Search and  
Select Printer

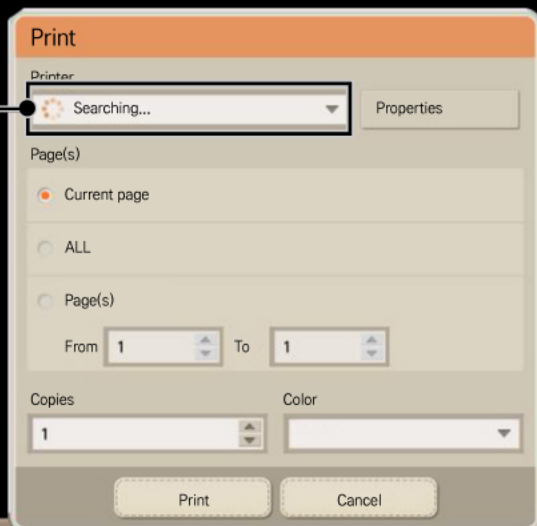

Print



## □ To Use the Print Function (Continued)

Select a printer and press the Properties button to view the settings of the printer connected to Touch Home.


- ✎ If the printer cannot be searched on the dropdown list, check whether the TV and the printer are in the same network environment. The TV and the printer need to be connected to the same AP device via a wireless/wired connection.
- ✎ If two or more printers are connected an AP device, you can choose one printer in the list.
- ✎ To search an additional printer, press the **Search** button in the list.
- ✎ Refer to the installation manual of the printer for the printer settings.



## □ To View the Supported Printer List

Please check the printer manufacturers and models which support Simple Network Management Protocol SNMP (Simple Network Management Protocol).


You can also check the supported printers as below.

- 1 Select the SUPPORT tab on the LG Electronics web site and search using your TV's model number.
  - 2 Select the MANUALS & DOCUMENTS tab.
  - 3 You can check the list of supported printers by selecting the user guide.
- ✎ For the website information, go to **SMART**  ⇒ Settings → Customer Support → Product/Service Info.
  - ✎ The Print function is only available on a printer supports SNMP.

# ☐ To Use the Sketchbook Function

SMART 🏠 ⇒ Touch Home → Sketchbook


Location of the current Sketchbook  
You can draw a picture over three  
pages.

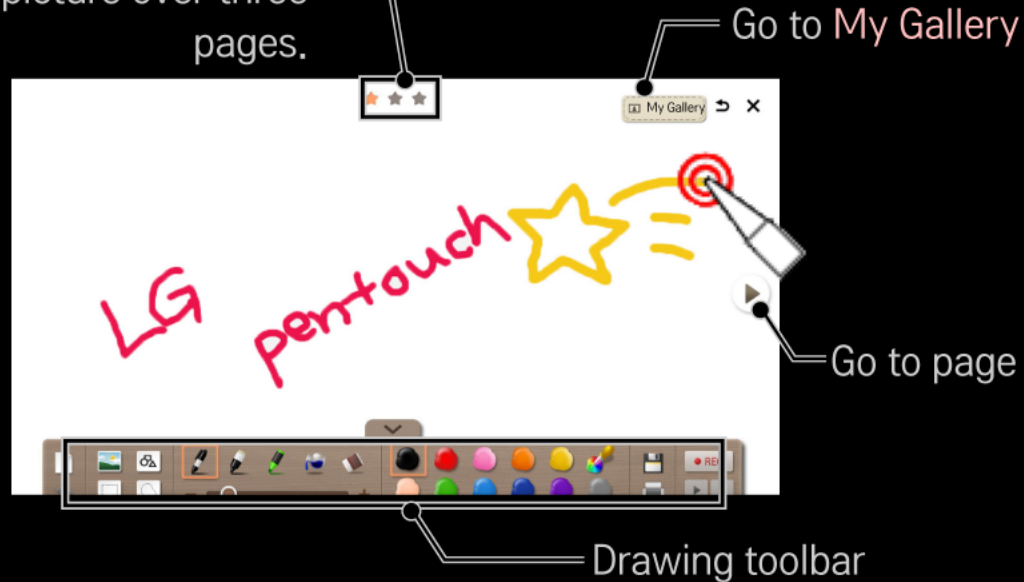

# ☐ To Use the My Gallery Function

SMART 🏠 ⇒ Touch Home → My Gallery


View all images      View the images by menu

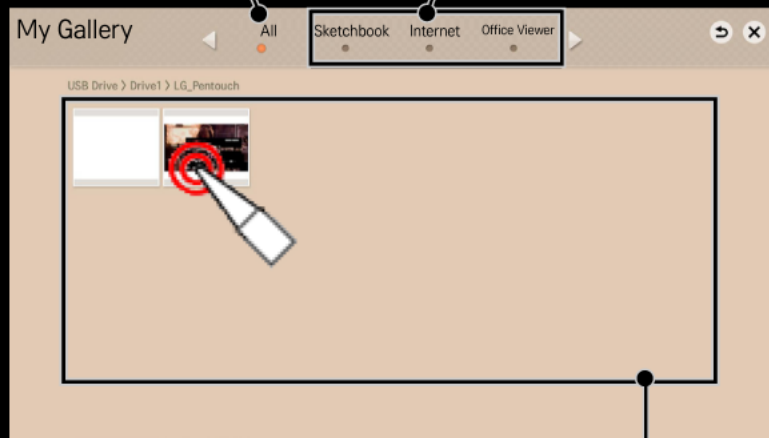

Select the image you want

# □ To Use the My Gallery Function (Continued)

SMART 🏠 ⇒ Touch Home → My Gallery → Select the photo you want

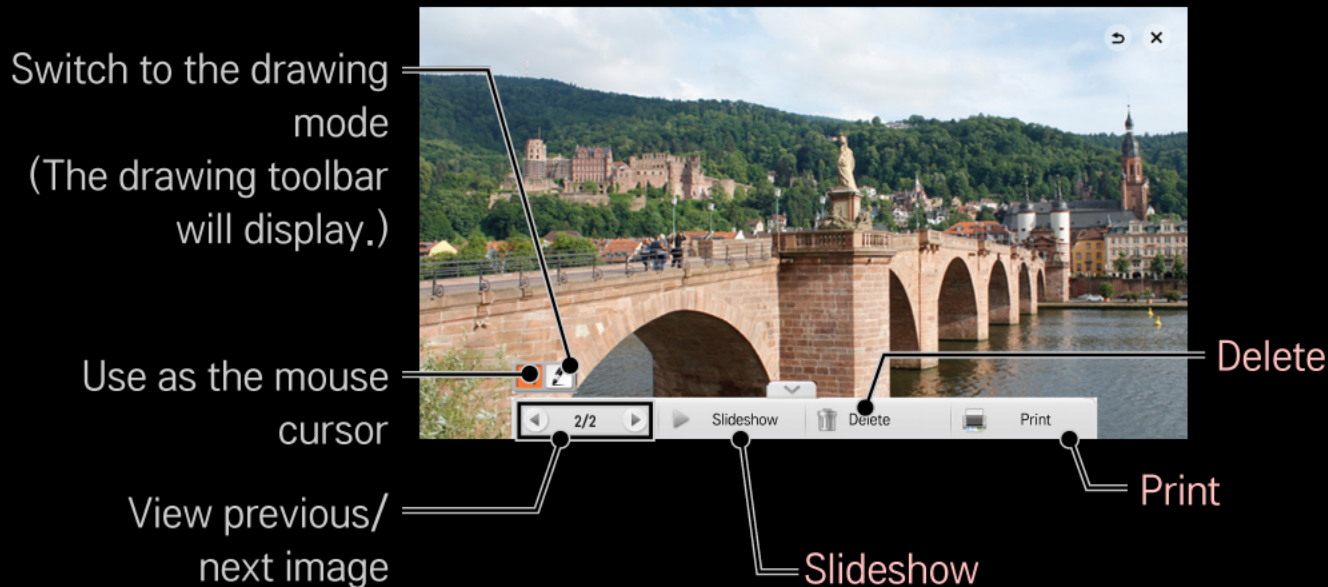

# ☐ To Use the Office Viewer Function

SMART  ⇒ Touch Home → Office Viewer

- ✎ You can only use Office Viewer when a USB storage device is connected. Connect the USB storage device containing Microsoft Office files (.xls, .xlsx, .ppt, .pptx, .doc, .docx), Adobe Acrobat files (.pdf) or text files (.txt).




— Select the file you want.

## □ To Use the Office Viewer Function (Continued)

**SMART**  ⇒ Touch Home → Office Viewer → Select the file you want

 If you draw a picture in Office Viewer, it will be saved in \*.jpg format.

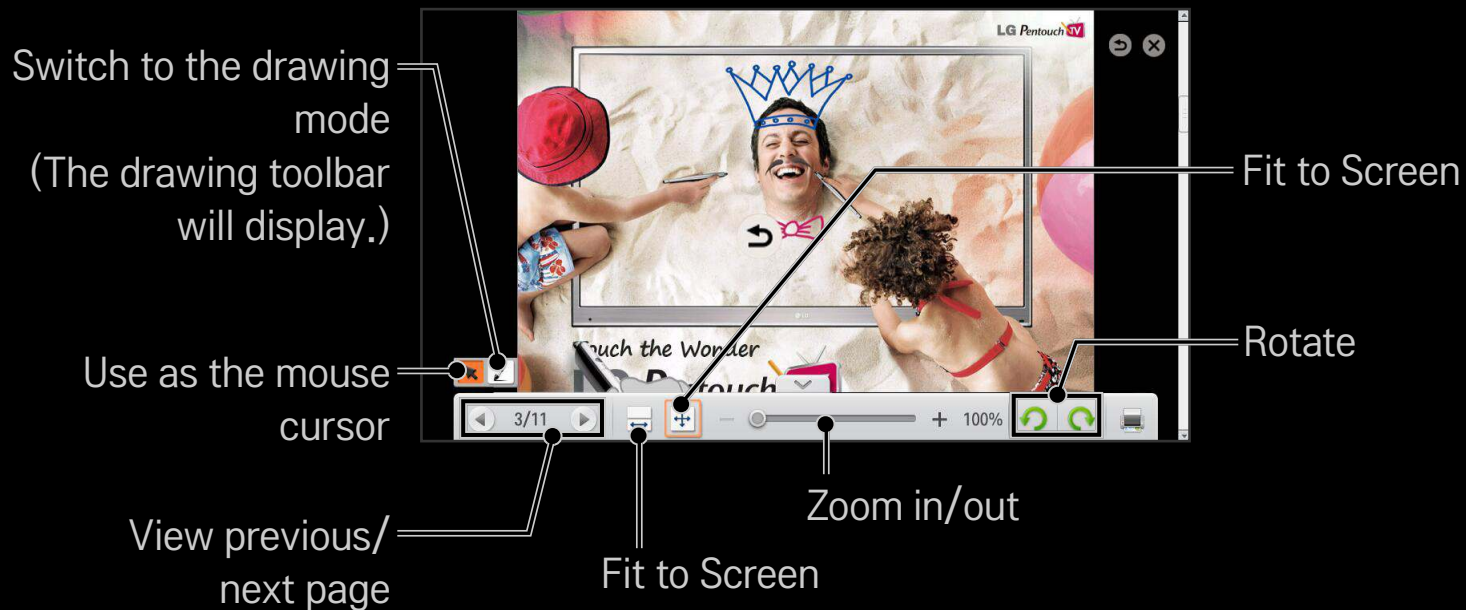

- ✎ You may not be able to open a file if it is too large.
- ✎ Some documents may look differently from the ones displayed on your PC screen.
- ✎ Some languages are not supported.

# ☐ To Use the Internet

SMART  ⇒ Touch Home → Internet

Use the Internet




Use as the mouse cursor


Switch to the drawing mode  
(The drawing toolbar will display.)






## □ To Use the Internet (Continued)

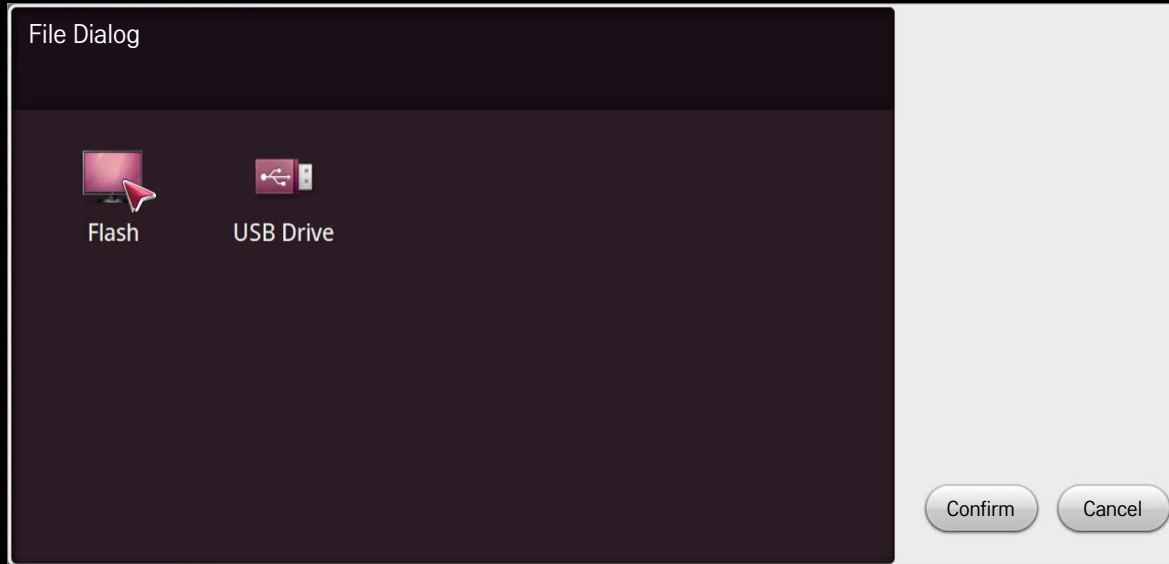
When you write an email using the Internet function in Touch Home, you can select and attach a sketch from the TV or USB using the Attach button in the email as shown below.



 You can save your email attachment on the connected USB.

## ❑ To Use the PC Link Function

- 1 Connect an external input device to the TV using the HDMI cable.
  - 2 **SMART**  ⇒ Touch Home → PC Link and select the input mode used to connect the device.
- After selecting the input mode, you can draw a picture using the drawing toolbar.
  -  / : You can play or pause a video file from the external device connected to PC Link.

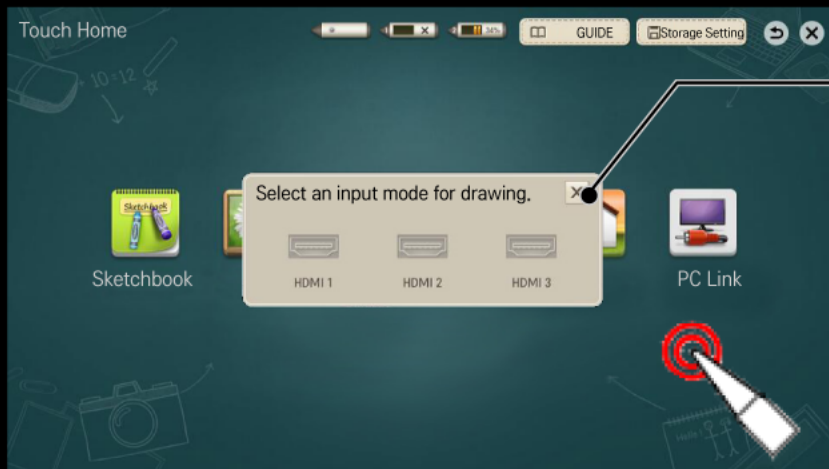


Select the input mode the external input device used to connect to the device.

- ✎ The recommended PC resolution is FHD 1920x1080 at 60Hz / HD 1024x768 at 60Hz.
- ✎ If nothing is displayed on the screen after selecting the input mode, check the external input device connection.
- ✎ When using a PC or Notebook via an HDMI cable, you should set the name of the HDMI input to PC or Notebook under **Input List** → **Change Device Name** before entering Touch Home.

## ❑ To Use the Pentouch Function with an MHL

Select the Touch Home button on the screen displayed through the Mobile HD Link (MHL) using a touch pen to use the Pentouch function.

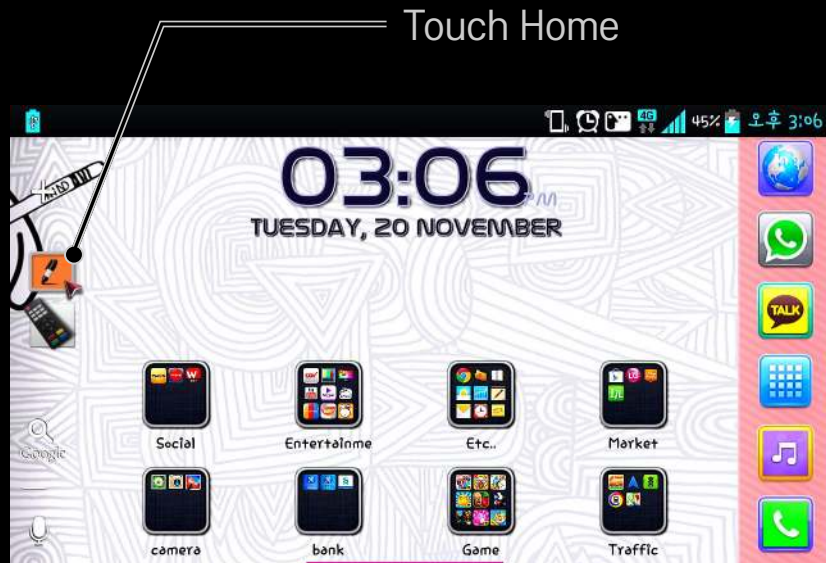

# ❑ To Use the Pentouch Function with SmartShare™


You can view photo and video content in SmartShare™ while using the Pentouch function.


✎ Image shown may differ from your TV.





Touch Home

## ❑ To Use the Pentouch Function with a PC

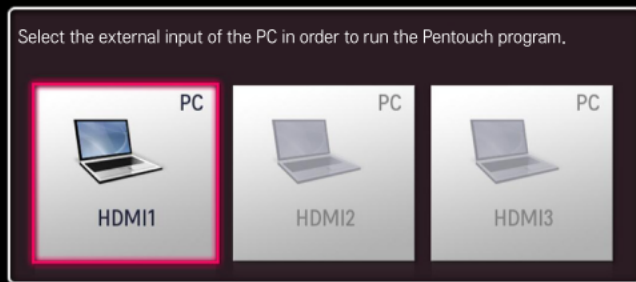- 1 Connect the Pentouch dongle to the USB port of the PC that the Pentouch program is installed on.
- 2 Select **SMART**  ⇒ Touch Home using the remote control.
- 3 Select the input mode used to connect your PC.





-  If you use the Pentouch function with your PC, the TV menu is only controlled with the remote control.
-  The Pentouch function with a PC may differ from the Pentouch built-In function.

## □ Installing the Pentouch Program

To Use the Pentouch Function with a PC, the Pentouch program should be installed on the PC.

Follow the steps below to install the Pentouch program.

- 1 Select the SUPPORT tab on the LG Electronics web site and search using your TV's model number.
  - 2 Select the SOFTWARE UPDATE tab.
  - 3 Select and install the program. You can also view the Pentouch installation guide.
-  For the website information, go to **SMART**  ⇒ Settings → Customer Support → Product/Service Info.

# ❑ SNMP Supported Printer Model List.

Type	Brand Name	Printer Name/Number	PDL (EG)	Wireld/Wireless
Inkjet/Photo	Canon Inkjet	Canon PIXMA MP560	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MP640	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MP950	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MP960	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MP970	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MP980	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MP990	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX410	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX420	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX700	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX7600	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX850	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX860	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX870	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX880	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA MX885	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA Pro9000	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA Pro9000mk2	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA Pro9500	BJ Raster	Y
Inkjet/Photo	Canon Inkjet	Canon PIXMA Pro9500mk2	BJ Raster	Y
Inkjet/Photo	Epson Inkjet	Epson Artisan 730 (no 720)	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Artisan 800	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Artisan 830	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office BX310FN	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office BX320FW	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office BX610FW	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office BX620FWD	Esc/P and Esc/P-R	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wireld/Wireless
Inkjet/Photo	Epson Inkjet	Epson Stylus Office TX515FN	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo PX700W	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo PX710W	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo PX800FW	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo PX820FW	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson TX510FN Series	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson TX600FW Series	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson TX610FW Series	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson TX720 Artisan720 Series	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson TX720WD Series	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 610	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 620	Esc/P and Esc/P-R	Y
Inkjet/Photo	Epson Inkjet	Epson Artisan 810	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Artisan 835	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson ME Office 560W	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson ME Office 650FN	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson ME Office 700FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson ME Office 900WD	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office BX525WD	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office BX600FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office TX510FN	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office TX525FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Office TX600FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo PX720WD	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo PX810FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo TX700W	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo TX710W	Esc/P - R	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo TX800FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus Photo TX810FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX420W	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX425W	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX510W	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX515W	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX525WD	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX600FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX610FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson Stylus SX620FW	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 1100	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 30	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 310	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 320	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 323	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 325	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 40	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 500	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 520	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 525	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 600	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 600	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 630	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 635	Esc/P - R	Y
Inkjet/Photo	Epson Inkjet	Epson WorkForce 840	Esc/P - R	Y
Inkjet/Photo	HP Inkjet	HP Photosmart A820 Series	PCL3	Y
Inkjet/Photo	HP Inkjet	HP Photosmart A820 Series BT	PCL3	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 1000	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 1200	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 2200/2250	PCL3GUI	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
Inkjet/Photo	HP Inkjet	HP Business Inkjet 2300 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 2800 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 3000	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 3000 PS	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Color Inkjet cp1700	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 3000 – J310a	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 3510	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 460 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 5150 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 5400 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 5550 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 5900 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 6600 Series – H711a/H711g	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 6800 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 6940 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 6980 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet F4400 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Digital Copier 410	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Envy 110 e All - In - One Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Envy 120 e All - In - One Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 100 Mobile	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 4500 All - In - One Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 6300 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 6500 E709a Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 6500 E709n Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 6500A e - All - In - One Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 7000 Wide Format Printer – E809a	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 7100 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 7200 series	PCL3GUI	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
Inkjet/Photo	HP Inkjet	HP Officejet 7300 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 7400 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 7500A Wide Format e - All - In - One Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 8500 All - In - One Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 8500A e - All - In - One Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet H470 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet J4500 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet J4660 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet J4680 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet J5700 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet J6400 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet K7100 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 6000 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8000	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8000 A809 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8100 – N811a/N811d	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8500 A909a Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8500 A909a Series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8500 A909g Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8500 A909g Series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8500 A909n Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8500 A909n Series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8600 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro K5300 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro K5400 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro K550 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro K850 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7300 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7400 Series	PCL3GUI	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7500 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7500 Series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7600 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7600 Series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7700 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro L7700 Series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart 5514 – B111h	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart 6510 – B211a	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart 6520	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart B110 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C5100 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C5200 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C5300 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C5300 series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C5500 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C5500 series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C6100 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C6100 series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C6200 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C6300 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C6300 series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C7100 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C7100 series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C7200 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C7200 series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C8100 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart C8100 series BT	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart Wireless e - All - In - One series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Deskjet 3520	PCL3GUI	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
Inkjet/Photo	HP Inkjet	HP Officejet 4620 e-All-in-One Printer	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 6600 e-All-in-One Printer - H711a/H711g	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Officejet 6700 Premium e-All-in-One Printer - H711n	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart 5520	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Photosmart 7520	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP PSC 1500 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP PSC 1600 series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP PSC 2100 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP PSC 2150 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP PSC 2500 Series	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP OfficePro 8600	PCL3GUI	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 2600 Series	PCL5C	Y
Inkjet/Photo	HP Inkjet	HP Officejet 9100	PCI5C, PCL6	Y
Inkjet/Photo	HP Inkjet	HP Officejet 9100 series PS	PCI5C, PCL6	Y
Inkjet/Photo	HP Inkjet	HP Business Inkjet 3000 PCL6	PCL6	Y
Inkjet/Photo	HP Inkjet	HP Universal Printing PCL6	PCL6	Y
Inkjet/Photo	HP Inkjet	HP Universal Printing PCL6 (v5.3)	PCL6	Y
Inkjet/Photo	HP Inkjet	HP Universal Printing PS	PCL6	Y
Inkjet/Photo	HP Inkjet	HP Universal Printing PS (v5.3)	PCL6	Y
Inkjet/Photo	HP Inkjet	HP Officejet Pro 8000 Enterprise A811a	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 1135n Laser MFP	GDI	Y
PCL Laser	Dell Laser	Dell Laser Printer 1235cn Color Laser MFP	GDI	Y
PCL Laser	HP Laser	HP LaserJet 3200 Series PCL 5	PCL5	Y
PCL Laser	HP Laser	HP LaserJet 3300 Series PCL5	PCL5	Y
PCL Laser	Brother Laser	Brother DCP - 7025	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother DCP-8020	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother DCP - 8025D	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1060 BR-Script2	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1270N BR-Script2	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Brother Laser	Brother HL-1470N BR-Script2	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1650/70N	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1650/70N BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1650/70N BS3000	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1660 BR-Script2	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1660e BR-Script2	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1850/1870N	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1850/70N	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1850/70N BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-2060 BR-Script2	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-2400Ce BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-2460 BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-2460 BS3000	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-2700CN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-3070CW BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-3260N BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-3400CN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-3450CN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-4000CN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-4200CN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-5050 BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-5070DN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-5070N BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-5150D BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-5170DN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-5240 BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL-5270DN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5340D BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5350DN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5370DW BR-Script3	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Brother Laser	Brother HL - 5380DN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050 BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050D/DN	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050D/DN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050DN BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 7050 BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother HL - 8050N BR-Script3	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother MFC - 7840N	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother MFC - 8420	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother MFC - 8640D	PCL5 and PCL6	Y
PCL Laser	Brother Laser	Brother MFC - 8820D	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon ColorPASS-Z20e	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon ColorPASS-Z40	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon ColorPASS-Z40e	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon ColorPASS-Z5000	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon ColorPASS-Z60	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon ColorPASS-Z60 V2.0	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon CP2120-2150 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon CP660 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon CP660 PS-A1	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon CP660 PS-A1S	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon GP200/GP215	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon GP200-225 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon GP210/215 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon GP300-405 PS Ver 1.0	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon GP555-605 PS Ver 2.0P	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon GP605-605P PS Ver 1.01	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon GP605-605P PS Ver 2.0	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon imageCLASS 4000PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Canon Laser	Canon imageRUNNER C2020-2050	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon iR C2100S-2100	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon iR330-400 PS Ver 1.0	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon iR600-550-60 PS Ver 2.0	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon iR600-550-60 PS Ver 2.0P	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon iR600-60 PS Ver 1.01	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP 360PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 1000PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 1060PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 1260C PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 1260PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 1760 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 2030 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 2035 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 2260 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 2460 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 3260 PS	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 730 PS F2	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 730 PS F5	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon MEDIO PS-C1	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon MEDIO PS-D1	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon MEDIO PS-E1	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX20W	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX40	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX40 K2	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX40W	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX40W K2	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX5000	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX60	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX60 K5	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Canon Laser	Canon PS-NX60 V2.0	PCL5 and PCL6	Y
PCL Laser	Canon Laser	Canon PS-NX90	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell 2330d Laser Printer XL	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell 2330dn Laser Printer XL	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell 3330dn Laser Printer XL	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell 3335dn Laser MFP	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell 5530dn Laser Printer PS3	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell 7130cn Color Printer PS	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell 7330n PCL6	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2145cn Color Laser MFP PS	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 3100cn PS	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 5100cn PS	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell MFP Laser Printer 1600n PS	PCL5 and PCL6	Y
PCL Laser	Dell Laser	Dell MFP Laser Printer 1815 PCL6	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser 2600PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser C2600PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser C2800PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser C3800PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser C4000PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser C4200PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser C9100PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser CX21PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser M2000PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser M2010PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser M4000PS	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AcuLaser M8000	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AL - C2000 PS3	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson AL - C8500 PS3	PCL5 and PCL6	Y
PCL Laser	Epson Laser	Epson LP - 3000PS F5 v52.3	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox Abl2 Model-PR F/PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Abl2 Model-PR v2017PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 350 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 350 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 450 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 450 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 550 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 550 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 650 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 650 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C2521 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C2521 PS H2C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C2521 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C2521 PS J2C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C3626 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C3626 PS H2C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C3626 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C3626 PS J2C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C4535 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C4535 PS H2C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C4535 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C4535 PS J2C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C5540 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C5540 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C5540 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C5540 PS J5	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C6550 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C6550 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C6550 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C6550 PS J5	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox DCC 160 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC 236 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC 240 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC 285 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC 320 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC 286 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC 400 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC 355 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC 500 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC 405 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC 500 PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC 706/606/506 CP PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC 500 SVR PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC 900 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC 500 SVR PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C240 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a250 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C250 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a250 PS H2C	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C250 PS C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a250 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C320 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a250 PS J2C	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C360 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a360 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C360 PS C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a360 PS H2C	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C400 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a360 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C450 PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a360 PS J2C	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DMC C450 PS C	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a450 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 1010 PS J2 v1.0	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a450 PS H2C	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 1010 PS J2 v1.1	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a450 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 1010 PS J5 v1.0	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCC a450 PS J2C	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 1010 PS J5 v1.1	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCL 1256 SVR PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 155 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCL 1256 SVR PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 155 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCL 4055 SVR PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 185 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCL 4055 SVR PS J7	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 185 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCL 5065 SVR PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 230 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCL 5065 SVR PS J7	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 230 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DMC 1100 PS	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 251/351/401 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DMC 156 PS	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 251/351/401 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DMC 186 PS	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 280 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DMC 235 PS	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 280 PS J2	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C6550 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2424 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C6550 PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2426 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f1100 PS H3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2426 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f1100 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3140 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f235 PS H3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3140 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f235 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3530 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f285 PS H3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3530 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f285 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3540 PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f900 PS H3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3540 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f900 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C6835 SVR PS H2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 1250 PS-J2 v1.3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C6835 SVR PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 1250 PS-J5 v1.3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuWide C300 Server PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 1255 Server PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 205 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 1255 Server PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 205 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 201 PS J4	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 205-AP PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 201 PS J6	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 240A-AP PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 201 PS J9	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 255 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 250 PS/J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 255 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 250 PS/J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 255-AP PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 280 PS H3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 260 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 280 PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 260 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 400 PS/J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 305 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 400 PS/J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 305 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C1250 PS-J2 v1.3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 305-AP PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C1250 PS-J5 v1.3	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 340A PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C1255 Server PS J2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 340A PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C1255 Server PS J5	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 340A-AP PS	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2220 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 360 PS H3	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2221 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 360 PS J2	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2424 PS H2	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 401 PS H3	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox DP 401 PS J2	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner DSc524 PCL5c	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DP 405 PS H3	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner DSc532 PCL5c	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DP 405 PS J2	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner GWD2004	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DP 500 DPS	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner GWD2006	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DP 505 PS H3	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner GWD5100	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DP 505 PS J2	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner GWD7140	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DP 701/702DPS	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7026 PCL	PCL5 and PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DS DP 301	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7026n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7010 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7031n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7116 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7031nL PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7416 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7035n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7417 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7126 PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7425dn PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7126n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7435n PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7132n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7435n PS	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7145 PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7521n PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7245 PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7526dn PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7325 PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7528dn PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7325n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7531dn PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7431cn PCL5c	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7535n PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7527 PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7640n PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7527n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C8140ND	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7535n PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C8150ND	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7575 PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc224 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7675 PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc232 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP 4210N	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc328 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP 6330N	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc332 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP 8200DN PCL	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc338 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP C420DN PCL5c	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc38 PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP C430DN PS	PCL5 and PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc38u PCL5c	PCL5 and PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP C431DN PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Gestetner Laser	Gestetner SP W2470	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet    P PostScript Cartridge v52.2	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet     P PostScript Cartridge v52.2	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet     P PostScript Plus v2010,118	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet     PostScript Cartridge v52.2	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet     PostScript Plus v2010,118	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 1200 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 1220 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 2100 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 2200 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 2200 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 2200LPS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 2410PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 2420PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 2430PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3050PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3052 / 3055 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3200 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3300 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3380 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3390 / 3392 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4/4M Plus PS 300	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4/4M Plus PS 600	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4/4M PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4/4M PS (300 dpi)	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4000 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4050 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4100 Series PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	HP Laser	HP LaserJet 4200 LPS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4200 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4250 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4300 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4345mfp PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4350 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4L/4ML PostScript	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4MP	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4P/4MP PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4P/4MP PS (300dpi)	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4Si/4Si MX PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4V/4MV PostScript	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5/5M PostScript	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5000 Series PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5100 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5200/5200L PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5P/5MP PostScript	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5Si Mopier	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5Si Mopier PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5Si/5Si MX PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 6P/6MP PostScript	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 8000 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 8100 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 8150 PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9000L MFPPS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9040mfp PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9050mfp PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9055mfp PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9065mfp PS	PCL5 and PCL6	Y
PCL Laser	HP Laser	HP LaserJet Family Driver PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	IBM Laser	IBM 4019 LaserPrinter PS17	PCL5 and PCL6	Y
PCL Laser	IBM Laser	IBM 4019 LaserPrinter PS39	PCL5 and PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 32 PS	PCL5 and PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 40 PS	PCL5 and PCL6	Y
PCL Laser	IBM Laser	IBM Network Printer 12 PS	PCL5 and PCL6	Y
PCL Laser	IBM Laser	IBM Network Printer 17 PS	PCL5 and PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1832 PS3	PCL5 and PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1852 PS3	PCL5 and PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1872 PS3	PCL5 and PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1892 PS3	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IP 280	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 1036	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 2525	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 2525 DN	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 2525e	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 2838	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 3030 DN	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 3535	PCL5 and PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 4040 DN	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7020/IP-421 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7020/IP-421 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7022/IP-422 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7022/IP-422 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7022/IP-423 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7022/IP-423 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7025/IP-421 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7025/IP-421 PS-J	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Konica & Konica Minolta Laser	Konica 7030/IP-421 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7030/IP-421 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7033/IP-402 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7033/IP-411 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7035/IP-421 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7035/IP-421 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7040/IP-402 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7040/IP-411 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7045/IP-431 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7045/IP-431 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7050/IP-201 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7050/IP-301 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7050/IP-302 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7055/IP-303 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7055/IP-303 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7055/IP-304 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7055/IP-304 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7060/IP-302 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7060/IP-302 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7060/IP-302 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7065/IP-303 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7065/IP-303 PS-J	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7065/IP-304 PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Konica & Konica Minolta Laser	Konica 7075/IP-601 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Force 50/IP-302 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7075/IP-601 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Force 60/IP-302 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7085/IP-602 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Force 60/IP-304 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7085/IP-602 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Force 65/IP-511 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7122/IP-422 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Force 75/IP-601 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7122/IP-423 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Force 85/IP-602 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7130/IP-422 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica KL - 3015 (PS)	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7130/IP-422 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica KL - 3015 K2	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7130/IP-423 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 1050 PS(P)	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7130/IP-423 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 350/250/200 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7135/IP-423 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 360 PS(P)	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7135/IP-423 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 40P PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7145/IP-432 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 500/420 PS(P)	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7150/IP-302 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 501/421/361PS(P)	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7150/IP-304 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7085/IP-602 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7150/IP-304 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7085/IP-602-J PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7155/IP-511 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7145/IP-432 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7155/IP-511 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7145/IP-432-J PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7165/IP-511 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7222/IP-424 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7165/IP-511 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7222/IP-424-J PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7170/IP-303 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7228/IP-424 PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica 7170/IP-304 PS-J	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7228/IP-424-J PS	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Force 50/IP-301 PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7235/IP-424 PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7235/IP-424-J PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc1650EN PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7255/IP-511A PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc2450 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7255/IP-511A-J PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc2550 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7272/IP-511A PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc4650 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 7272/IP-511A-J PS	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc4695MF PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 750/600 PS(P)	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc5450 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 751/601 PS(P)	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc5550 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 920 PS(P)	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc5570 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C10P PS PPD	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc5650 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C20 PS PPD	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc5670 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C200 PS (P)	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc7450 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C20P PS PPD	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc7460CK PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C250 PS (P)	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc8460CK PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C252 PS (P)	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta mc8650 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C30P PS PPD	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta PagePro 4650 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C31P PS PPD	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta PagePro 5650 PS PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C351 PS(P)	PCL5 and PCL6	Y	PCL Laser	Konica & Konica Minolta Laser	Konica Minolta PagePro 9100 PPD	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C352/C300 PS(P)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera Ci-1100	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C353 Series PS(P)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera Copystar 250ci (KPDL )	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C450 PS(P)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera Copystar 300ci (KPDL )	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C451 PS(P)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera Copystar 400ci (KPDL )	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta C650/C550 PS(P)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera Copystar 500ci (KPDL )	PCL5 and PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta magicolor 7300 PPD	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera CS 250ci KPDL	PCL5 and PCL6	Y
					PCL Laser	Kyocera - Mita Laser	Kyocera CS 300ci KPDL	PCL5 and PCL6	Y
					PCL Laser	Kyocera - Mita Laser	Kyocera CS 400ci KPDL	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Kyocera - Mita Laser	Kyocera CS 500ci KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita EP C320DN (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS 500ci KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS-1000 (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-1650	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS-1000+ (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-1815	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS-1018MFP	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-2050	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1030D (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-2550	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1100 (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C2520(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1118MFP	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C2525E KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1200 (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C2525E(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1300D (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C3225(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1350DN (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C3225E KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1550 (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C3225E(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1550+ (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C3232(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1550A (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C3232E KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1600 (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C3232E(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1600 (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C4008(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1600+ (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C4035E KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1600A (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera CS-C4035E(KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1600A (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita Ci-1100 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1700	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita DP-1400 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1700 (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita DP-1800 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1700 (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita DP-2800 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1700+ (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita DP-2800Plus (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1714M	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita DP-3600 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1714M (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita EP 370DN (KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1750 (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita EP 470DN (KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS-1800 (KPD L-2)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita EP 510DN (KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 2000D (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita EP C170N (KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 2020D (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita EP C220N (KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 3400 (KPD L )	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita EP C270N (KPD L )	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 3400+ (KPD L )	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - C8100DN (KPD L)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita P-2000	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - C8100DN+ KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita P-2002	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 3035	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 250ci (KPD L)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 3050	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 250ci KPD L	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 4030	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 300ci (KPD L)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 4035	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 300ci KPD L	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 5035	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 400ci (KPD L)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C2520 (KPD L)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 400ci KPD L	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C2525E (KPD L)	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 500ci (KPD L)	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C2525E KPD L	PCL5 and PCL6	Y	PCL Laser	Kyocera - Mita Laser	Kyocera - Mita TASKalfa 500ci KPD L	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C3225 (KPD L)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier 2138 PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C3225E (KPD L)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier 2145 PCL	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C3225E KPD L	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LD024c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C3232E (KPD L)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LD032c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C3232E KPD L	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LD-232c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C4008 (KPD L)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LD-238c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C4035E (KPD L)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP020c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - C4035E KPD L	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP025N/LP026N PCL	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-1700 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP031c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-1800 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP032 PCL	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-3700 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP036c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-3800 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP116c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-6300 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP122c/LP121c PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-6700 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP124w	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-6700S (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP125cx/LP126cn PCL5c	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-6800 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP127n/LP128n PCL	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-7000 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP128 PCL	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-7700 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP131n PCL	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-800 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP131nL PCL	PCL5 and PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita LS-9000 (KPD L-2)	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier LP135n PCL	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier LP136n PCL	PCL5 and PCL6	Y	PCL Laser	Lanier Laser	Lanier SP C431DN	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP137CN	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark 169 PS3	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP138c PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark 170 PS3	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP142CN	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark 171 PS3	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP145n/SP 8100DN PCL	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark 194 PS3	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP150dn/SP8200DN PCL	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C510 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP175/LP175hdn PCL	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C520	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP222cn/LP221c PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C520 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP226c/SP C410 PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C522	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP231c/SP C411 PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C522 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP235c PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C524	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP235N	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C524 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP331cn/SP C420 PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C530 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP332c PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C532 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP335c PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C534 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP37N	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C540	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP440c/SP C811DN PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C540 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP540C/SPC820DN	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C543	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LP550C/SPC821DN	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C543 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LW324	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C544	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LW326	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C544 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LW5100	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C546	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier LW7140	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C720 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4100N L	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C734	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4110N PCL	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C736	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4210N	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C750 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 6330N	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C752 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 9100/LP275 PCL	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C760 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier SP C400DN PCL5c	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C762 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lanier Laser	Lanier SP C430DN	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark C770 PS (MS)	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark C772 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra S 1650 PS	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C780	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra Se 3455 PS	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C780 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra T610 PS	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C782	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra T612 PS	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C782 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra T614 PS	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C910 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra T616 PS	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C912 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra W810 PS	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C920 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T420 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C930	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T430 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C935	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T520 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C935 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T522 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E234n PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T620 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E260	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T622 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E322 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T630 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E323 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T632 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E330 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T634 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E332n PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T640 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E340 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T642 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E342n PS (MS)	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T644 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E460dn	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T652	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra C710 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark TG654	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra Color 45 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W820 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra E312 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W840 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra Ep PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W850	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra K 1220 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X203n	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra M410 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X204n	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra M412 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X422 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra R Plus Series PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X466dte	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra S 1250 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X466dwe	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark Optra S 1255 PS	PCL5 and PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X543	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark X543 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X544	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X544 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X546	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X651 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X652 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X654 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X656 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X658 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X734 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X736 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X738 de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X830e PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X832e PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X862de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X864de	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X940e	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X940e PS (MS)	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X945e	PCL5 and PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X945e PS (MS)	PCL5 and PCL6	Y
PCL Laser	Minolta Laser	Minolta CF910 Fiery X2e J	PCL5 and PCL6	Y
PCL Laser	Minolta Laser	Minolta CF910 Fiery ZX J	PCL5 and PCL6	Y
PCL Laser	Minolta Laser	Minolta Color PagePro EX J PS	PCL5 and PCL6	Y
PCL Laser	Minolta Laser	Minolta Color PagePro PS K2	PCL5 and PCL6	Y
PCL Laser	Minolta Laser	Minolta Pi6200J	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 2060 Print System (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 2425 (Kanji F6)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 2425 (Kanji F7)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 2425 Print System (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 3260 (Kanji F2)	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Minolta - QMS Laser	Minolta - QMS 3260 (Kanji F7)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 3260 Print System (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 4032 Print System (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 4060 (Kanji F2)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 4060 Print System (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 860 (Kanji F6)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2 (Kanji F2)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2 (Kanji F5)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2 (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2+ (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2+CXE (Kanji F2)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2+GXE (Kanji F7)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2200 (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 330 (Kanji F2)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 330 (Kanji F7)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 330 (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6100 (PS)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6100 EN (Kanji F7)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6100 N (Kanji F2)	PCL5 and PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS plus Level 2	PCL5 and PCL6	Y
PCL Laser	NEC Laser	NEC MultiWriter 7500PS	PCL5 and PCL6	Y
PCL Laser	NEC Laser	NEC PC-PR3000PS/4	PCL5 and PCL6	Y
PCL Laser	NEC Laser	NEC PC-PR3000PS/4F	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7005w RPS	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7006 RPS	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7006dvw RPS	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7010 PCL5c	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG C7116 PCL5c	PCL5 and PCL6	Y	PCL Laser	NRG Laser	NRG SP C811DN PCL5c	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7416 PCL5c	PCL5 and PCL6	Y	PCL Laser	NRG Laser	NRG SP C820DN	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7425dn PCL5c	PCL5 and PCL6	Y	PCL Laser	NRG Laser	NRG SP C821DN	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7425hdn PCL5c	PCL5 and PCL6	Y	PCL Laser	NRG Laser	NRG SP W2470	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7435n PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE 8445	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7521n PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE 8465	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7528n PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE 9230	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG C7535hdn PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE 9245	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG CC7417	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE 9260	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG D5c224 PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE NC3145 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG D5c232 PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE NC3155 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG D5c328 PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE NC3165 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG D5c332 PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 1055 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG D5c338 PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 1065 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG D5c38 PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 1075 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG D5c38u PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2045 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG P7431cn PCL5c	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2055 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 4100N PCL	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2060 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 4100NL PCL	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2062 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 4110N PCL	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2065 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 4210N	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2070 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 6330N	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2075 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 8100DN PCL	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2090 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 8200DN PCL	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2100 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP 9100DN PCL	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2105	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP C410DN PCL	PCL5 and PCL6	Y	PCL Laser	OCE Laser	OCE VarioPrint 2110 PS3	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP C411DN PCL	PCL5 and PCL6	Y	PCL Laser	Okidata Laser	Okidata B4300 PS	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP C420DN PCL	PCL5 and PCL6	Y	PCL Laser	Okidata Laser	Okidata B4300 PS (MS)	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP C430DN	PCL5 and PCL6	Y	PCL Laser	Okidata Laser	Okidata B4350 PS	PCL5 and PCL6	Y
PCL Laser	NRG Laser	NRG SP C431DN	PCL5 and PCL6	Y	PCL Laser	Okidata Laser	Okidata B4350 PS (MS)	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Okidata	Okidata C5300	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 3050c (PS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C5400 PS	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 3050cV PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C5400 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 5300 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C5400n PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 5400 PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C5450	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 600 PS	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C5700	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 660 PS (PS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C5900	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 700N	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C6100	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 701N3	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7100	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 703N	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7100 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 703N3	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7200	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 7300PS PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7300	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 8c	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7300 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 8cV (PS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7350 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 900PS LT	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7400	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 902PS	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7500	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 903PS	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7500 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 903PS +F	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C7550 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 905 PS +F	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C8800 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 9055c (PS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C8800 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 9055cV PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C9200	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 9300PS PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C9300 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 9500PS PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C9400	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata Microline 9500PS-F PS (MS)	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C9500	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata OKIPAGE8c PS	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C9500 PS (MS)	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata OL1200 /PS PostScript	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata C9600	PCL5 and PCL6	Y	PCL Laser	Okidata	Okidata OL1200e x/PS	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata Microline 2020/N	PCL5 and PCL6	Y	PCL Laser	Panasonic Laser	Panasonic KX-P5400 v2013.112	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata Microline 3010c (PS)	PCL5 and PCL6	Y	PCL Laser	Panasonic Laser	Panasonic KX-P5410 v2013.110	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata Microline 3020c (PS)	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 1022 PS	PCL5 and PCL6	Y
PCL Laser	Okidata	Okidata Microline 3020cV PS (MS)	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 1027 PS	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio AP2600 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL2000 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2600N PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL2000 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2600N PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3000 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2610 PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3000 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2610 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3000e PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2610N PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3000e PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2610N PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3100 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2700 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3100 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP3200 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3500N PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP3800C PCL5c	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL3500N PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP3800C PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL4000DN PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP400 PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL4000DN PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP400 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL4000HDN PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP400N PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL4000HDN PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP400N PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL5000 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP410 PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL5000 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP410 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7000 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP410N PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7000 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP410N PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7100 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP4500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7100 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP4510 PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7200 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP4510 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7200 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP600N PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7300 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP600N PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio CL7300 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP610N PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio Color 5560 PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP610N PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio Color 5560 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP900 PCL	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio MP 1100 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP900 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio MP 1350 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL1000N PCL5c	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio MP 1600 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL1000N PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio MP 161 PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio MP W7140	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 4100N PCL	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2550 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 4100N PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2550B PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 4100NL PCL	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3010 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 4100NL PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3350 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 4110N PCL	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3350B PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 4110N PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 4210N	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 8100DN PCL	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4000B PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 8100DN PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 8200DN PCL	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 8200DN PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5000B PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 9100DN PCL	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP 9100DN PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 6000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C400dn PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 6500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C400dn PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 7000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C410dn PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 7500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C410dn PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 8000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C811DN PCL5c	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 9000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C811DN PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C820DN	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP C821DN	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio SP W2470	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Color Laser AP204 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C4500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Color Laser AP206 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C6000 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Color Laser AP305 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C7500 PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Color Laser AP306 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP W2400	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Color Laser AP306D RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP W3600	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Color Laser AP828 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP W5100	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh DDP70 PS	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh DDP92 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh EMP156 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh FAX5510L/5510N F PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Fiery V3 PRETER 550/500	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Fiery V3 PRETER 650/600	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IMAGIO 530/PJ2	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IMAGIO 530/PJ5	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio C1500PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio C2500PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio C3000PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Color 2800 W28a RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Color 2855 W28a RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Color 3100P-V RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Color 3105P-V RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Color 5100 W51 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Color 5105 W51 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 105Pro RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 2700 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3300W RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3350W RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3500 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3530 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3530e RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3540W RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3550 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3570 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3570e RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 3580W RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 4550 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 4570 RPS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Imagio MF 4570e RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 5550 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 5570 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 6550 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 7070 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF 8570 RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF-P250e RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MF-P355e RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MP 1100PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MP 1350PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MP 6000PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MP 7500PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MP 7500TPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio MP 9000PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 1050Pro PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 220 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 221 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 250 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 270 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 271 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 300 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 350 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 350D PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 351 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 351D PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 352 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 352D PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 353 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 353D PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Imagio Neo 450 PS	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh IPSiO NX650S PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh PC CONTROLLER RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX660S PS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh PC CONTROLLER-10PS II RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX700 RPS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh SP-10PS Pro II / 6F RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX710 RPS	PCL5 and PCL6	Y	PCL Laser	Ricoh Laser	Ricoh SP-10PS Pro II RPS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX720N PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung 6000 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX730N PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung 6100 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX750 PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung 7000 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX760 PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung 7050 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX800 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung 7300 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX810 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP-350 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX850 PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP-550 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX85S PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 6200 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX860e PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 6240 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX900 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 770 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX910 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung CLX - 8380 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX920 PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 1450 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh IPSiO NX96e PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 1650 PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2600 PCL	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2150 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2600 PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2250 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2600N PCL	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2250M PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2600N PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2550 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2610 PCL	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2550S Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2610 PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2570 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2610N PCL	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2850 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Laser AP2610N PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 2855 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh MP C1500/615C PS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 3050 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh NX-1000 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 3470 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh NX-210 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 3550N PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh NX-500 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 3560 Series PS	PCL5 and PCL6	Y
PCL Laser	Ricoh Laser	Ricoh NX-510 RPS	PCL5 and PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 4050 Series PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Samsung Laser	Samsung ML - 4550 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP240D PCL5c	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 6060 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP26DN PCL5c	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 8x00 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP27DN PCL5c	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4725 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP28 PCL5c	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4x20 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP31DN PCL5c	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5835 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP340D	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5935 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP35 PCL5c	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5x 30 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP350D	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6x 20 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP37DN	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6x 22 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP42DN	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6x 45 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin CLP831 PCL5c	PCL5 and PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6x 55 Series PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP145 PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 2404WD	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP150DN PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 2404WDP	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP175n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 2406WD	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP235n	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 4035e PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP25 PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 4045e PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP25n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 4135g PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP26 PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 4145g PS	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP26n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 5100WD	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP28 PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin 7140WD	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP28n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin C2408 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP31n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin C3828 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP31nL PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin CLP128 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP32 PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin CLP131DN PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP35n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin CLP135 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP36n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin CLP1620 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP37n	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin CLP17 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP45 PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin CLP18 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin MLP75n PCL	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin CLP22 PCL5c	PCL5 and PCL6	Y	PCL Laser	Savin Laser	Savin SLP26 PCL	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin SLP26n PCL	PCL5 and PCL6	Y	PCL Laser	Tektronix Laser	Tektronix Phaser 850N	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin SLP38c PCL5c	PCL5 and PCL6	Y	PCL Laser	Tektronix Laser	Tektronix Phaser 8608 by Xerox	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin SP C400DN PCL5c	PCL5 and PCL6	Y	PCL Laser	Tektronix Laser	Tektronix Phaser 860DP by Xerox	PCL5 and PCL6	Y
PCL Laser	Savin Laser	Savin SP C400DN PS	PCL5 and PCL6	Y	PCL Laser	Tektronix Laser	Tektronix Phaser 860DX by Xerox	PCL5 and PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 168D	PCL5 and PCL6	Y	PCL Laser	Tektronix Laser	Tektronix Phaser 860N by Xerox	PCL5 and PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M350N	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 167 PS3	PCL5 and PCL6	Y
PCL Laser	Sindoh Laser	Sindoh LP 5000Hn_5050Hn PS3	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 202L PS3	PCL5 and PCL6	Y
PCL Laser	Sindoh Laser	Sindoh LP 5000Ln_5050Ln PS3	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 203L PS3	PCL5 and PCL6	Y
PCL Laser	Sindoh Laser	Sindoh LP 5000n_5050n PS3	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 207 PS3	PCL5 and PCL6	Y
PCL Laser	Sindoh Laser	Sindoh LP 5000xn_5050xn PS3	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 232 PS3	PCL5 and PCL6	Y
PCL Laser	Source Technologies Laser	Source Technologies ST-9630 PS3	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 233 PS3	PCL5 and PCL6	Y
PCL Laser	Source Technologies Laser	Source Technologies ST-9650 PS3	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 2330c PS3	PCL5 and PCL6	Y
PCL Laser	Source Technologies Laser	Source Technologies ST-9650T PS3	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 237 PS3	PCL5 and PCL6	Y
PCL Laser	Tally Laser	Tally T8024	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 2500c PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 740	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 281c PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 740 Extended	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 282 PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 740 Plus	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 2820C PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 750DP	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 283 PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 750DX	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 2830c PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 750N	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 3500c PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 750P	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 3510c PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 780	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 351c PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 780 Graphics	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 352 PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 780 Plus	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 3520C PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 840	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 353 PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 840 Extended	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 3530C PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 840 Plus	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 451c PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 850DP	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 451S	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 850DX	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 452 PS3	PCL5 and PCL6	Y
PCL Laser	Tektronix Laser	Tektronix Phaser 850DX	PCL5 and PCL6	Y	PCL Laser	Toshiba Laser	Toshiba e - STUDIO 4520C PS3	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 453 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuColor 8000 PS3	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 520 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuColor iGen3 PS3	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 521S	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 420 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 523 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 425 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 5520c PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 426 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 600 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 430 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 603 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 432 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 6520c PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 440 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 6530c PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 460 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 720 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 470 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 723 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 480 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 850 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 490 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 853 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 535 PS	PCL5 and PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 545 PS	PCL5 and PCL6	Y
PCL Laser	Unisys Laser	Unisys UDS640 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre 555 PS	PCL5 and PCL6	Y
PCL Laser	Unisys Laser	Unisys UDS650 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Document Centre CS50 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DC2045 N PS/IPS PS2	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 1000	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DC2060 N PS/IPS PS2	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 100EPS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 2006	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 100EPS PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 2045 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 100N PS PS2	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 2045 PS3 v1.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 115 EPS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 2060 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 115 EPS PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 2060 PS3 v1.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 115 NPS PS2	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 5252 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 135 EPS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 5750 Splash RIP	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 135 EPS PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 5750 w/ Fiery SI	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 135 NPS PS2	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 5750 w/ Fiery XJ	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 155 EPS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 5750 w/ Splash50	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 155 EPS PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 6060 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 155 NPS PS2	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 7000 PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DocuPrint 180 EPS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox DocuPrint 180 EPS PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DP1300 Plus PS3 v1.0	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 350	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DP900 Plus PS3 v1.0	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 425	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DT6100 PS3 v2.0	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 4512 PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DT6115 PS3 v2.0	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 500	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DT6135 PS3 v2.0	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 525/1050 CF	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DT6155 PS3 v2.0	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 65 PS3 v3.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DT6180 PS3 v2.0	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 700	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox DXP 250 PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 75 PS3 v3.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Global Print Driver PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 850	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox GPD PS V2.1	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 90 PS3 v3.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox MajestiK w/ Fiery SI RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 92C N PS PS2	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox MajestiK with Cyclone RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N24	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox MajestiK with DocuPress RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2825 PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox MajestiK with Fiery XJ RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N3225 PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox MajestiK with Splash RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N40	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Nuvera 100 DC/P PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N4025	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Nuvera 100 DPS PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N4025 PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Nuvera 120 DC/P PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N4525	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Nuvera 120 DPS PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 6100	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Nuvera 144 DPS PS3	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 6115	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 1235 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 6135	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 2135 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 6155	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 3400 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 6180	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 3450 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 65 PS3 v3.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 4500B PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 75 PS3 v3.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 4500DT PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 90 PS3 v3.0	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 4500DX PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 128 HLC PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 4500N PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 155 HLC PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 5400 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuTech 180 HLC PS3	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 5500B PS	PCL5 and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox Phaser 5500DN PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7400DN PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 5500DT PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7400DT PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 5500DX PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7400DX PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 5500N PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7400DXF PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6100	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7400DXF PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6120	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7750B PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6120 PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7750DN PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6130N PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 7750GX PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6180DN PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 790	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6180MFP-D PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8200B	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6180MFP-N PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8200DP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6180N PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8200DX	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6200B	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8200N	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6200DP	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8400B PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6200DX	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8400BD PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6200N	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8400DP PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6250B PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8400DX PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6250DT PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8400N PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6250DX PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8500N PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6250N PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8550DP PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6300DN PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8550DT PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6300N PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Phaser 8550DX PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6350DP PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Regal with Cyclone RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6350DT PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Regal with DocuPress RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6350DX PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Regal with Fiery SI RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7300B	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Regal with Fiery XJ RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7300DN	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox Regal with Splash RIP	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7300DT	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox WorkCentre 232 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7300DX	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox WorkCentre 238 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7300N	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox WorkCentre 24	PCL5 and PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox WorkCentre 245 PS	PCL5 and PCL6	Y	PCL Laser	Xerox Laser	Xerox WorkCentre Pro C3545 PS	PCL5 and PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 255 PS	PCL5 and PCL6	Y	PCL Laser	FujiXerox Laser	4150xf	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 265 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 8040	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 275 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 8045D	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre C2424 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 8070	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre M118	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 8080DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre M165 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 8085DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre M20	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 8370	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre M35 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 9010CN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre M45 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 9040CN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre M55 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 9042	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 133	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother DCP - 9045CDN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 165 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 4040CDN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 175 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 4040CN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 232 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL05250DTN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 238 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 1270N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 245 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 1470	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 255 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 1470N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 265 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 1650	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 275 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 1660E	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 32 C PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 1670N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 35 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2060	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 40 C PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2150N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 45 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2170W	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 55 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2400Ce	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 65 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2400CeN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 75 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2460	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 90 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2460N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro C2128 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 2700CN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro C2636 PS	PCL5 and PCL6	Y	PCL Laser	Brother Laser	Brother HL - 3040CN	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Brother Laser	Brother HL - 3070CW	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 7440W	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 3260DN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 7820N	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 3260M	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 7840W	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 3260N	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 7860DW	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 3400CN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8220	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 3450CN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8370	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 4050CDN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8380	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 4150	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8440	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 4200CN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8460N	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 4570	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8480DN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5150D	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8840D	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5150DLT	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8840DN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5170DN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8860DN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5170DNLT	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8870DW	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5240	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 8890DW	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5250DN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 9010CN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5250DN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 9120CN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5250DTN	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 9320CW	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5270DB	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 9420CN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5280DW	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFC - 9450CDN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5280DW BR-Script3	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFX - 8880DN	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5340	PCL5 and/or PCL6	Y	PCL Laser	Brother Laser	Brother MFX - 9970	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 5370	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C2058	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050D	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C2380	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050DN	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C2550	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 6050DW	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C2570	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 7050	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C2620N	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 7050N	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C2880	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother HL - 8050N	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C3080	PCL5 and/or PCL6	Y
PCL Laser	Brother Laser	Brother MFC - 7225N	PCL5 and/or PCL6	Y	PCL Laser	Canon Laser	Canon Color imageRUNNER C3080	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Canon Laser	Canon Color imageRUNNER C3100N	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C3170i	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C3200N	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C3220N	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C3380	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C3480	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C3580	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C4080	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C4580	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C5180	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C5181	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C5185	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C5185 PRO	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C5800	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon Color imageRUNNER C6800	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageCLASS 4000	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageCLASS C2100	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageCLASS MF9280Cdn	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS 1110	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS 1125	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS 1135	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C1+	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C6000	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C6000 A - 1100 Server	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C6000 A - 2100 Server	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C6000 A3100 Server	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C7000	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C7000 A - 2000 Server	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Canon Laser	Canon imagePRESS C7000 A - 2100 Server	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C7000 A3000 Server	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imagePRESS C7000 A3100 Server	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 105	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 105+	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 110	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2200	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2200i	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2200P	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2220N	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2270	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2520	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2525	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2530	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2535	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2545	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2800	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2800P	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2870	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 2870NE	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3025	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3030	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3035	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3045	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3180C	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3225	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3230	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3235	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 3245	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Canon Laser	Canon imageRUNNER C6870	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER C6870N	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER C6870U	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER C6880	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER C6880	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER LBP 5970	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER LBP 5975	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER LBP3470	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER LBP3560	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER LBP5460	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER Pro 125VP	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER Pro 150+	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER Pro 150VP	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER Pro 7110VP	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER Pro 7125VP	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER Pro 7138VP	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER Pro 7150VP	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon i - SENSYS LBP6750cn	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 1760e	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 3260	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 3370	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 3460	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 460PS	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 5360	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 5960	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 6650dn	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 6650n	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 6750dn	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP 7750cdn	PCL5 and/or PCL6	Y
PCL Laser	Canon Laser	Canon LBP - 1000	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Canon Laser	Canon LBP - 1760	PCL5 and/or PCL6	Y
PCL Laser	Compaq Laser	Compaq LN21N	PCL5 and/or PCL6	Y
PCL Laser	Compaq Laser	Compaq LN21P	PCL5 and/or PCL6	Y
PCL Laser	Compaq Laser	Compaq LN28A	PCL5 and/or PCL6	Y
PCL Laser	Compaq Laser	Compaq LN28N	PCL5 and/or PCL6	Y
PCL Laser	Compaq Laser	Compaq LNM40 - CA	PCL5 and/or PCL6	Y
PCL Laser	Compaq Laser	Compaq LNM40 - DA	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	CP5525n/dn/xh	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	CS230	PCL5 and/or PCL6	Y
PCL Laser	Datametrics Laser	Datametrics Model 1980	PCL5 and/or PCL6	Y
PCL Laser	Datametrics Laser	Datametrics Model 2180	PCL5 and/or PCL6	Y
PCL Laser	Datametrics Laser	Datametrics Model 3400	PCL5 and/or PCL6	Y
PCL Laser	Datametrics Laser	Datametrics Model 3402	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 2145cn Multifunction Color Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 2335dn Multifunction Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 2350d Mono Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 2350dn Mono Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 2355dn Multifunction Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 3130cn	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 3330dn Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 3333dn Multifunction Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 5130 cdn Color Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 5230dn Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 5230n Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 5350dn Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 5530dn Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 5535dn Multifunction Laser Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 7130cdn Color Printer	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell 7330dn Laser Printer	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Dell Laser	Dell Laser Printer 1130	PCL5 and/or PCL6	Y	PCL Laser	Duplo Laser	Duplo Docucate MD - 551N	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 1130n	PCL5 and/or PCL6	Y	PCL Laser	Duplo Laser	Duplo Docucate MD - 621N	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 1700n	PCL5 and/or PCL6	Y	PCL Laser	Duplo Laser	Duplo Docucate MD - 701N	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 1710	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser 2600N	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 1710n	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser Aculaser M8000	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 1720	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C1900	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2150cn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C1900PS	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2155cn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C2000PS	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 3000cn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C2000PSDT	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 3100cn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C2600N	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 3110cn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C2800N / DN	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 3110n	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C3800	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 3115	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C3900	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 5100cn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C4100	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 5110cn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C4200	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 5210n	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C8500	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 5310n	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C8500DT	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 5330dn	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C8500PS	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer m5200	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C8500PSDT	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell MFP Laser Printer 1600n	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C8600	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Dell Multifunction Laser	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C8600PS	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	DocuPrint M255df	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C8600PSDT	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	DocuPrint M255z	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C9100	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	DocuPrint P255dw	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser C9200	PCL5 and/or PCL6	Y
PCL Laser	Duplo Laser	Duplo Docucate CD - 2501N	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson AcuLaser ColorStation C8600+	PCL5 and/or PCL6	Y
PCL Laser	Duplo Laser	Duplo Docucate MD - 168D	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson Aculaser CX16	PCL5 and/or PCL6	Y
PCL Laser	Duplo Laser	Duplo Docucate MD - 231	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson Aculaser CX21N	PCL5 and/or PCL6	Y
PCL Laser	Duplo Laser	Duplo Docucate MD - 271	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson Aculaser CX24	PCL5 and/or PCL6	Y
PCL Laser	Duplo Laser	Duplo Docucate MD - 351N	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson Aculaser CX28	PCL5 and/or PCL6	Y
PCL Laser	Duplo Laser	Duplo Docucate MD - 451N	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson Aculaser M2000D	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Epson Laser	Epson Aculaser M2000DN	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N2550	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson Aculaser M4000D	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N2550DT	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson AL - M2300	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N2550T	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson AL - M2310	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N2700 PS3	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson AL - M2400	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N2750	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson AL - M2410	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N2750DT	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson AL - MX20	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N2750PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson AL - MX21	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N3000	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 3000 EPSONScript	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N4000 PS3	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 5700 EPSONScript	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N4000+ PS3	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 5800	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson EPL - N7000	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 5800N	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX Able Model - PR v2017 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 5800PS	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX Able Model - PR II F/PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 5900	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX AP C5540 I PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 5900N	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX AP C6550 I PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 5900PS	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DC 250 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 6100	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DC 350 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 6100PS	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DC 400 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - 6200	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DC 450 CP PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - C8200 PS3	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DC 450 CP PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N1600	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DC C5540 I PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2000/A4 EPSONScript	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DC C6550 I PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 1100 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050 PS3	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 156 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050+	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 186 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050D+	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 235 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050DT+	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 236 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050PS	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 285 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050PS+	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 286 PS	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson EPL - N2050T	PCL5 and/or PCL6	Y	PCL Laser	Epson Laser	Epson FX DMC 355 PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Epson Laser	Epson FX DMC 405 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 450	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC 506 CP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 550	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC 606 CP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 650	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC 706CP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 750	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC 900 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C2200	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C240 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C2521	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C250 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C3300	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C250 PS C	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C3626	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C320 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C4300	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C360 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C4535	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C360 PS C	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C5540	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C400 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C6550	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C450 PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort C7550	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DMC C450 PS C	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox ApeosPort - III 4000	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DP 205 - AP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DoceCentre III C4100	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DP 240A - AP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocPrint C2255	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DP 255 - AP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocPrint C3055	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DP 305 - AP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 1055	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson FX DP 340A - AP PS	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 1085	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson LP - 3000PS F2 v52.3	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 155	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson LP - 8300CPD	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 185	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson LP - 8700PS3	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 230	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson LP - 9200PS3	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 250	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson LP - 9700PS3	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 251	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson MX20DN	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 280	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson Offrio LP - M6000 (LP - S6000)	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 350	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson Offrio LP - M7500 (LP - S7500)	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 351	PCL5 and/or PCL6	Y
PCL Laser	Epson Laser	Epson Offrio LP - M7500f	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 352	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox 3017	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 400	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort 350	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 401	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 402	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 450	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 451	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 505	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 507	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 507-MD	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 550	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 551	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 559	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 605	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 607	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 650	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 659	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 705	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 707	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 719	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 750	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C2100	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C2200	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C2521	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C3300	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C3626	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C4300	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C4535	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C5540	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C6550	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C7550 1 PSH	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C7550 PH	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre Color 320	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre Color 400	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre Color f250	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre Color f360	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre Color f450	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f1100	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f235	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f285	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre f900	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre IV C3370 (ApeosPort) / C3371	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II 2005	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II 2055	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II 3005	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II C5400	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II C6500	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II C7500	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (ApeosPort - III) 3010	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (ApeosPort - III) 4000	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (ApeosPort - III) 5000 (5400)	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (ApeosPort - III) 6000 (6500)	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (ApeosPort - III) 7000 (7500)	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (ApeosPort - III) 9000	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (Apeos-Posrt - III) C2205	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (Apeos-Posrt - III) C3305	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (Apeos-Posrt - III) C4405	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (Apeos-Posrt - III) C5500	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (Apeos-Posrt - III) C6500	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III (Apeos-Posrt - III) C7600	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III 2007	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 401	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - III 3007	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 4050	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - IV (Apeos-Posrt - IV) C5580	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 4060	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - IV (Apeos-Posrt - IV) C6680	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 5060	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - IV (Apeos-Posrt - IV) C7780	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 92c	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 1256 GA (1257 GA)	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 96	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 4055 P	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C1190 FS	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 5000AP	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C1616	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 5000AP	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2120	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 5000AP	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2200	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 5000AP	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2424	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 5065 II	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2426	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 5151	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C2428	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 6075 II	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3140	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 6075 II	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3200A	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 7000 Diccigital Press	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3210DX	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 7000 Diccigital Press	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3290	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuColor 7000 Diccigital Press	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3290 FS	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C2101 / C1101	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3300 DX	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 115	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C3540	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 135	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C4350	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 2020	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C5005	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 203A	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C5005d	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 204A	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C525A	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 205	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C525AFS	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 2060	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C5450	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuPrint 2065	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C6835	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	Fujixerox DocuPrint 255	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C6835 Lite	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	Fujixerox DocuPrint 3055	PCL5 and/or PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint CM305	PCL5 and/or PCL6	Y
					PCL Laser	FujiXerox Laser	FujiXerox DocuPrint CP305D	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	FujiXerox Laser	FujiXerox DocuTech 6180 Production Publisher	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox FX 4112	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox FX 4127	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox FX4110EPS	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox FX4590EPS	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 3125N	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 3160n	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 3200 MFP	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 3428	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 3435	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 3435dn	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 4510	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 5500N	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 5550	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 6360N / 6360DN / 6360DT / 6360DX	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 7760	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 8560	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox Phaser 8560MFP N / 8560MFP DN / 8560MFP DT / 8560MFP DX	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox WorkCentre 3210	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox WorkCentre 3220	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox WorkCentre 3220	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox workCentre 4250	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox WorkCentre 4250c / s / x / xf	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox WorkCentre 518 - II	PCL5 and/or PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox WorkCentre 520	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 12/1200N	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 12/600	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 12/600N	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	GCC Laser	GCC Elite 21DN	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 21DN+	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 21N	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 21N+	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 21SE	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 26DN	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite 26N	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite XL20/1200	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite XL20/600	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite XL20/800	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite XL40DN	PCL5 and/or PCL6	Y
PCL Laser	GCC Laser	GCC Elite XL40N	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 10502 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 10512 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 2212 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 2712 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 32105 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3212 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3215s PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3218 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3222 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3227 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3235 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3235e PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3235s PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3245 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3245e PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3255 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3265 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 3285 PS	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Gestetner Laser	Gestetner DSm730 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner MP9000/DSm790 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm735/735G PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner MPC1500/GS106 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm745/745G PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner MPC2000/DSc520 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner F9199/9199nf PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner MPC2500/DSc525 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 161/DSm416 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner MPC3000/DSc530 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2510/DSm725e PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner MPC3500/DSc535 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2550 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner MPC4500/DSc545 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2550B PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7026 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3010/DSm730e PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7026n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3350 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7027 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3350B PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7031n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 4000 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7031nL PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 4000B PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7032 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 5000 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7035n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 5000B PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7045 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 6000 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7126 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 7000 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7126n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 8000 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7132n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C6000 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7145 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C7500 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7245 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1100/DSm7110 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7325 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1350/DSm7135 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7325n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1600/DSm716 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7431cn PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP2000/DSm721d PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7527 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP2500/DSm625 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7527n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP3500/DSm735e PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7535n PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP4500/DSm745e PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7575 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP5500/DSm755 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7675 PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP6500/DSm765 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP 8200DN PS	PCL5 and/or PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP7500/DSm775 PS	PCL5 and/or PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP C420DN PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	HP Laser	HP LaserJet Pro 400 M401	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet 9500mfp	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Pro M275	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CM1312 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP CLJ CP5525dn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CM2320 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP CLJ CP5525n	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CM6030 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP CM8050	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CM6040 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP CM8060	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP1510	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2500L	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP1515n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2500n	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP1518ni	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2500tn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP1525	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2550L	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP2025	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2550Ln	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP2025n/dn/x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2550n	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP3525dn / n / x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2605 / dn / dtn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP4025dn / n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2700	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP4525dn / n / xh	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2820	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP6015	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2840	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet Pro CP1525nw	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 3000 /n / dn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet Pro CP5225	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4650n	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 1200n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4700 /n / dn / dtn / ph+	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 1220	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4730 mfp / x mfp / xm mfp / xs mfp	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 1300	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5500	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 2200dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5500dn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 2300	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5500dtn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 2300L	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5500hdn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 2420	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5500n	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 2430	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5550 /n / dn / dtn / hdn	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 3015	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 8550	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 3020	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 8550mfp	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 3030	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 9500	PCL5 and/or PCL6	Y	PCL Laser	HP Laser	HP LaserJet 3050	PCL5 and/or PCL6	Y
					PCL Laser	HP Laser	HP LaserJet 3052	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	HP Laser	HP LaserJet 3055	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3200m	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3300mfp	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3310	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3320	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3320n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3330	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3380	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3390	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 3392	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4015dn/x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4100	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4100dtn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4100mfp	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4100n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4100tn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4101mfp	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4200	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4240 / n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4250 / n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4300	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4345mfp	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 4350 / n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5000n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5100 / tn / dtn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5200 / tn / dtn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9040 / n / dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9040mfp	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9050 / n / dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet 9050mfp	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	HP Laser	HP LaserJet CM1015	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet CM1017	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet CM3530 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet CM4540	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet CM4540f/fskm	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet CP3505/CP3505dn/ CP3505n/CP3505x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet CP4005	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprice CP4525dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprice CP4525n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise 500 Color M551n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise 600 M601dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise 600 M601n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise 600 M602dn/x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise 600 M602n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise 600 M603dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise 600 M603n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Enterprise P3015 / d / dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M1522 / 1522nf / 1522 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M2727 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M3027 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M3035 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M4345 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Laserjet M4345x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M4555i/fskm	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M4555h	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M5025 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M5035 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M9040 MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet M9050 MFP	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	HP Laser	HP LaserJet P1606dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P1606n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P2035	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P2035n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P2055d /dn / x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P2055dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P3005	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P3015dn	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P3015x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P4014	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P4014n	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P4015	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P4515	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet P4515dn/x	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Pro 100 M175a	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Pro 100 M175nw	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Pro CM1415FNW Color MFP	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Pro M1536	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP LaserJet Pro M1536dnf	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM C540 n / dn	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM C543 n / dn	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM EMP156	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 100	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1120	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1120d	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1120dn	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1120n	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1125	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1125dn	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	IBM Laser	IBM Infoprint 1125n	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1130	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1130dn	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1130in	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1130n	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1140	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1140dn	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1140in	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1140n	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1145	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1145dn	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1145n	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1226	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1332	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1352	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1372	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1410 MFP	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1422	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1512	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1512n	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1532 Express	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1532 MICR 35	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1540	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1552	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1560	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1570	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1572	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1572 MICR 50	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1580	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 1585	PCL5 and/or PCL6	Y





Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	IBM Laser	IBM InfoPrint Color 1764	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4353 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1764 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4451 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1767	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4452 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1769 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4550 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1824	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4551 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1824	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4651 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1825	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4700 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1826 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4850 MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1826 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec 4850e MF PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1834	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IP 280 PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1836 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 1036 PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1846 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 2525 PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1854	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 2525DN PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1856 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 2525e PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM InfoPrint Color 1866 MFP	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 2832 PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Pro 1107	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 2838 PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Pro 1107 EX	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 3030DN PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Pro 1357	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 3535 PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Pro 1357 EX	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 3535e PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Pro 907	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IPC 4040DN PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Pro 907 EX	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2015 PS	PCL5 and/or PCL6	Y
PCL Laser	IBM Laser	IBM Pro C900	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2018 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4105 MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2018D PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4105e MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2022 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4150 MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2027 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4180 MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2032 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4220 MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2035 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4270 MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2045 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4351 MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2055 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec 4352 MF PS	PCL5 and/or PCL6	Y	PCL Laser	Infotec Laser	Infotec IS 2060 PS	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Infotec Laser	Infotec MP 7000 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 8000 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C6000 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C7500 PS	PCL5 and/or PCL6	Y
PCL Laser	Infotec Laser	Infotec P 450 PS	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster 9110	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster 9150i	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster E125	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster E150	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster EX110	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster EX125	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster EX138	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster EX150	PCL5 and/or PCL6	Y
PCL Laser	Kodak Laser	Kodak Digimaster EX300	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica KL - 3015	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica KL - 3015N	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica KL - 3015N+	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 1135C	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta 1145C	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 20 / 20P	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 200	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 223	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 230	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 240f	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 250	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 280	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 283	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 350	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 360	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 361	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 363	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 40P / 40PX	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 420	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 421	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 423	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 43	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 500	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 501	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 502	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 552	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 600	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 600RM	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 601	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 602	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 652	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 7085	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 7145	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 7222	PCL5 and/or PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta bizhub 7228	PCL5 and/or PCL6	Y













Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier LD - 175 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP175/LP175hdn PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 225 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP222cn/LP221c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 228c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP226c/SP C410 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 230 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP231c/SP C411 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 232c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP235c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 235 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP331cn/SP C420 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 238c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP332c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 245 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP335c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 328c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier LP440c/SP C811DN PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 335c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 1100/LD - 1100 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LD - 345c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 1350/LD - 1135 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LF510/515e PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 1600/LD - 316 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP020c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 161/LD016 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP025/LP026 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 2000/LD - 320d PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP025N/LP026N PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 2510/LD - 325 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP031c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 2550/LD - 425 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP032 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 2550B/LD - 425B PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP036c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 3010/LD - 330 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP116c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 3350/LD - 433 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP122c/LP121c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 3350B/LD - 433B PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP125cx/LP126cn PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 3500/LD - 335 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP127n/LP128n PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 4000/LD040 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP128 PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 4000B/LD040B PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP131n PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 4500/LD - 345 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP131nL PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 5000/LD050 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP135n PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 5000B/LD050B PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP136n PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 5500/LD - 255 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP138c PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 6500/LD - 265 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP145n/SP 8100DN PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 7000/LD - 270 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier LP150dn/SP8200DN PS	PCL5 and/or PCL6	Y	PCL Laser	Lanier Laser	Lanier MP 7500/LD - 275 PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier MP 8000/LD - 280 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 9000/LD - 190 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2000/LD - 420c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2500/LD - 425c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C3000/LD - 430c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C3500/LD - 435c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C4500/LD - 445c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C6000/LD - 260c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C7500/LD - 275c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MP2500/LD - 125 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier MPC1500/LD - 215c PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4100N PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4110N PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 9100/LP275 PS	PCL5 and/or PCL6	Y
PCL Laser	Lanier Laser	Lanier SP C400DN PS	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo C8300N	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo C8700DN	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo LJ2250	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo LJ2250N	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo LJ2650DN	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo LJ3600D	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo LJ3650DN	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo LJ3900DN	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo LJ7800N	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo M7260	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo M7650DNF	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo M7900DNF	PCL5 and/or PCL6	Y
PCL Laser	Lenovo Laser	Lenovo MC8300DN	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C510	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C510n	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark C520n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C522n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C524dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C524dtn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C524n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C530dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C532n / C532dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C534n/ C534dn / C534dtn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C540 n / dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C543 n / dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C544 dn / dtn / w / n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C546 dn / dtn / w / n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C734n / dn / dtn / dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C736n / dn / dtn / dw (CS736)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C750	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C750dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C750n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C752	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C752dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C752dtn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C752fn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C752n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C760	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C760dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C760n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C762	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C770	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C770n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C772	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark C772e	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E323	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C772n / x772 MFP	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E323n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C780n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E330	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C782n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E332n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C782n XL	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E340	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C792	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E342n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C910	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E350d / E352dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C910dn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E360 n / dn / dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C910n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E450dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C912	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E460 n / dn / dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C912dn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark E462 n / dn / dw / dtn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C912fn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra Color 45	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C912n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra Color 45n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C920	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra E312	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C920dn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark Optra T616	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C920dtn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T420d	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C920n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T420dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C925	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T430	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C935dn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T620	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark CS796de	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T620dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E120n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T620in	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E220	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T620n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E240	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T622	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E240n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T622dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E240t	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T622in	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E250d / E250dn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T622n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E260 n / dn / dw	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T630	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E321	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark t630 VE	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E322	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T630dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E322n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark T630n	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark T632	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W812	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T632dtn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W812dtn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T632dtnf	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W812tn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T632n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W820	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T632tn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W820dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T634	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W840	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T634dtn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W840dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T634dtnf	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W840n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T634n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark W850dn / n	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T634tn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X203	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T640	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X204	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T640dn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X264dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T640dtn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X363dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T640n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X364dn / X364dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T640tn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X422 MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T642	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X463de	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T642dn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X464de	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T642dtn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X466de / X466dew (XS463)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T642n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X544dn / dtn / dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T642tn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X546dn / dtn / dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T644	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X560n / dn	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T644dtn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X632 MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T644n	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X632e	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T644tn	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X632s MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T650	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X634dte MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T652 (dn / dtn / n) / TS652	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X634e MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T652 (dn / dtn / n) / TS652	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X642e	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T654 (dn / dtn / n) (TS654)	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X644e	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T656 (dn / dtn / n) / TS656	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X646dte / Clinical Assistant	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark TS656	PCL5 and/or PCL6	Y	PCL Laser	Lexmark Laser	Lexmark X646e	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark X651 / X652 (d / dn / dtn) (XS651)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X734n / dn / dtn / dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X736n / dn / dtn / dw	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X738	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark x762e MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X782e	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X782e XL	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X792	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X830e MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X832e MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X850e (XM850)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X852e (XM852)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X854e (XM854)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X860de	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X862de 4 / XS862	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X864de 3/4 / XS864	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X912e MFP	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X925 / XS925	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X940e (XC940)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X945e (XC954)	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark XS796	PCL5 and/or PCL6	Y
PCL Laser	Lexmark Laser	Lexmark XS860	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	M551dn/xh	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di200	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di2000	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di251	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di2510	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di251f	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di3010	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Minolta Laser	Minolta DiALTA Di351	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di3510	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di351f	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di450	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di470	PCL5 and/or PCL6	Y
PCL Laser	Minolta Laser	Minolta DiALTA Di550	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 2560BX	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 2560EX	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS 2560FX	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2200 DP	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2200 EN	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2200 GN	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2200 N	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 2210 GN	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 3100	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 330EX	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6100 DP	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6100 EN	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6100 EP	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6100 N	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS magicolor 6110 GN	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS PagePro 1250E	PCL5 and/or PCL6	Y
PCL Laser	Minolta - QMS Laser	Minolta - QMS PagePro 9100	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 1300	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 1700	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 2010	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 2550	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 2570	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 2590	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 3050	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Muratec Laser	Muratec MFX - 3550 Pro Ed	PCL5 and/or PCL6	Y	PCL Laser	NEC Laser	NEC ITC45C4	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 3600	PCL5 and/or PCL6	Y	PCL Laser	NEC Laser	NEC Multina 2040	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 4550	PCL5 and/or PCL6	Y	PCL Laser	NEC Laser	NEC Multina 2540	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 4555	PCL5 and/or PCL6	Y	PCL Laser	NEC Laser	NEC Multina 3540	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - 5555	PCL5 and/or PCL6	Y	PCL Laser	NEC Laser	NEC MyOffice C520	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - C2500 PE	PCL5 and/or PCL6	Y	PCL Laser	NEC Laser	NEC NEFAX 797	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - C2700	PCL5 and/or PCL6	Y	PCL Laser	NEC Laser	NEC ViVid Office 2020	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - C3400	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 10505/10508/10502 PS	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec MFX - C4000 PE	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 10515/10518/10512 PS	PCL5 and/or PCL6	Y
PCL Laser	Muratec Laser	Muratec V - 2525C	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 2205/2238/2212 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT2530	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 2705/2738/2712 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT25C2	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 3205/3238/3212 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT25C3	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 3525/3508/3502 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT25C5	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 3545/3518/3532 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT2840D	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 4525/4508/4502 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT28C6	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 4545/4518/4532 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT3530	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 5505/5508/5502 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT35C3	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 6002/6005/6008 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT35C5	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 7502/7505/7508 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT3640D	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 8505/8508/8502 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT36C6	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG 9005/9008/9002 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT45C1	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7010 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT45C6	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7116 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT5035	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7416 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT5050	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7417 PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT5200	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7425dn PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT6030	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7425hdn PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT6200	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7435n PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT8030	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7521n PS	PCL5 and/or PCL6	Y
PCL Laser	NEC Laser	NEC IT8200	PCL5 and/or PCL6	Y	PCL Laser	NRG Laser	NRG C7528n PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG C7535hdn PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG CS555 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 4105/28105/32105 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 415s/2815S/3215s PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 418/2818/3218 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 422/2822/3222 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 427/2827/3227 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 435/2835/3235 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 435s/2835S/3235s PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 445/2845/3245 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 455/2855/3255 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 465/2865/3265 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D - 485/2885/3285 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D555/2955/3355 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG D570/2970/3370 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc224 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc232 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc328 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc332 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc338 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc38 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc38u PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc424 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc428 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc432 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc435 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc445 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSc460 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm415 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm615 PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG DSm616 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm618 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm618d PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm620 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm620d PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm622 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm627 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm632 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm635 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm645 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm651 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm660 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm675 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm725 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm730 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm735 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG DSm745 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 1100 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 1350 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 1600 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 161 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 2000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 2500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 2510 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 2550 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 2550B PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 3010 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 3350 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 3350B PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 3500 PS	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG MP 4000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 4000B PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 4500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 5000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 5000B PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 5500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 6000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 6500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 7000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 7500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 8000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP 9000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C1500sp PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C2000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C2500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C3000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C3500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C4500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C6000 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG MP C7500 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7026 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7026N PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7027 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7032 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7045 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7126 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7126N PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7132N PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7325 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7325N PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG P7431cn PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7527 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7527n PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7535n PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG P7575 PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP 4100N PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP 4100NL PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP 4110N PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP 8100DN PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP 8200DN PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP 9100DN PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP C410DN PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP C411DN PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP C420DN PS	PCL5 and/or PCL6	Y
PCL Laser	NRG Laser	NRG SP C811DN PS	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE 3145	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE 3145E	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE 3155	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE 3155E	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm2510	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm2520 MFP	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm2522	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm3120	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm3520	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm3521	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm3522	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm3530	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm4010	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm4520	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm4521	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	OCE Laser	OCE cm4530	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE fx2100	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm5520	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE fx3000	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cm6520	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im2020	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ColorStream 1000	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im2330	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CPS 171	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im2520	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CPS 700	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im2520f	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CPS 800 (Platinum)	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im2521	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CPS 900 (Platinum)	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im2830	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS171	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im3510	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS172	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im3511	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS180	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im3512	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS231	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im3520	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS240	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im3530	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS250	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im4510	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS520	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im4511	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS520Pro	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im4512	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS550	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im4530	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS620	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im4720	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS650	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im5520	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS655 Pro	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im5530	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE CS665 Pro	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im6020	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE cx2100	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im6030	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE DL650	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im7230	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ES3640a3	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im7520	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ES4140	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im8130	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ES5460	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im8530	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ES6150	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE im9220	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ES6410	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE ix2700	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ES7411	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE ix2701	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE ES8430	PCL5 and/or PCL6	Y	PCL Laser	OCE Laser	OCE ix3010	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	OCE Laser	OCE MFC8880DN	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE MP1020	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE MP1025	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE MP1035	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE MP1045	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE MP1050	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE MP1075	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE sx2100	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 3550p	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 2221	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 2222c	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 2622c	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 2650cp	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 2821	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 2822c	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 3050cp	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 3200x	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 3622	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 3622c	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 4222	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 4522c	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 4550p	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 5022	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 5522c	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 6022	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 6522c	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 7522	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioLink 9522	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 1055 / VarioPrint 1055BC / VarioPrint 1055DP	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	OCE Laser	OCE VarioPrint 1065	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 1075	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 1105	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2045	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2050	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2055	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2060	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2062	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2065	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2070	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2075 / VarioPrint 2075DP	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2090 Titanium	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2100 Titanium	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2105 Printer / Copier	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2105 Production Printer	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 2110 Titanium	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 3070	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 3110	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 4110	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 4120	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 5115	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 5140	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 5160	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 6160	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 6200	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint 6250	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioPrint VarioPrint 3090	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioStream 7000 Family	PCL5 and/or PCL6	Y
PCL Laser	OCE Laser	OCE VarioStream 8000 Family	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	OCE Laser	OCE VarioStream 9000 Family	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B - 2540	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B410d/dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B411d / dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B420dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4300	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B430dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B431d / dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4350	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4500	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4540 mfp	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4545	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4545 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4550	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B4600	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B6200	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B6250	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B6300	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B6500	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B710 n/dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B720 n/dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B730 n/dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B8300n	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B840	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata B930n / B930dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C130n	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C330dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C3600	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5300n	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5300n CCS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Okidata Laser	Okidata C530dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5400	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5450 mfp	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5450dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5450n	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5540 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5550 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5550N	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5700n / dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5750n / dn (es2232a4)	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5900n / dn / dtn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C5950n / dn / dtn / cdtn (es2632a4)	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C6000n / dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C6050n / dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C6100n / dn / dtn / hdn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C610n / dn / dtn (ES6410)	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C6150n / dn / dtn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C710 n / dn / dtn (es3032a4)	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C711n / dn / dtn (ES7411)	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C7350 / C7550	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C7350dtn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C7350hdn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C7350n	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata c7550hdn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata c7550n	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C810 / C830	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C821dn	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata C8800n (es2632a3)	PCL5 and/or PCL6	Y
PCL Laser	Okidata Laser	Okidata c9300	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Okı Laser	Okı c9300dxn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9300dxn color signage	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9300n	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9500dxn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9500dxn color signage	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9500dxn pro studio	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9800dn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9600hdn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9600hdtn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9600n	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9600n Color Signage	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı C9650n / dn / hdn / hn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı C9655n / dn / hdn / hn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı c9800hdn / hdtn / hn - es3640ex / e / exGA	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı C9850 hdn / hdtn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı CX1145 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı CX2032	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı CX2033 MFP (MC560n & ES5460 MFP)	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı CX2540 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı CX2640 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı CX3641	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı CX3641 MFP (es3640a3)	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES11406n	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES11406nCCS	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES1220	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES1624n MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES3640a3	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES4131dn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES4140	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Okı Laser	Okı ES4180 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES6150dn	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES7120	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES7130	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES8140	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES9130	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı ES9410	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MB - 290 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MB470 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MB480 MFP	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MB780	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MC361 (MC351) (ES3451)	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MC561 (CX2731) (ES5430) (ES5461)	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MC860 (CX2633) (ES8460dn)	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 1032 PS	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 1035 PS	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 1055 PS	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 18NR	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 2030N	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 22NR	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 5300	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 5400	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı Microlıne 7300PS	PCL5 and/or PCL6	Y
PCL Laser	Okı Laser	Okı MX560n MFP Plus / CX2033 MFP Plus	PCL5 and/or PCL6	Y
PCL Laser	Panasonic Laser	Panasonic DP - C266	PCL5 and/or PCL6	Y
PCL Laser	Panasonic Laser	Panasonic DP - C306	PCL5 and/or PCL6	Y
PCL Laser	Panasonic Laser	Panasonic DP - C406	PCL5 and/or PCL6	Y
PCL Laser	Panasonic Laser	Panasonic FP - D - 250	PCL5 and/or PCL6	Y
PCL Laser	Panasonic Laser	Panasonic FP - D - 350	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Panasonic Laser	Panasonic Workio DP - CL18	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2035	PCL5 and/or PCL6	Y
PCL Laser	Panasonic Laser	Panasonic Workio DP - CL22	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2035e	PCL5 and/or PCL6	Y
PCL Laser	Panasonic Laser	Panasonic Workio KX - CL400	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2045	PCL5 and/or PCL6	Y
PCL Laser	Dell Laser	Printer 1815dn	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2045e	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1013	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2051SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1015	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2060SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1018	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2075SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1022	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2090	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1027	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2105	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1032	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 220	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1035	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2228C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1045	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2232C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1060	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 2238C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1075	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 270	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1224C	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3025P	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1232C	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3025SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 150	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3025SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 180	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3025SPi	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2015	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3030P	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2016	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3030SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2016spf	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3030SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2018	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3030SPi	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2018D	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3035SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2020	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3035SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2020D	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3035SPi	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2020Dspf	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3045SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2020spf	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3045SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2022	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3045SPi	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2027	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3224C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2032	PCL5 and/or PCL6	Y	PCL Laser	Ricoh Laser	Ricoh Aficio 3228C	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio 3235C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3245C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3260C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 615c	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP3200	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP410N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP4510	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP610N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP900	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio C2000 SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL1000N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL2000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL2000N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL3000e	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL3500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL4000DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL5000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL7200	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL7300	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio Color 3131	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio Color 3232	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio Color 5560	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio Color 5560V	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio Color 6513	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 1600 / 1600spf	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2000 / 2000spf	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2500 SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2510	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2510P / 2510SP / 2510SPF / 2510SPi	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2550	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2550B	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2851	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3010	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3010P / 3010SP / 3010SPF / 3010SPi	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3350	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3350 SFP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3350B	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3351	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 3500P / 3500SP / 3500SPF / 3500SPi	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4000B	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4000SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4001	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 4500P / 4500SP / 4500SPF / 4500SPi EFI	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5000B	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5000SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5001	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5500SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 6000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 6001	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 6500SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 7000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 7001	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 7500SP	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wireld/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio MP 8000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 8001	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 9001	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C1500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2030	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2050	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2051	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2500 EFI	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2530	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2550	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2551	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2800	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C300	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3000 EFI	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3001	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3300	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3500 EFI	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C3501	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C400	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C4000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C4500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C4500 EFI	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C4501	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C5000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C5501	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C6000	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wireld/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio MP C6001 / C6501SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C7500	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C7501	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C7501SP	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP1100	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP1350	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP161SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP171SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP201	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP900	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 3200SF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 3300D / DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 3400N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 3400SF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 3410DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 3410SF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 4100 (KP)	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 4110	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 4210	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 5100	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 6330N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 8100DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 8200	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 9100DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C222N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C222SF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C231 / SP C232	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C231SF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C232SF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C311N	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wireld/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio SP C312DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C320	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C400dn	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C410dn (KP)	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C411dn	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C420	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C4200	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C430	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C431 / DN - HS	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C811	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C811DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C811DN - T1 / SP C811DN - T3	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C820	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C821	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP1600	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP1610	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP1610N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP2100	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP2600	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP2600N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP2610	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP2610N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP2700	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP3800C	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP3800C/D	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP3800C/DL	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP3800C/DT	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP3800CMF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP3850C	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wireld/Wireless
PCL Laser	Ricoh Laser	Ricoh AP3850C/D	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP3850C/DT2	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP400N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh AP600N	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL3000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL3000DN	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL7000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL7000/D	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL7000/DL	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL7000/DT	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL7000CMF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh CL7100	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh DDP184	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh DDP70e	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh DDP92	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh EMP100	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh EMP156	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh FAX4420NF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh FAX4430NF / L	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh MP 201SPF	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Priport CX4640PD	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Priport HQ7000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Priport HQ9000	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 1106EX	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 1107	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 1107 EX	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 1356EX	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 1357	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 1357 EX	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 906EX	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Pro 907	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 5990 / A4 Scanstation V3	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro 907 EX	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 6890	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro C550EX	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 6890X	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro C700EX	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 6990	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro C720	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9323	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Pro C900 / C901	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9325	PCL5 and/or PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Ricoh Aficio MP1350	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9327	PCL5 and/or PCL6	Y
PCL Laser	Riso Laser	Riso ComColor 3010	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9331	PCL5 and/or PCL6	Y
PCL Laser	Riso Laser	Riso ComColor 3050	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9535	PCL5 and/or PCL6	Y
PCL Laser	Riso Laser	Riso ComColor 7010	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9545	PCL5 and/or PCL6	Y
PCL Laser	Riso Laser	Riso ComColor 7050	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9625	PCL5 and/or PCL6	Y
PCL Laser	Riso Laser	Riso ComColor 9050	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9626	PCL5 and/or PCL6	Y
PCL Laser	Riso Laser	Riso HC5500	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9631	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem LaserPro 348	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9735	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem LaserPro 351	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9745	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem LaserPro 356	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem MF 9841	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem LaserPro 358	PCL5 and/or PCL6	Y	PCL Laser	Sagem Laser	Sagem/Philips MF 6080	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 3680	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung ML - 1865W	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 3725	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung 4510ND	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 3760	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 320	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 3780	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 320N	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 4591	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 350	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 4661	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 550	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 4690	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 550N	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 5481n	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 610ND	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 5591	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 620ND	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 5660	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 620ND	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 5680	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 650 / 650N	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 5690	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 660ND	PCL5 and/or PCL6	Y
PCL Laser	Sagem Laser	Sagem MF 5890	PCL5 and/or PCL6	Y	PCL Laser	Samsung Laser	Samsung CLP - 670ND	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Samsung Laser	Samsung CLP - 770DN	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 6200FX	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 6210FX	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 6220	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 6240FX	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 6250	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 7285	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 7335	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 7455	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 8380ND / MultiXpress C8380ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 9023	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 9028	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 9035	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MFX - C4000	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1451	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1650P	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1650S	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1651N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2150	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2151N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2152W	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2250	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2251N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2252W	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2550	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2551N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2552W	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2570	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2571	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Samsung Laser	Samsung ML - 2850	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2851	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2851ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2855ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3051N/ 3051ND (3050)	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3312ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3471ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3550N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3560	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3561N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3561ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3562W	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3712N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3712ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 4050N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 4550	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 4551N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 4551ND	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 6060	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 6060N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 6060S	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 7300	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 7300N	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 8400 (8400N, 8400G)	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 8800 (8800N, 8800G)	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 8900 (8900N, 8900G)	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress 6545N / SCX - 6545	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress 8030DN	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress 8040DN	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Samsung Laser	Samsung MultiXpress CLX - 8385	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2015DP PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress CLX - 8540	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2035DPE PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress CLX - 9250ND	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2045DP PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress CLX - 9350ND	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2045DPE PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress MFX - 4555	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2055DP PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung MultiXpress MFX - 5555	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2070DP PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 3185FN	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2085DP PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 3185N	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2105DP PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 3200	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 25105 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4725FN	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2522 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4825FN	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2527 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4828FN	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2532 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4833	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2535/2235 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4835	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2545/2245 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5530FN	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2555 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5635	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2560 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5639	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2575 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5737	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 2585 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5739	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 3515 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5835	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 40105 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5935	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4015 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6220	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4018 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6320F	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4018d PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6322	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4022 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6345N	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4027 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 7128	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4035 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 7135	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4045 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 7145	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4051 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 7635	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4060 PS	PCL5 and/or PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 7645	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 4075 PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin 4090 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9033b PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 4135eG PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9040 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 4145eG PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9040b PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 7025 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9050 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8016 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9050b PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8020 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9918DP PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8020d PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9922DP PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8025 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9927DP PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8025e PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9935D PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8030 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9935DP PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8030e PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9945DP PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8035/8035g PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9945DPE PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8035e PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9955DP PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8045/8045g PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin 9965DP PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8045e PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2020 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8055 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2408 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8060 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2410 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8065 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2524 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8070 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2525 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8075 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2532 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8080 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2820 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8090 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C2824 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8110 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C3030 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 8135 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C3210 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 816 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C3210e PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 9016 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C3224 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 9021d PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C3528 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 9025 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C3535 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 9025b PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C3828 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin 9033 PS	PCL5 and/or PCL6	Y	PCL Laser	Savin Laser	Savin C4535 PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin C4540 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin C6045 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin C6055 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin C7570 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP1036 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP128 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP131DN PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP135 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP1620 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP17 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP18 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP22 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP240D PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP26DN PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP27DN PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP28 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP31DN PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP35 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin CLP831 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin FAX3799/3799nf PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP145 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP150DN PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP175n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP25 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP25n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP26 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP26n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP28 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP28n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP31n PS	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin MLP31nL PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP32 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP35n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP36n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP45 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin MLP75n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SDC555 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SGC 1506 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP26 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP26n PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP27 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP32 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP38c PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP416c RPS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP45 PS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP517c RPS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP624d RPS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP624s RPS	PCL5 and/or PCL6	Y
PCL Laser	Savin Laser	Savin SLP6c RPS	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp 3501FN / 3501N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AL - 2051	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 162	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 163	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 164	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 168	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 168S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 201	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 207	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 208S / D	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 235	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Sharp Laser	Sharp AR - 250	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M208	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 275	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M236	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 287	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M237	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 337	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M256	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 407	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M257	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 810	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M258	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - BC260	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M267FP / AR - M267S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - BC320	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M276	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C160P	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M277	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C170M	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M280N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C172M	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M300N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C200P	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M316	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C240P	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M317	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C250	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M317s / AR - M317FP	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C260M	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M318	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C260P	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M350	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C262M	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M350N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C265P	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M355N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C270	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M450	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C270	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M450N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C270	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M455N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C330	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M550	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - C360P	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M620	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M150	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - M700	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M155	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - N275	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M160	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - P220	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M162	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - P300	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M165	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - P350	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M205	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp AR - P450	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M207	PCL5 and/or PCL6	Y	PCL Laser	Sharp Laser	Sharp DM - 3551	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Sharp Laser	Sharp DM - 4551	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp DX - B - 350	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp DX - B450	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp DX - C380	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp DX - C400	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp Libre AR - 266S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp Libre AR - 311S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp Libre AR - 351S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp Libre AR - 555S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp Libre AR - 625S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp Libre AR - 705S	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 1800N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2010U	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2300FG / 2300 - G	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2301N (MX - 2310)	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2600N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2610	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2700FG / 2700G / 2700P	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 3100N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 3110	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 3500FN	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 3500N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 3501FN / 3501N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 3600	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 3610	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 4001GA	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 4100N with optional Postscript)	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 4101N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 4500N / 4500FN	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Sharp Laser	Sharp MX - 4501N / 4501FN	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 4501N / 4501FN	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 5000N / MX - 5001N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 5500N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 5500N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 6200N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 6200N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 6201N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 6201N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 7000N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 7000N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 7001N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 7001N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - B - 381	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - B - 382	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - B400	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - B401	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - B402	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - C311 / DX - C311 / C1930 - C310	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - C381	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - C400	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - C401 / DX - C401	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - C402	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M1100	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M1100	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M160 / M161	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M260	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M283 N / U (MX - M282N)	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M310	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Sharp Laser	Sharp MX - M350 / 350U / 350N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M363 N / U (MX - M362N)	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M450 / 450U / 450N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M453 N / U (MX - M452N)	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M503 N / U (MX - M502N)	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M550 / 550U / 550N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M620 / 620U / 620N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M623N / U	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M700 / 700U / 700N	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M753N / U	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M850	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M850	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M950	PCL5 and/or PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M950	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 1050	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 1105	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 1355	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 16	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 162 / 162D	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 165	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 167	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 180CP	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 182	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 20	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 200L	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 2020c	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 202L	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 203L	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 203S / 203 SD	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 205	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 205	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 205L	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 207	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 211c	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 212	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 220CP	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 230	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 232	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 233	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 2330c	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 237	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 242	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 25	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 250CP	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 255	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 270P	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 28	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 280	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 280CP	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 282	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 283	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 2830c	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 300P	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 305	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 320P	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 35	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 350	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 350P	PCL5 and/or PCL6	Y
PCL Laser	Toshiba Laser	Toshiba e - STUDIO 3511	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Toshiba Laser	Toshiba SCX - 7428	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox 4110 Copier/Printer	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox 4112 Copier/Printer	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox 4127 Copier/Printer	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox 4510 Printer / Copier	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox 4595 Copier/Printer	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Color 550 Printer	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Color 560 Printer	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox ColorQube 8570 / 8870	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox ColorQube 8570 MFP / 8870 MFP	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox ColorQube 8870	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox ColorQube 9201	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox ColorQube 9202	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox ColorQube 9203	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox digital BookMark	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocPrint C3055	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 12	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 1632	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 2240	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 240	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 242	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 250	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 252	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 260	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 3535	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 3535	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 5252	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 7002 Digital Press	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 7002 Digital Press	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox DocuColor 7002 Digital Press	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 8002 Digital Press	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 8002 Digital Press	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 8002 Digital Press	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 420S	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 420ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 425	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 425ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 426ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 430 MFP	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 430ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 432	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 432ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 440	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 440ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 460	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 460ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 470	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 470ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 480	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 480ST	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 2065	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint 3055	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint C1190 FS	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint C4350	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2025	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2125B	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2125DT	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2125DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2125N	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox DocuPrint N2825DT	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2825DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N2825N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N3225N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N4025N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N4525CN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N4525DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuPrint N4525N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox FaxCentre 2121	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox FaxCentre 2218	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 1235	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 2135	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3070	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3125N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3160n	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3200 MFP	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3250 D / DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3300 MFP	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3400	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3400N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3425	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3428	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3435	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3450	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3450N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3500B	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3500DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3500N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3600 B / DN / N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 3635 MFP / S	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox Phaser 4400B	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 4400DT	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 4400DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 4400N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 4500	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 4510	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 4600DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 4620DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 5400N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 5500N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 5550 / B / DN / DT / DX / N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6120N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6130	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6140	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6180MFP/D	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6180N / 6180DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6250	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6280	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6280	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6300	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6350	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6360N / 6360DN / 6360DT / 6360DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 6500	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7300	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7400DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7400DT	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7400DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7400DXF	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7400N	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox Phaser 7500 N / DN / DT / DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7700/DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7700/DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7700/GX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7750	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 7760	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8400	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8500	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 850DP	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 850DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 850N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8550	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8560MFP N / 8560MFP DN / 8560MFP DT / 8560MFP DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8560N / 8560DN / 8560DT / 8560DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 860/B	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 860/DP	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 860/DX	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 860/N	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8860 MFP/D	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8860DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox Phaser 8860DN	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 133	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 133 Pro	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 232	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 232 Pro	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 238	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 238 Pro	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 245	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 245 Pro	PCL5 and/or PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox WorkCentre 255	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 255 Pro	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 265	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 265 Pro	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 275	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 275 Pro	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 3075	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 3210	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 3220	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 3550	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 4118	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 4150s / 4150x / 4150xf	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox workCentre 4250	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 4250c / s / x / xf	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 4260	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5030	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5050	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5135	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5150	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5222 Printer/Copier	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5225 Printer/Copier	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5230 Printer/Copier	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5632p/s	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5638p/s	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5645p/s	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5655p/s	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5665p/s	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5675p/s	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre 5687p/s	PCL5 and/or PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 7675	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 7755	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 7755	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 7765	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 7765	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 7775	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 7775	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro 90	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro C2128	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro C2636	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro C32 Color	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro C3545	PCL5 and/or PCL6	Y
PCL Laser	Xerox Laser	Xerox WorkCentre Pro C40 color	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 3700	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 3800 /n / dn / dtm	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4550	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4600	PCL5 and/or PCL6	Y
PCL Laser	HP Laser	HP DesignJet 1050C	PCL5C	Y
PCL Laser	HP Laser	HP DesignJet 1055CM	PCL5C	Y
PCL Laser	HP Laser	HP DesignJet 5000PS	PCL5C	Y
PCL Laser	HP Laser	HP DesignJet 800PS	PCL5C	Y
PCL Laser	HP Laser	HP CM8050 Color MFP	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP CM8050 MFP with Edgeline	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP CM8060 Color MFP	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP CM8060 MFP with Edgeline	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2500PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 2550PS	PCL5C and PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	HP Laser	HP Color LaserJet 2800 Series PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 3000 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 3700 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 3800 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4500 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4550 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4600 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4650 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 4700 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5/5M PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5500 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 5550 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 8500 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 8550 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 9500 PS	PCL5C and PCL6	Y
PCL Laser	HP Laser	HP Color LaserJet 9500mfp PS	PCL5C and PCL6	Y
PCL Laser	Brother Laser	Brother HL-1450	PCL6	Y
PCL Laser	Brother Laser	Brother HL-2600CN	PCL6	Y
PCL Laser	Brother Laser	Brother HL-2600CN BR-Script3	PCL6	Y
PCL Laser	Brother Laser	Brother HL-5050	PCL6	Y
PCL Laser	Brother Laser	Brother HL-5070N	PCL6	Y
PCL Laser	Canon Laser	Canon imageRUNNER 210PS	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 1700 (MS)	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2130cn Color Laser PCL6	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2135cn MFP PCL6	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2150cdn Color Printer PCL6	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2155cdn Color MFP PCL6	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 2155cn Color MFP PCL6	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer 3010cn	PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Dell Laser	Dell Laser Printer P1500 (MS)	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C400 PCL	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer S2500 (MS)	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C450 PCL	PCL6	Y
PCL Laser	Dell Laser	Dell Laser Printer W5300 (MS)	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II 4000 PCL	PCL6	Y
PCL Laser	Dell Laser	Dell MFP Laser 3115cn PCL6	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II 5010 PCL	PCL6	Y
PCL Laser	Dell Laser	Dell V520 Series	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II C2200 PCL	PCL6	Y
PCL Laser	Dell Laser	Dell V720 Series	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II C3300 PCL	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ABL 3150/3150 FS XPL2	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuCentre - II C4300 PCL	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ABL PR PCL	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C1616 XPL2	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort-II 3000 PCL	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C620 XPL2	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort-II 4000 PCL	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DocuPrint C830 XPL2	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort-II 5010 PCL	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 180 XPL2	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort-II C2200 PCL	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 181 XPL2	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort-II C3300 PCL	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 210 XPL2	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox ApeosPort-II C4300 PCL	PCL6	Y	PCL Laser	FujiXerox Laser	FujiXerox DP 211 XPL2	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DCL 620 XPL2	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 10512 PCL	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 1100 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 10512 PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 156 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 1202 PS	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 186	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 1302 PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 235 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 1302f PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 236 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 1502 PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 285 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 1802 PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 286 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 1802d PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 355 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 2212 PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 405 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 2712 PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 706/606/506 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 3212 PCL	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre 900 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 3502 PCL	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C240 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 3532/4235g PCL	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C250 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 3532/4235g PCL6	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C320 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 4502 PCL	PCL6	Y
PCL Laser	FujiXerox Laser	FujiXerox DocuCentre C360 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner 4532/4245g PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Gestetner Laser	Gestetner 4532/4245g PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 6002 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 6002 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 7502 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 7502 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 9002 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner 9002 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7425dn PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7521n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7526dn PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7528dn PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7531dn PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7535n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner C7640n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner CS555 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner CS555 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc424 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc424 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc428 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc428 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc428 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc428 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc432 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc445 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc445 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc460 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSc460 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm415 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm415 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm615 PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Gestetner Laser	Gestetner DSm615 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm616 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm616 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm618 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm618 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm620 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm620 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm620d PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm620d PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm622 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm622 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm627 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm627 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm635/635G PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm635/635G PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm645/645G PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm645/645G PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm651 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm651 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm660 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm660 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm675 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm675 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm725 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm725 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm730 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm730 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm735/735G PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm735/735G PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner DSm745/745G PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Gestetner Laser	Gestetner DSm745/745G PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner F104/F540 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner F104L/F550 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner F9103/F530 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner F9199/9199nf PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 161/DSm416 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 161/DSm416 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 171	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2510/DSm725e PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2510/DSm725e PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2550 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2550 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2550B PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2550B PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 2851	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3010/DSm730e PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3010/DSm730e PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3350 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3350 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3350B PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3350B PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 3351	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 4000 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 4000 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 4000B PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 4000B PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 4001	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 5000 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 5000 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 5000B PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Gestetner Laser	Gestetner MP 5000B PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 6000 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 6000 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 6001	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 7000 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 7000 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 7001	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 8000 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 8000 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 8001	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP 9001	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C2050	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C2550	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C2800	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C3300	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C4000	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C5000	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C6000 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C6000 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C6501 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C7500 PCL5c	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C7500 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP C7501	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1100/DSm7110 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1100/DSm7110 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1350/DSm7135 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1350/DSm7135 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1600/DSm716 PCL	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP1600/DSm716 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP2000/DSm721d PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless	Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Gestetner Laser	Gestetner MP2000/DSm721d PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7126n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP2500/DSm625 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7132n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP2500/DSm625 PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7245 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP3500/DSm735e PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7325 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP3500/DSm735e PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7325n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP4500/DSm745e PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7527 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP4500/DSm745e PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7527n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP5500/DSm755e PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7535n PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP5500/DSm755e PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7575 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP6500/DSm765e PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner P7675 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP6500/DSm765e PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner Pro 1106EX	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP7500/DSm775 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner Pro 1107EX	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP7500/DSm775 PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner Pro 1356EX	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP9000/DSm790 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner Pro 1357EX	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MP9000/DSm790 PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner Pro 906EX	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC1500/GS106 PCL	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner Pro 907EX	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC1500/GS106 PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP 8200DN PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC2000/DSc520 PCL6	PCL6	Y	PCL Laser	Gestetner Laser	Gestetner SP C420DN PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC2500/DSc525 PCL5c	PCL6	Y	PCL Laser	HP Laser	HP CM8000 Color MFP Series PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC2500/DSc525 PCL6	PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet 3000 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC3000/DSc530 PCL5c	PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet 4500 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC3000/DSc530 PCL6	PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP2020	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC3500/DSc535 PCL5c	PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP3525	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC3500/DSc535 PCL6	PCL6	Y	PCL Laser	HP Laser	HP Color LaserJet CP5220	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC4500/DSc545 PCL5c	PCL6	Y	PCL Laser	HP Laser	HP LaserJet 2100 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner MPC4500/DSc545 PCL6	PCL6	Y	PCL Laser	HP Laser	HP LaserJet 3200 Series PCL 6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner P7031n PCL6	PCL6	Y	PCL Laser	HP Laser	HP LaserJet 4000 Series PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner P7031nL PCL6	PCL6	Y	PCL Laser	HP Laser	HP LaserJet 4050 Series PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner P7035n PCL6	PCL6	Y	PCL Laser	HP Laser	HP LaserJet 4200/4300 PCL6	PCL6	Y
PCL Laser	Gestetner Laser	Gestetner P7126 PCL6	PCL6	Y	PCL Laser	HP Laser	HP LaserJet 4250 PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	HP Laser	HP LaserJet 4350	PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5000 Series PCL6	PCL6	Y
PCL Laser	HP Laser	HP LaserJet 5100 Series PCL6	PCL6	Y
PCL Laser	HP Laser	HP LaserJet 8000 Series PCL6	PCL6	Y
PCL Laser	HP Laser	HP LaserJet 8100 Series PCL6	PCL6	Y
PCL Laser	HP Laser	HP LaserJet 8150 Series PCL6	PCL6	Y
PCL Laser	HP Laser	HP LaserJet P2015 PCL6	PCL6	Y
PCL Laser	HP Laser	HP LaserJet P2050 Series PCL6	PCL6	Y
PCL Laser	HP Laser	HP LaserJet P3004	PCL6	Y
PCL Laser	HP Laser	HP LaserJet P3011/P3015 PCL6	PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 20 PS	PCL6	Y
PCL Laser	IBM Laser	IBM Infoprint 21 PS	PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1850 MFP	PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1860 MFP	PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1870 MFP	PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint 1880 MFP	PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint Pro 1107EX	PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint Pro 1357EX	PCL6	Y
PCL Laser	InfoPrint Laser	InfoPrint Pro 907EX	PCL6	Y
PCL Laser	Infotec Laser	Infotec 4151 MF PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec 4181 MF PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec 4182 MF PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec 4452 MF	PCL6	Y
PCL Laser	Infotec Laser	Infotec 4535 MF	PCL6	Y
PCL Laser	Infotec Laser	Infotec IF2100/ IF2100e PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IF2150 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IF2200/ IF2150e PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 2525 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 2525DN PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 2832 PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Infotec Laser	Infotec IPC 3030DN PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 3535e PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IPC 4040DN PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2013 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2015	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2015 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2018	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2018 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2018D	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2018D PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2022	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2027	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2032	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2035	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2035 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2045	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2045 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2060	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2060 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2075	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2075 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2090	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2090 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2105	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2105 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2122	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2122 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2127	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2127 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec IS 2132	PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Infotec Laser	Infotec ISC 2020 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2028	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2428	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2428 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2432	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2525	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2525 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2835	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2835 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 2838	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 3030 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 3535	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 3535 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 3545	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 3545 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 4045	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 4045 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 4560	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 4560 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 5560	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 5560 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 615G	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 615G PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec ISC 824	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 171	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 2550 PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 2550 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 2550B PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 2550B PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 2851	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Infotec Laser	Infotec MP 3350 PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 3350 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 3350B PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 3350B PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 3351	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 4000 PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 4000 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 4000B PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 4000B PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 4001	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 5000 PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 5000 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 5000B PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 5000B PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 5001	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 6000 PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 6000 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 7000 PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 7000 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 7001	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 8000 PCL	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 8000 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 8001	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP 9001	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C2050	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C2550	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C2800	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C3300	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C4000	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C5000	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Infotec Laser	Infotec MP C6000 PCL5c	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C6000 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C6501	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C7500 PCL5c	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C7500 PCL6	PCL6	Y
PCL Laser	Infotec Laser	Infotec MP C7501	PCL6	Y
PCL Laser	Infotec Laser	Infotec Pro 1106EX	PCL6	Y
PCL Laser	Infotec Laser	Infotec Pro 1107EX	PCL6	Y
PCL Laser	Infotec Laser	Infotec Pro 1356EX	PCL6	Y
PCL Laser	Infotec Laser	Infotec Pro 1357EX	PCL6	Y
PCL Laser	Infotec Laser	Infotec Pro 906EX	PCL6	Y
PCL Laser	Infotec Laser	Infotec Pro 907EX	PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta magicolor 2350	PCL6	Y
PCL Laser	Konica & Konica Minolta Laser	Konica Minolta magicolor 3300 PPD	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS-1000	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS-1000+	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS-1010	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1050	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1200	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1700+	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1750	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1800	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1800+	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 1900	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 3750	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 3800	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita FS - 9500DN	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 2530	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 3530	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 4230	PCL6	Y
PCL Laser	Kyocera - Mita Laser	Kyocera - Mita KM - 5230	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5515 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5518 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5612 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5612F PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5613 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5613F PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5618 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5622 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5627 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5632 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5635 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier 5645 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LC155 PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier LC155 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD0105 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD0105 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD015 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD015 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD035 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD035 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD045 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD045 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD060 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD060 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD075 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD075 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD090 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD090 PCL6	PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier LD-115 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-115 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-116 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-116 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-118 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-118 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-118d PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-118d PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-120 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-120 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-120d PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-120d PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-122 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-122 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-124c PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-124c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-127 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-127 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-132 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-132 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-132c PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-132c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-135 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-135 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-145 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-145 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-151 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-151 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-160 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-160 PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier LD-160c PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-160c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-175 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-175 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-225 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-225 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-228c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-230 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-230 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-235 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-235 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-245 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-245 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-328c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-328c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-335c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-335c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-345c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier LD-345c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LF310/LF311 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LF410/411 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LF415e/411e/416e PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LF510/515e PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP025/LP026 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP025/LP026 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP025N/LP026N PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP032 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP125cx/LP126cn PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP127n/LP128n PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP128 PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier LP131n PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP131nL PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP135n PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP136n PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP145n/SP 8100DN PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP150dn/SP8200DN PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP175/LP175hdn PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP222cn/LP221c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP226c/SP C410 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP231c/SP C411 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP331cn/SP C420 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP332c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP335c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier LP440c/SP C811DN PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 1100/LD - 1100 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 1100/LD - 1100 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 1350/LD - 1135 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 1350/LD - 1135 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 1600/LD - 316 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 1600/LD - 316 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 161/LD016 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 161/LD016 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 171/LD117	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2000/LD - 320d PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2000/LD - 320d PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2510/LD - 325 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2510/LD - 325 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2550/LD - 425 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2550/LD - 425 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2550B/LD - 425B PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier MP 2550B/LD - 425B PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 2851/LD528	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3010/LD-330 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3010/LD - 330 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3350/LD-433 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3350/LD - 433 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3350B/LD-433B PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3350B/LD - 433B PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3351/LD533	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3500/LD - 335 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 3500/LD - 335 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 4000/LD040 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 4000/LD040 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 4000B/LD040B PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 4000B/LD040B PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 4001/LD140	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 4500/LD - 345 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 4500/LD - 345 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 5000/LD050 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 5000/LD050 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 5000B/LD050B PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 5000B/LD050B PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 5001/LD150	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 5500/LD - 255 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 5500/LD - 255 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 6000/LD - 260 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 6000/LD - 260 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 6000/LD - 260 PS	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 6001/LD360	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 6500/LD - 265 PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier MP 6500/LD - 265 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 7000/LD - 270 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 7000/LD - 270 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 7001/LD - 370	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 7500/LD - 275 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 7500/LD - 275 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 8000/LD - 280 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 8000/LD - 280 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 8001/LD - 380	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 9000/LD - 190 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 9000/LD - 190 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP 9001/LD - 390	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2000/LD - 420c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2050/LD - 520C	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2500/LD - 425c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2500/LD - 425c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2550/LD - 525C	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C2800/LD - 528C	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C3000/LD - 430c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C3000/LD - 430c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C3300/LD - 533C	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C3500/LD - 435c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C3500/LD - 435c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C4000/LD - 540C	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C4500/LD - 445c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C4500/LD - 445c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C5000/LD-550C	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C6000/LD - 260c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C6000/LD - 260c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C6501/LD-365C	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lanier Laser	Lanier MP C7500/LD - 275c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C7500/LD - 275c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP C7501/LD-375C	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP2500/LD - 125 PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier MP2500/LD - 125 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier MPC1500/LD - 215c PCL5c	PCL6	Y
PCL Laser	Lanier Laser	Lanier MPC1500/LD - 215c PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier Pro 1106EX	PCL6	Y
PCL Laser	Lanier Laser	Lanier Pro 1107EX	PCL6	Y
PCL Laser	Lanier Laser	Lanier Pro 1356EX	PCL6	Y
PCL Laser	Lanier Laser	Lanier Pro 1357EX	PCL6	Y
PCL Laser	Lanier Laser	Lanier Pro 906EX	PCL6	Y
PCL Laser	Lanier Laser	Lanier Pro 907EX	PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4100N PCL	PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4100N PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 4110N PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier SP 9100/LP275 PCL6	PCL6	Y
PCL Laser	Lanier Laser	Lanier SP C400DN PCL6	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C510 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C520 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C522 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C524 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C752 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C760 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C762 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C912 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark C920 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E120n (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E232 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E234 (MS)	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark E234n (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E238 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E240 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E250d (MS) / E250dn (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E260 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E260d (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E260dn (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E323 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E330 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E332n (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E340 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E342n (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E350d (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E352dn	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E352dn (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E360d (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E360dn (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E450dn (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E460dn (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark E460dw (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T430 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T630 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T632 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T634 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T640 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T642 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T644 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T650 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T652 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T654	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Lexmark Laser	Lexmark T654 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark T656	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark W812 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark W840 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X172	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X172P	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X173	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X173P	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X175	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X422 (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X642e (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X644e (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X646e (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X651 de (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X652 de (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X654 de (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X656 de (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X658 de (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X830e (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X832e (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X850e (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X852e (MS)	PCL6	Y
PCL Laser	Lexmark Laser	Lexmark X854e (MS)	PCL6	Y
PCL Laser	NEC Laser	NEC Color MultiWriter 7500C	PCL6	Y
PCL Laser	NRG Laser	NRG 10515/10518/10512	PCL6	Y
PCL Laser	NRG Laser	NRG 10515/10518/10512 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 1205/1208/1202 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 1205f/1208F/1202f PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 1305/1308/1502 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 1305f/1308F/1302f PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG 1505/1508/1502 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 1805/1808/1802 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 1805d/1808D/1802d PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 2205/2238/2212 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 2705/2738/2712 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 3205/3238/3212 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 3525/3508/3502 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 3545/3518/3532 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 3545/3518/3532 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 4525/4508/4502 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 4545/4518/4532 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 4545/4518/4532 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 6002/6005/6008 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 6002/6005/6008 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 7502/7505/7508 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 7502/7505/7508 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG 9005/9008/9002 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG 9005/9008/9002 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG C7425dn PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG C7521n PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG C7528n PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG C7535hdn PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG CS555 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG CS555 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSc424 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG DSc424 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSc428 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG DSc428 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSc432 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG DSc432 PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG DSc435 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG DSc435 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSc445 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG DSc445 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSc460 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG DSc460 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm415 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm415 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm615 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm615 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm616 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm616 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm618 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm618 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm618d PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm620 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm620 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm620d PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm620d PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm622 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm622 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm627 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm627 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm632 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm632 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm635 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm635 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm645 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm645 PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG DSm651 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm651 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm660 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm660 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm675 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm675 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm725 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm725 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm730 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm730 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm735 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm735 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG DSm745 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG DSm745 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG F104/F540 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG F104L/F550 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 1100 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 1100 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 1350 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 1350 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 1600 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 1600 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 161 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 161 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 171	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2000 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2500 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2510 PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG MP 2510 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2550 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2550 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2550B PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2550B PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 2851	PCL6	Y
PCL Laser	NRG Laser	NRG MP 3010 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 3010 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 3350 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 3350 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 3350B PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 3350B PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 3351	PCL6	Y
PCL Laser	NRG Laser	NRG MP 4000 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 4000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 4000B PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 4000B PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 4001	PCL6	Y
PCL Laser	NRG Laser	NRG MP 4500 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 4500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 5000 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 5000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 5000B PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 5000B PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 5001	PCL6	Y
PCL Laser	NRG Laser	NRG MP 5500 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 5500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 6000 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 6000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 6001	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG MP 6500 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 6500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 7000 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 7000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 7001	PCL6	Y
PCL Laser	NRG Laser	NRG MP 7500 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 7500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 8000 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 8000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 8001	PCL6	Y
PCL Laser	NRG Laser	NRG MP 9000 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG MP 9000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP 9001	PCL6	Y
PCL Laser	NRG Laser	NRG MP C1500sp PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG MP C1500sp PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C2000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C2050	PCL6	Y
PCL Laser	NRG Laser	NRG MP C2500 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG MP C2500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C2550	PCL6	Y
PCL Laser	NRG Laser	NRG MP C2800	PCL6	Y
PCL Laser	NRG Laser	NRG MP C3000 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG MP C3000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C3300	PCL6	Y
PCL Laser	NRG Laser	NRG MP C3500 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG MP C3500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C4000	PCL6	Y
PCL Laser	NRG Laser	NRG MP C4500 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG MP C4500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C5000	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG MP C6000 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG MP C6000 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C6501	PCL6	Y
PCL Laser	NRG Laser	NRG MP C7500 PCL5c	PCL6	Y
PCL Laser	NRG Laser	NRG MP C7500 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG MP C7501	PCL6	Y
PCL Laser	NRG Laser	NRG MP W2400	PCL6	Y
PCL Laser	NRG Laser	NRG MP W3600	PCL6	Y
PCL Laser	NRG Laser	NRG MP W5100	PCL6	Y
PCL Laser	NRG Laser	NRG MP W7140	PCL6	Y
PCL Laser	NRG Laser	NRG P7026 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7026N PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7126 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7126 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG P7126N PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7126N PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG P7132N PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7132N PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG P7145 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7145 PS	PCL6	Y
PCL Laser	NRG Laser	NRG P7325 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7325 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG P7325N PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7325N PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG P7527 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7527 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG P7527n PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7527n PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG P7535n PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7535n PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	NRG Laser	NRG P7575 PCL	PCL6	Y
PCL Laser	NRG Laser	NRG P7575 PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG Pro 1106EX	PCL6	Y
PCL Laser	NRG Laser	NRG Pro 1107EX	PCL6	Y
PCL Laser	NRG Laser	NRG Pro 1356EX	PCL6	Y
PCL Laser	NRG Laser	NRG Pro 1357EX	PCL6	Y
PCL Laser	NRG Laser	NRG Pro 906EX	PCL6	Y
PCL Laser	NRG Laser	NRG Pro 907EX	PCL6	Y
PCL Laser	NRG Laser	NRG SP 4100N PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP 4100NL PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP 4110N PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP 8100DN PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP 8200DN PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP 9100DN PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP C410DN PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP C411DN PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP C420DN PCL6	PCL6	Y
PCL Laser	NRG Laser	NRG SP C811DN PCL6	PCL6	Y
PCL Laser	OCE Laser	OCE cm2520	PCL6	Y
PCL Laser	Oki Laser	Oki 14i	PCL6	Y
PCL Laser	Oki Laser	Oki Microline 22NR PS (MS)	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1013F PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1018D PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 120	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1515 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 1515 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2051 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2051 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2060 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2060 PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio 2075 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 2075 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3025 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3025 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3030 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3030 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3035 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3035 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3045 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3045 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3224C PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3228C PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3232C PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3232C PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3235C PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3245C PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio 3260C PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2610 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP2610N PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP400 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP400N PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP410 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio AP600N PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL3500N PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio CL4000HDN PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio FX12 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 1100 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 1100 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 1350 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 1350 PCL6	PCL6	Y



Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Ricoh Laser	Ricoh Aficio MP 161 PCL	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 161 PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 171	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 2510 PS	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 5500	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 6500	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 7500	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP 9000	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C2500 PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio MP C6501	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 4100N PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 4100NL PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 4110N PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP 8200DN PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C411dn PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C411dn PS	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C420dn PCL5c	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C420dn PS	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C430 DN	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh Aficio SP C431 DN	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh FAX3310L/3310Le PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh FAX4410L/4420L PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh FAX4410NF PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh FAX5510L/5510N F PCL6	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh MP C1500/615C PCL56	PCL6	Y
PCL Laser	Ricoh Laser	Ricoh MP C1500/615C PCL5c	PCL6	Y
PCL Laser	Samsung Laser	Samsung CLP - 610 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung CLP - 6200 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung CLP - 6240 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung CLP - 660 Series PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Samsung Laser	Samsung CLP - 770 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung CLX - 8380 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung MFP 830 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1250/ ML-250	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1450 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1650 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1660 PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 1750 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2050 PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2250M PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2550S Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2850 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 2855 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3050 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 3470 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 4050 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 4600 PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 6080 PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung ML - 8x00 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4725 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4x20 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4x24 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4x26 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 4x28 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5120 Series	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5635 Series PS	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5x 12 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5x 15 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 5x 30 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6x 20 Series PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Samsung Laser	Samsung SCX - 6x 22 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6x 45 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SCX - 6x 55 Series PCL6	PCL6	Y
PCL Laser	Samsung Laser	Samsung SF-8100 Series	PCL6	Y
PCL Laser	Savin Laser	Savin 2512 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 2513 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 2513f PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 2515 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 2518 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 2518d PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 2522 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 2527 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 2532 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 2535/2235 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 2545/2245 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 2560 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 2560 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 2575 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 2575 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 3515 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 3515 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 40105 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 40105 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4015 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4015 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4018 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4018 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4018d PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4018d PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4022 PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin 4022 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4027 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4027 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4035/4135g PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4035/4135g PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4035e/4135eG PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4035e/4135eG PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4045/4145g PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4045/4145g PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4045e/4145eG PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4045e/4145eG PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4051 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4051 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4060 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4060 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4075 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4075 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 4090 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 4090 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 7025 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 7025 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8016 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8016 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8020 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8020 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8020d PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8020d PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8025 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8025 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8025e PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin 8025e PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8030 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8030 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8030e PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8030e PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8035/8035g PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8035/8035g PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8035e PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8035e PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8045/8045g PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8045/8045g PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8045e PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8045e PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8055 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8055 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8060 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8060 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8065 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8065 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8070 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8070 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8075 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8075 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8080 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8080 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8090 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8090 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8110 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 8110 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 8135 PCL	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin 8135 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 816 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 816 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9016 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9016 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9021d PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9021d PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9025 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9025 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9025b PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9025b PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9033 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9033 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9033b PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9033b PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9040 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9040 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9040b PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9040b PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9050 PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9050 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9050b PCL	PCL6	Y
PCL Laser	Savin Laser	Savin 9050b PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin 9060	PCL6	Y
PCL Laser	Savin Laser	Savin 9070	PCL6	Y
PCL Laser	Savin Laser	Savin 9080	PCL6	Y
PCL Laser	Savin Laser	Savin 9090	PCL6	Y
PCL Laser	Savin Laser	Savin 917	PCL6	Y
PCL Laser	Savin Laser	Savin 9228	PCL6	Y
PCL Laser	Savin Laser	Savin 9233	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin 9240	PCL6	Y
PCL Laser	Savin Laser	Savin 9250	PCL6	Y
PCL Laser	Savin Laser	Savin C2020 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C2410 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C2410 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C2524 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C2525 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C2525 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C2532 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C2820 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C2824 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C2824 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C2828	PCL6	Y
PCL Laser	Savin Laser	Savin C3030 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C3030 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C3210 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C3210e PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C3210e PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C3224 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C3333	PCL6	Y
PCL Laser	Savin Laser	Savin C3528 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C3528 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C3528 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C3528 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C4040	PCL6	Y
PCL Laser	Savin Laser	Savin C4535 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C4535 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C4540 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C4540 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C5050	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin C6045 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C6045 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C6055 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C6055 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C7570 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin C7570 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin C9020	PCL6	Y
PCL Laser	Savin Laser	Savin C9025	PCL6	Y
PCL Laser	Savin Laser	Savin C9065	PCL6	Y
PCL Laser	Savin Laser	Savin C9075	PCL6	Y
PCL Laser	Savin Laser	Savin CLP1036 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin CLP128 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin CLP131DN PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin CLP135 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin CLP22 PCL56	PCL6	Y
PCL Laser	Savin Laser	Savin CLP240D PCL56	PCL6	Y
PCL Laser	Savin Laser	Savin CLP26DN PCL56	PCL6	Y
PCL Laser	Savin Laser	Savin CLP27DN PCL56	PCL6	Y
PCL Laser	Savin Laser	Savin CLP31DN PCL56	PCL6	Y
PCL Laser	Savin Laser	Savin FAX3725/3725e PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin FAX3750/3760 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin FAX3750nf/3760nf PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin FAX3799/3799nf PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP145 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP150DN PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP175n PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP25 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP25n PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP26 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP26n PCL6	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Savin Laser	Savin MLP28 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP28n PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP31n PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP31nL PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP32 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP35n PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP36n PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin MLP75n PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin Pro 1106EX	PCL6	Y
PCL Laser	Savin Laser	Savin Pro 1107EX	PCL6	Y
PCL Laser	Savin Laser	Savin Pro 1356EX	PCL6	Y
PCL Laser	Savin Laser	Savin Pro 1357EX	PCL6	Y
PCL Laser	Savin Laser	Savin Pro 906EX	PCL6	Y
PCL Laser	Savin Laser	Savin Pro 907EX	PCL6	Y
PCL Laser	Savin Laser	Savin SDC555 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin SDC555 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin SGC 1506 PCL5c	PCL6	Y
PCL Laser	Savin Laser	Savin SGC 1506 PCL6	PCL6	Y
PCL Laser	Savin Laser	Savin SP C400DN PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 155FG SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 158F PCL 6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 160M SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 163FG SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 163G SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 168D PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 200M SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 205FG SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 205G SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 215 PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 255FP SPDL 2	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Sharp Laser	Sharp AR - 255P SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 265FP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 265S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 266FP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 266S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 267FP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 267S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 310M SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 311FP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 311N SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 311S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 312S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 317FP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 317S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 350LP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 350M SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 351FP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 351N SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 351S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 420S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 450LP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 450M SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 451FP SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 451N SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 451S SPDL 2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 5220 PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 555M SPDL2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 555S SPDL2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 625M SPDL2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 625S SPDL2	PCL6	Y

Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Sharp Laser	Sharp AR - 705M SPDL2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - 705S SPDL2	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M161	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M200	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M201	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M206	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M208N	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M209	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M280	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M280U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M300	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M300U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M310U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M312U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M350U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M351N	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M351U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M355U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M420U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M450U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M451N	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M451U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M455U	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M550N PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M550U PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M620N PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M620U PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M700N PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp AR - M700U PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp DM - 2515 SPDL2	PCL6	Y


Type	Brand Name	Printer Name/Number	PDL (EG)	Wired/Wireless
PCL Laser	Sharp Laser	Sharp DM - 3500 PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp DM - 4500 PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp DM - 4501	PCL6	Y
PCL Laser	Sharp Laser	Sharp FO-DC550 PCL6	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2300FG SPDL 2-c	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2300G SPDL 2-c	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2300N	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2700FG SPDL 2-c	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2700G SPDL 2-c	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - 2700N	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M350F SPDL2	PCL6	Y
PCL Laser	Sharp Laser	Sharp MX - M450F SPDL2	PCL6	Y
PCL Laser	Sindoh Laser	Sindoh MF 4450L_5450L	PCL6	Y
PCL Laser	Sindoh Laser	Sindoh MF 4450Le_5450Le	PCL6	Y
PCL Laser	Sindoh Laser	Sindoh MF 4550_5550	PCL6	Y
PCL Laser	Sindoh Laser	Sindoh MF 4550H_5550H	PCL6	Y
PCL Laser	Sindoh Laser	Sindoh MF 4550M_5450M	PCL6	Y
PCL Laser	Source Technologies Laser	Source Technologies ST-9651	PCL6	Y
PCL Laser	Source Technologies Laser	Source Technologies ST-9652	PCL6	Y
PCL Laser	Source Technologies Laser	Source Technologies ST-9653	PCL6	Y
PCL Laser	Tally Laser	Tally T9020 PCL	PCL6	Y
PCL Laser	Tally Laser	Tally T9112 PCL	PCL6	Y
PCL Laser	Tally Laser	Tally T9116D PCL	PCL6	Y
PCL Laser	Tally Laser	Tally T9212 PCL	PCL6	Y
PCL Laser	Tally Laser	Tally T9308 PCL	PCL6	Y
PCL Laser	Tally Laser	Tally T9408 PCL	PCL6	Y
PCL Laser	Xerox Laser	Xerox DocuColor 12 PS3	PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 535 PCL6	PCL6	Y
PCL Laser	Xerox Laser	Xerox Document Centre 545 PCL6	PCL6	Y



You can download the LG TV Remote app from Google Play Store or Apple App Store and use it on any TV connected with your smartphone.

- Now you can enjoy your favorite TV shows on your smartphone. (Some models only)
- You can easily enter your account information to log in.
- You can add your favorite channels on your smartphone.
- You can use the functions such as PREMIUM, MY Apps, SmartShare™, and Social Center directly on your smartphone.
- The text input function is supported, so you can enter text easily. (Text cannot be entered on some screens.)
- Select the app's touch pad to control in the same way the pointer of the Magic Remote Control works.
- You can control the game app of the TV by selecting the Game Pad in the LG TV Remote app.



- Keypad which allows you to control the set-top box and media devices is provided. (Some models with specified conditions only.)
  - You can set the TV to the power-saving mode while watching TV on your smartphone.
  - You can capture the screen you are watching and share it through social network services such as Twitter and Facebook.
-  The supported functions may vary depending on the TV or the version of the LG TV Remote app.

## ❑ To use a USB wired/wireless mouse

Connect your mouse to the USB port. Use the mouse to move the pointer on the TV screen and select the menu you want.

Mouse	Magic Remote Control
Left Button	OK Button on Magic Remote Control
Wheel Button	Wheel Button on Magic Remote Control

- ✎ The right and the special buttons on the mouse do not work.
- ✎ The usability of a wireless USB mouse and keyboard may be affected by Radio Frequency environment and the distance.

## ❑ To use a USB wired/wireless keyboard

Connect your keyboard to the USB port. You can enter text with the keyboard when using the search function and the Internet.

- ✎ Text cannot be entered on some screens.
- ✎ It is recommended to use the product which is tested for compatibility with LG TV.  
LOGITECH K200, LOGITECH K400, MICROSOFT Comfort Curve 2000, MICROSOFT MS800, and LG Electronics ST-800
- ✎ You can change the input language by pressing the language switch key (or the right Alt key) on your keyboard.

## ❑ To use a gamepad

Connect your gamepad to the USB port on the TV if the game requires a gamepad.

✎ It is recommended to use an authorized gamepad which is tested for compatibility with LG TV.

Logitech F310, Logitech F510, Logitech F710, Logitech Rumblepad 2, and Microsoft Xbox 360 Controller (wired)

## SMART ⇒ Settings → SUPPORT → Software Update


Uses Software Update to check and obtain the latest version.

It is also possible to check manually for available updates.

Software Update	Set it to On. If an update is available, a prompt will appear to perform the update.
Automatic update mode	If an update is available, the update automatically starts without prompting.
Check Update Version	Checks the latest update version installed. When a new update is available, the download process can be performed manually.

- ✎ When the update starts, the update progress window appears for a short time and disappears.
- ✎ The latest version can be obtained via the digital broadcast signal or an internet connection.
- ✎ Changing the programme while downloading the software via a digital broadcast signal interrupts the download process. Returning to the initial programme allows downloading to resume.
- ✎ If software is not updated, certain functions may not work properly.
- ✎ [For Finland/Sweden/Denmark/Norway models.]  
If the software update is performed via the broadcasting signal, you will be prompted to continue the update regardless of whether the **Automatic update mode** is enabled or not.

If the following symptoms occur, please carry out the checks and adjustments described below. There may be no malfunction.

**SMART**  ⇒ **Settings** → **SUPPORT** → **Signal Test**

Shows the MUX and Service information etc. If you select Antenna & Satellite or Cable & Satellite, a signal test only for Antenna or Cable is displayed.

## General

Problem	Solution
Cannot view certain programmes.	<ul style="list-style-type: none"><li>• Adjust the location or orientation of the antenna.</li><li>• Save the programmes you wish to view later using <b>Auto Tuning</b> or <b>Programme Edit</b>.</li></ul>
There is a delay after the TV is switched on before the image is fully visible.	<ul style="list-style-type: none"><li>• This is not a problem. Image noise that may occur when the TV is first switched is being cleaned up.</li></ul>

## □ Pictures

**SMART**  ⇒ **Settings** → **SUPPORT** → **Picture Test**

First run a Picture Test to verify that the image signal output is normal.

If there is no problem with the test image, check external device connections and broadcast signals.


Problem	Solution
Images from previous programme or other programmes linger or the screen displays annoying lines.	<ul style="list-style-type: none"><li>• Adjust the orientation of the antenna to the TV transmitter, or refer to the manual for instructions on connecting the antenna.</li></ul>



Problem	Solution
Vibrating horizontal/vertical lines and fishnet patterns appear momentarily.	<ul style="list-style-type: none"><li>• Such a problem may happen when there is strong electronic interference. Turn off other electronic devices such as mobile phones, power tools and other small electrical appliances.</li></ul>
The screen display freezes or does not work properly during a digital broadcast.	<ul style="list-style-type: none"><li>• This may occur in case of a weak signal or unstable reception. Adjust the antenna orientation and cable connections.</li><li>• If the signal strength or quality is low on <b>Manual Tuning</b>, check with the TV station or administration office.</li></ul>
Digital broadcasting is not available even though the cable is connected.	<ul style="list-style-type: none"><li>• Check with the cable operator providing your subscription and/or signal. (Depending on your subscription, digital broadcasting may not be supported.)</li></ul>

Problem	Solution
The display is inactive or unclear when connected to an HDMI® source.	<ul style="list-style-type: none"><li data-bbox="642 130 1641 288">• Check the HDMI® cable specifications. If your HDMI® cable is not genuine, images may fade in and out or not be displayed properly.</li><li data-bbox="642 304 1649 462">• Ensure that all cables are securely connected. When connections are not secure, images may not be properly displayed.</li></ul>
Does not work with a USB storage device.	<ul style="list-style-type: none"><li data-bbox="642 491 1595 586">• Verify that the USB device and cable is version 2.0 or higher.</li></ul>

## □ Sound

**SMART**  ⇒ **Settings** → **SUPPORT** → **Sound Test**

First run a Sound Test to verify that the sound signal output is normal.

If there is no problem with the test sound, check connected external devices and the broadcast signal.

Problem	Solution
Screen display is on but there is no sound.	<ul style="list-style-type: none"><li>• Check other TV programmes.</li><li>• Ensure the <b>TV Speaker</b> is set to <b>On</b>.</li></ul>
For an analogue broadcast, stereo is not clear or sound comes from one speaker only.	<ul style="list-style-type: none"><li>• In a poor reception area (areas with weak or unstable signals) or if Multi Audio is not stable, select <b>Mono</b> on <b>Multi Audio</b>.</li><li>• Adjust the Balance using the Navigation button.</li></ul>

Problem	Solution
TV sound is not in sync with the image or the sound breaks up occasionally.	<ul style="list-style-type: none"><li>• If the issue affects a specific TV programme only, it may be caused by problems with the broadcast signal for the individual station. Check with the TV station or your cable operator.</li></ul>
The volume changes when I change programme.	<ul style="list-style-type: none"><li>• Volume can vary from programme to programme.</li><li>• Set <b>Auto Volume</b> to <b>On</b>.</li></ul>

Problem	Solution
<p>On certain programmes, there is no sound at all, or only the background music can be heard (in case of a programme created for overseas viewers).</p>	<ul style="list-style-type: none"><li>• In Language, set <b>Language</b> → <b>Audio Language</b> to the language of your choice. Even if you change the language on <b>Multi Audio</b>, you can go back to the default setup once you turn off the power or change the programme.</li></ul>
<p>There is no sound when connected to HDMI / USB.</p>	<ul style="list-style-type: none"><li>• Verify that the HDMI<sup>®</sup> cable is high speed.</li><li>• Check if the USB device and cable is version 2.0 or higher.</li><li>• Use only regular music (*.mp3) files.</li></ul>

## ❑ PC connection problem

Problem	Solution
The screen display does not come on after connecting to the computer.	<ul style="list-style-type: none"><li>• Verify that the computer and the TV are securely connected.</li><li>• Turn the TV off and back on using the remote control.</li><li>• Restart the PC with the TV on.</li><li>• Check whether the resolution is correctly set for PC input.</li><li>• To use the TV as a secondary monitor, check if the connected desktop or laptop supports dual monitor display.</li><li>• Reconnect the HDMI cable.</li></ul>
There is no sound after connecting the computer with the HDMI cable.	<ul style="list-style-type: none"><li>• Check with manufacturer of your video card to ensure it supports HDMI voice output. (Video cards in DVI format require connection of a separate sound cable.)</li></ul>

## Problem

When connected to the computer, the display is partially cut off or shifts to one side.

## Solution

- Set the resolution to support PC input. (If this does not work, reboot the computer.)


## ❑ Problems replaying movies in My Media


Problem	Solution
I cannot view the files on the Movie List.	<ul style="list-style-type: none"><li>• Check whether the file on the USB storage device can be read on a computer.</li><li>• Check whether the file extension is supported.</li></ul>
"This file is invalid." message appears or the image display is not normal even though the sound is OK.	<ul style="list-style-type: none"><li>• Make sure that the file replays normally on the computer's video player. (Check for damaged files.)</li><li>• Check whether the resolution is supported by the computer.</li><li>• Verify that the video/audio codec is supported.</li><li>• Verify that the frame rate is supported.</li></ul>



Problem	Solution
<p>"Audio not supported." message appears or the sound is not normal even though the image display is OK.</p>	<ul style="list-style-type: none"><li>• Make sure that the file replays normally on the computer's video player. (Check for damaged files.)</li><li>• Check if the audio codec is supported by the computer.</li><li>• Verify that the bit rate is supported.</li><li>• Verify that the sample rate is supported.</li></ul>

Problem	Solution
Subtitles are not displayed.	<ul style="list-style-type: none"><li>• Make sure that the file replays normally on the computer's video player. (Check for damaged files.)</li><li>• Check if the video file has the same name as the subtitle file.</li><li>• Make sure that the video and subtitle files are in the same folder.</li><li>• Verify that the subtitle file format is supported.</li><li>• Verify that the subtitle language is supported. (Subtitle files can be opened in Notepad to check the language.)</li></ul>

 Image shown may differ from your TV.

 For information on requesting service, refer to the following menu.

**SMART**  ⇒ Settings → SUPPORT → Product/Service Info.

Product certified before February 15, 2013

Продукт, сертифицированный до 15  
февраля 2013 г.



BZ03

Product certified after February 15, 2013

Продукт, сертифицированный после 15  
февраля 2013 г.





ПІІ 'ЛГ Електронікс Україна', Україна, 01004, м. Київ, вул. Басейна, 4 (літера А),  
тел.: +38 (044) 201-43-50, факс: +38 (044) 201-43-73

### **Обмеження України на наявність небезпечних речовин**

Устаткування відповідає вимогам технічного регламенту щодо обмеженого використання небезпечних речовин в електричному і електронному обладнанні.

### **Ukraine Restriction of Hazardous Substances**

The equipment complies with requirements of the Technical Regulation, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

☐ [English]

## EU Conformity Notice

**CE 0197** LG Electronics hereby declares that this product is in compliance with the following Directives.

R&TTE Directive 1999/5/EC

EMC Directive 2004/108/EC

LOW VOLTAGE Directive 2006/95/EC

The products described above comply with the essential requirements of the directives specified. This device is a 2.4 GHz wideband transmission system, intended for use in all EU member states and EFTA countries, except in France.

This device may not be used for setting up outdoor radio links in France and in some areas the RF output power may be limited to 10 mW EIRP in the frequency range of 2454 – 2483.5 MHz. For detailed information the end user should contact the national spectrum authority in France.

European representative:

LG Electronics Inc. Krijgsman 1, 1186 DM Amstelveen, The Netherlands

The product is designed for indoor use only.

CE Notified Body statement:

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

□ [Shqip]

**Deklarata e Konformitetit për BE-në**

LG Electronics nëpërmjet kësaj deklaron se ky produkt është në përputhje me Direktivat e mëposhtme.

Direktivën R&TTE 1999/5/KE

Direktivën EMC 2004/108/KE

Direktivën për VOLTASHIN E ULËT 2006/95/KE

Produktet e përshkruara më lart përputhen me kërkesat thelbësore të direktivave të specifikuar.

Përfaqësuesi evropian:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Holandë

Vetëm për përdorim të brendshëm.

□ [Bosanski]

**Napomena o usklađenosti sa propisima EU**

LG Electronics ovim putem izjavljuje da je ovaj proizvod usklađen sa sljedećim direktivama:

Direktiva o radijskoj opremi i telekomunikacijskoj terminalnoj opremi 1999/5/EC

Direktiva o elektromagnetskoj kompatibilnosti 2004/108/EC

Direktiva o niskonaponskoj opremi 2006/95/EC

Opisani proizvodi usklađeni su sa ključnim zahtjevima navedenih direktiva.

Predstavnik za Europu:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Holandija

Samo za unutarnju upotrebu.



□ [Български]

**Бележка относно съответствие с нормите на ЕС**

С настоящото LG Electronics декларира, че този продукт съответства на следните директиви.

R&TTE директива 1999/5/EC

EMC директива 2004/108/EC

Директива за НИСКО НАПРЕЖЕНИЕ  
2006/95/EC

Описаният по-горе продукт съответства на основните изисквания на посочените директиви.

Европейски представител:  
LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Нидерландия

За употреба само в закрити помещения.

□ [Česky]

**Prohlášení o shodě s legislativou EU**

Společnost LG Electronics tímto prohlašuje, že tento výrobek je ve shodě s následujícími směrnici.

Směrnice o radiokomunikačních a telekomunikačních koncových zařízeních  
1999/5/EC

Směrnice o elektromagnetické kompatibilitě  
2004/108/EC

Směrnice o nízkém napětí 2006/95/EC

Výše popisované produkty jsou v souladu se základními požadavky uvedených směrnic.

Zastoupení v Evropě:  
LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Nizozemsko

Pouze pro vnitřní použití.

□ [Dansk]

## EU-overensstemmelseserklæring

LG Electronics erklærer hermed, at dette produkt overholder følgende direktiver.

R&TTE-direktiv 1999/5/EC

EMC-direktiv 2004/108/EC

LOW VOLTAGE-direktiv 2006/95/EC

De produkter, der er beskrevet ovenfor, overholder de vigtigste krav i de angivne direktiver.

Europæisk repræsentant:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Holland

Kun til indendørs brug.

□ [Nederlands]

## Conformiteitsverklaring (EU)

LG verklaart hierbij dat dit product voldoet aan de volgende richtlijnen.

R&TTE-richtlijn 1999/5/EC

EMC-richtlijn 2004/108/EC

Laagspanningsrichtlijn 2006/95/EC

De hierboven genoemde producten voldoen aan de essentiële voorwaarden van de gespecificeerde richtlijnen.

Europees hoofdkantoor:

LG Electronics Inc. Krijgsman 1, 1186 DM  
Amstelveen, Nederland

Alleen voor gebruik binnen.

## □ [Eesti]

### EÜ vastavuskinnitus

Käesolevaga kinnitab LG Electronics, et see toode ühildub järg-miste direktiividega.

Raadioseadmete ja telekommunikatsioonivõrgu lõppseadmete direktiiv 1999/5/EÜ

Elektromagnetilise ühilduvuse direktiiv 2004/108/EÜ

MADALPINGESEADMETE direktiiv 2006/95/EÜ

Eelnimetatud tooted vastavad märgitud direktiivide oluliste nõuetele.

Euroopa esindus:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Holland

Kasutada ainult siseruumides.

## □ [Suomi]

### EU-vaatimustenmukaisuusilmoitus

LG Electronics vakuuttaa täten, että tämä tuote on seuraavien direktiivien mukainen.

R&TTE-direktiivi 1999/5/EC

EMC-direktiivi 2004/108/EC

LOW VOLTAGE -direktiivi 2006/95/EC

Edellä mainitut tuotteet ovat eriteltyjen direktiivien oleellisten vaatimusten mukaisia.

Edustaja Euroopassa:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Alankomaat

Vain sisäkäyttöön.

## □ [Français]

### Notice de conformité UE

LG Electronics atteste que ces produits est en conformité avec les Directives suivantes.

Directive 1999/5/CE des R&TTE

Directive 2004/108/CE EMC

Directive 2006/95/CE des appareils basse tension

Les produits décrits ci-dessus sont en conformité avec les exigences essentiels des directives spécifiées.

Représentant en Europe :

LG Electronics Inc. Krijgsman 1, 1186 DM  
Amstelveen, Pays-Bas

Usage intérieur uniquement.

## □ [Deutsch]

### EU-Konformitätserklärung

LG Electronics erklärt hiermit, dass dieses Produkt den folgenden Richtlinien entspricht:

R&TTE-Richtlinie 1999/5/EC

EMC-Richtlinie 2004/108/EC

Niederspannungsrichtlinie 2006/95/EC

Die oben beschriebenen Produkte entsprechen den grundlegenden Anforderungen der angegebenen Richtlinien.

Vertreter für Europa:

LG Electronics Inc. Krijgsman 1, 1186 DM  
Amstelveen, Niederlande

Nur zur Verwendung in Innenräumen.

□ [ΕΛΛΗΝΙΚΑ]

Δήλωση συμμόρφωσης E.E.

Η LG Electronics δηλώνει ότι το παρόν προϊόν συμμορφώνεται με τις εξής Οδηγίες:

Οδηγία 1999/5/EK περί Ραδιοεξοπλισμού και Τηλεπικοινωνιακού Τερματικού Εξοπλισμού (R&TTE)

Οδηγία 2004/108/EK περί Ηλεκτρομαγνητικής Συμβατότητας  
Οδηγία 2006/95/EK περί Χαμηλής Τάσης

Τα παραπάνω προϊόντα συμμορφώνονται με τις ουσιώδεις απαιτήσεις των ανωτέρω οδηγιών.

Ευρωπαϊκός αντιπρόσωπος:  
LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Ολλανδία

Μόνο για εσωτερική χρήση.

□ [Magyar]

EU megfelelőségi nyilatkozat

Az LG Electronics ezúton kijelenti, hogy a termék megfelel a következő irányelvek előírásainak:

1999/5/EK R&TTE irányelv  
2004/108/EK EMC irányelv  
2006/95/EK KISFESZÜLT SÉGŰ irányelv

A fentiekben bemutatott termékek teljesítik a megadott irányelvek alapvető előírásait.

Európai képviselő:  
LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Hollandia

Csak beltéri használatra.

□ [Italiano]

**Avviso di conformità EU**

LG dichiara che questo prodotto è conforme alle seguenti direttive.

Direttiva R&TTE 1999/5/CE

Direttiva EMC 2004/108/CE

Direttiva BASSA TENSIONE 2006/95/CE

I prodotti descritti sopra sono conformi ai requisiti essenziali delle direttive specificate.

Rappresentante europeo:

LG Electronics Inc. Krijgsman 1, 1186 DM  
Amstelveen, Paesi Bassi

Solo per uso interno.

□ [Қазақша]

**ЕО сәйкестік туралы ескертуі**

LG Electronics осы құжат арқылы бұл құрылғының мына директиваларға сай екенін мәлімдейді.

Радио және телекоммуникациялық жабдықтардың 1999/5/ЕС директивасы 2004/108/ЕС электромагниттік үйлесімділік директивасы

Төмен кернеулі жабдықтардың 2006/95/ЕС директивасы

Жоғарыда сипатталған өнімдер көрсетілген директивалардың негізгі талаптарына сай келеді.

Еуропадағы өкілдік:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Нидерланд

Тек ғимарат ішінде қолдануға арналған.

□ [Latviešu]

**Paziņojums par atbilstību ES direktīvām**

LG Electronics ar šo paziņo, ka šis izstrādājums atbilst turpmāk minētajām direktīvām.

R&TTE direktīva 1999/5/EK

Elektromagnētiskās savietojamības direktīva 2004/108/EK

Direktīva par zemspriegumu 2006/95/EK

Iepriekš aprakstītie izstrādājumi atbilst norādīto direktīvu būtiskajām prasībām.

Pārstāvniecība Eiropā:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Nīderlande

Tikai lietošanai telpās.

□ [Lietuvių k.]

**EB atitikties deklaracija**

„LG Electronics“ pareiškia, kad šis produktas atitinka tokias direktyvas.

R&TTE direktyvą 1999/5/EB

EMS direktyvą 2004/108/EB

Žemos įtampos direktyvą 2006/95/EB

Aukščiau įvardinti produktai atitinka nurodytų direktyvų esminius reikalavimus.

Atstovas Europoje:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Nyderlandai

Naudoti tik patalpose.

## □ [Македонски]

### Известување за усогласеност со ЕУ

LG Electronics јавно изјавува дека овој производ е во согласност со следните директиви.

R&TTE директива 1999/5/EC

EMC директива 2004/108/EC

Директива за НИЗОК НАПОН 2006/95/EC

Производите опишани погоре ги исполнуваат основните услови од посочените директиви.

Европски претставник:

LG Electronics Krijgsman 1, 1186 DM

Amstelveen, Холандија

За употреба само во затворени простории.

## □ [Norsk]

### Samsvarsmerknad for EU

LG Electronics erklærer herved at dette produktet er i henhold til de følgende direktivene.

R&TTE-direktiv 1999/5/EC

EMC-direktiv 2004/108/EC

Lavspenningsdirektiv 2006/95/EC

Produktene som beskrives ovenfor, overholder kravene i de angitte direktivene.

Europeisk representant:

LG Electronics Krijgsman 1, 1186 DM

Amstelveen, Nederland

Bare til innendørs bruk.



## □ [Polski]

### Deklaracja zgodności z normami UE

Firma LG Electronics niniejszym zaświadcza, że ten produkt spełnia wymagania poniższych dyrektyw.

Dyrektywa 1999/5/WE w sprawie urządzeń radiowych i końcowych urządzeń telekomunikacyjnych

Dyrektywa 2004/108/WE dotycząca kompatybilności elektromagnetycznej

Dyrektywa 2006/95/WE dotycząca sprzętu elektrycznego przeznaczonego do stosowania w określonych granicach napięcia

Powyżej wymienione produkty spełniają zasadnicze wymagania wymienionych dyrektyw.

Przedstawiciel na Europę:  
LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Holandia

Tylko do użytku wewnątrz pomieszczeń.

## □ [Português]

### Aviso de conformidade da UE

A LG Electronics declara por este meio que este produto está em conformidade com as seguintes Directivas.

Directiva R&TTE 1999/5/CE

Directiva relativa à compatibilidade electromagnética 2004/108/CE

Directiva para equipamentos de BAIXA TENSÃO 2006/95/CE

Os produtos acima descritos estão em conformidade com os requisitos essenciais das directivas especificadas.

Representante europeu:  
LG Electronics Inc. Krijgsman 1, 1186 DM  
Amstelveen, Holanda

Apenas para uso em espaços interiores.

□ [Română]

**Declarație de conformitate UE**

Prin prezenta, LG Electronics declară că acest produs este conform cu următoarele Directive.

Directiva R&TTE 1999/5/CE

Directiva EMC 2004/108/CE

Directiva pentru tensiune joasă 2006/95/CE

Produsul descris mai sus este conform cu cerințele esențiale ale directivelor specificate.

Reprezentant european:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Olanda

Doar pentru utilizare în interior.

□ [Русский]

**Уведомление о соответствии нормам ЕС**

Компания LG Electronics настоящим заявляет о том, что данное изделие соответствует следующим директивам.

Директива R&TTE 1999/5/EC

Директива EMC 2004/108/EC

Директива LOW VOLTAGE 2006/95/EC

Описанные выше изделия соответствуют основным требованиям указанных директив.

Представительство в Европе:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Нидерланды

Только для использования в помещении.

□ [Srpski]

**Napomena o usklađenosti sa standardima**

LG Electronics ovim izjavljuje da je ovaj proizvod usklađen sa sledećim direktivama:

R&TTE direktiva 1999/5/EC

EMC direktiva 2004/108/EC

NISKONAPONSKA direktiva 2006/95/EC

Prethodno opisani proizvodi usklađeni su s osnovnim zahtevima iz navedenih direktiva.

Evropski predstavnik:

LG Electronics Krijgsman 1, 1186 DM

Amstelveen, Holandija

Koristite samo u zatvorenom prostoru.

□ [Hrvatski]

**Napomena o sukladnosti s EU standardima**

LG Electronics ovim putem izjavljuje da je ovaj proizvod sukladan sljedećim Direktivama.

R&TTE direktiva 1999/5/EC

R&EMC direktiva 2004/108/EC

Direktiva o niskonaponskim uređajima 2006/95/EC

Gore opisan proizvod sukladan je osnovnim zahtjevima navedenih direktiva.

Zastupnik za Europu:

LG Electronics Krijgsman 1, 1186 DM

Amstelveen, Nizozemska

Korištenje isključivo u zatvorenom prostoru.

## □ [Slovenčina]

### Vyhlasenie o zhode pre oblasť EÚ

Spoločnosť LG Electronics týmto vyhlasuje, že tento výrobok dosahuje súlad s nasledujúcimi smernicami.

Smernica R&TTE 1999/5/ES

Smernica EMC 2004/108/ES

Smernica o slaboprúde 2006/95/ES

Vyššie popísané výrobky vyhovujú základným požiadavkám uvedených smerníc.

Európske zastupiteľstvo:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Holandsko

Len na použitie v interiéri.

## □ [Slovenščina]

### Izjava o skladnosti EU

LG Electronics izjavlja, da je ta izdelek v skladu z naslednjimi direktivami.

Direktiva 1999/5/ES o radijski opremi in telekomunikacijski terminalski opremi ter medsebojnem priznavanju skladnosti te opreme

Direktiva 2004/108/ES o elektromagnetni združljivosti

Direktiva 2006/95/ES o nizki napetosti

Zgoraj opisani izdelki izpolnjujejo bistvene zahteve navedenih direktiv.

Evropski zastopnik:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Nizozemska

Samo za uporabo v zaprtih prostorih.

□ [Español]

## Aviso de conformidad con la UE

Por la presente, LG Electronics declara que este producto cumple con las siguientes directivas.

Directiva sobre equipos radioeléctricos y equipos terminales de telecomunicación 1999/5/CE

Directiva sobre compatibilidad electromagnética 2004/108/CE

Directiva sobre baja tensión 2006/95/CE

Los productos descritos anteriormente cumplen con los requisitos esenciales de las directivas especificadas.

Representante europeo:

LG Electronics Inc. Krijgsman 1, 1186 DM  
Amstelveen, Países Bajos

Sólo para uso en interiores.

□ [Svenska]

## Meddelande om EU-regelefterlevnad

LG Electronics intygar härmed att den här produkten uppfyller följande gällande direktiv:

R&TTE-direktivet 1999/5/EG

EMC-direktivet 2004/108/EG

Lågspänningsdirektivet 2006/95/EG

Ovan nämnda produkter stämmer överens med de grundläggande kraven som anges i direktiven.

Europeisk representant:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Nederländerna

Används endast inomhus.

□ [Türkçe]

**AB Uygunluk Bildirimi**

LG Electronics, burada bu ürünün aşağıdaki Direktifler ile uyumlu olduğunu beyan eder.

R&TTE Direktifi 1999/5/EC

EMC Direktifi 2004/108/EC

DÜŞÜK VOLTAJ Direktifi 2006/95/EC

Yukarıda anlatılan ürünler, belirtilen direktiflerin gereklilikleri ile uyumludur.

Avrupa temsilciliği :

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Hollanda

Sadece kapalı alanda kullanım.

□ [Українська]

**Підтвердження відповідності  
стандартам ЄС**

Ця компанія LG Electronics підтверджує відповідність цього продукту вимогам директив, що перелічені нижче.

Директива R&TTE, 1999/5/EC

Директива EMC, 2004/108/EC

Директива НИЗЬКОЇ НАПРУГИ, 2006/95/EC

Описані вище продукти відповідають основним вимогам вказаних директив.

Уповноважена особа у Європі:

LG Electronics Krijgsman 1, 1186 DM  
Amstelveen, Нідерланди

Призначено лише для використання в приміщенні.

## Information for recycling (take-back offer)

This product may contain parts which could be hazardous to the environment.



It is important that this product be recycled after use.

LGE handles all waste products through an environmentally acceptable recycling method. There are several take-back and recycling systems currently in operation worldwide.

Many parts will be reused and recycled, while harmful substances and heavy metals are treated by an environmentally friendly method. If you want to find out more information about our recycling program, please contact your local LG vendor or a corporate representative of LG. and Information of Regional Take back Schemes can be found at :

<http://www.lg.com/global/sustainability/environment/take-back-recycling.jsp>

## ❑ Disposal of waste batteries (applicable in the European Union and other European countries with separate collection systems)



This symbol on the battery or on the packaging indicates that the battery provided with this product shall not be treated as household waste.

By ensuring these batteries are disposed of correctly, you will help prevent potentially negative consequences for the environment and human health which could otherwise be caused by inappropriate waste handling of the battery. The recycling of the materials will help to conserve natural resources.

In case of products that for safety, performance or data integrity reasons require a permanent connection with an incorporated battery, this battery should be replaced by qualified service staff only.

To ensure that the battery will be treated properly, hand over the product at end-of-life to the applicable collection point for the recycling of electrical and electronic equipment.



For all other batteries, please view the section on how to remove the battery from the product safely. Hand the battery over to the applicable collection point for the recycling of waste batteries.

For more detailed information about recycling of this product or battery, please contact your local authority, your household waste disposal service or the shop where you purchased the product.

## ❏ Energy Saving

Energy efficiency cuts energy consumption and thus saves money by reducing electricity bills.

The following indications allow to reduce power consumption when the television is not being watched:

- turning the television off at its mains supply, or un-plugging it, will cut energy use to zero for all televisions, and is recommended when the television is not being used for a long time, e.g. when on holiday,
- putting the television into standby mode, will reduce energy consumption, but will still draw some power,
- reducing the brightness of the screen will reduce energy use.