

HP LaserJet Enterprise 600 M601

Ideal for workgroups of 5 – 10 users in medium to small businesses that require a fast, reliable printer for high-volume document printing which offers advanced network management, increased paper capacity and security features.





HP LaserJet Enterprise 600 M601n



HP LaserJet Enterprise 600 M601dn

Keep your workflow moving with fast output and precision paper handling.

- Boost productivity with fast print speeds up to 43 ppm¹ and produce documents on a variety of media.
- Manage workflow directly from the printer via the 4-line colour control panel and get quick prints from a USB flash drive.
- Easily meet high-volume printing demands with automatic two-sided printing², a built-in 500-sheet paper tray, a 100-sheet multipurpose tray and capacity of up to 3,600 sheets³.
- Replace toner cartridges easily with simple one-door access and enjoy quiet, clean performance.

Achieve outstanding energy and paper savings.

- Control energy use with HP Auto-On/Auto-Off Technology⁴ which turns your printer on and off based on network activity. Instant-on Technology speeds warm-up/cool-down times, saving even more power⁵.
- Track usage data in real time and apply custom energy-saving options and printer settings with the HP EcoSMART Console⁶.
- Reduce paper use by up to 50% with automatic two-sided printing².
- Pre-installed Original HP toner cartridges reduce waste. Recycle them for free through HP Planet Partners⁷.

Create a more secure printing environment.

- Take control of printing practices and enforce security policies, using HP Access Control⁸.
- Command your printing environment and slash costs with HP Web Jetadmin, manage IT resources with the HP Universal Print Driver, and reduce environmental impact⁹.
- Enhance security on multiple networked devices: expand your network of IP addresses with IPv6, get fast authentication and encryption for sensitive data with IPSec security.
- Effectively manage compliance and security issues across your business.

Extend your print capabilities to keep pace with your growing business.

- Easily update, manage, and expand the capabilities of networked printers using HP FutureSmart Firmware.
- Do more with your investment: innovative extensibility simplifies the deployment of customised, HP and third-party workflow and document management solutions.
- Make printing as mobile as you are with HP ePrint now you can print from virtually anywhere¹⁰.
- Update multiple printers quickly and securely with 10/100 Ethernet networking and Hi-Speed USB 2.0.

¹ Measured using ISO/IEC 24734, excludes first set of test documents. For more information, see www.hp.com/go/printerclaims. Exact speed varies depending on the system configuration, software application, driver and document complexity.

² Automatic two-sided printing is only available on the HP LaserJet Enterprise 600 M601dn Printer. The Automatic Two-sided Printing Accessory may be purchased separately for the HP LaserJet Enterprise 600 M601n Printer.

 $^{^3}$ The 1 x 1,500-sheet high-capacity input tray may be purchased separately for the HP LaserJet Enterprise 600 M601 Printer series.

⁴ HP Auto-On/Auto-Off capabilities subject to printer and settings. Actual power usage may vary.

⁵ Compared with products that use traditional fusing.

⁶ Expected availability late 2011. May require a firmware upgrade.

⁷ Programme availability varies. Original HP cartridge return and recycling is currently available in more than 50 countries and territories around the world through the HP Planet Partners programme. For more information, or to request return envelopes and bulk collection boxes, visit www.hp.com/recycle.

⁸ HP Access Control must be purchased separately.


⁹ HP Web Jetadmin is free and can be downloaded at www.hp.com/go/webjetadmin. The HP Universal Print Driver is free and can be downloaded at www.hp.com/go/upd. HP EcoSMART Fleet must be purchased separately.

¹⁰ Requires an Internet connection to the printer. Feature works with any Internet- and e-mail-capable device. Print times may vary. For a list of supported documents and image types, see www.hp.com/go/eprintcenter. Some HP LaserJet products will require a firmware upgrade.

Product walkground

HP LaserJet Enterprise 600 M601dn:

- 1. Intuitive 4-line color display
- 2. Walkup USB port
- 3. Built-in automatic two-sided printing
- 4. Convenient front on/off switch
- 5. 500-sheet output bin
- 6. One-door access to install all in one toner cartridges
- 7. 100-sheet multipurpose tray 1 handles heavy custom media up to 53 lb bond
- 8. 500-sheet input tray 2 for a 600 sheet total input capacity
- 9. HP Jetdirect 10/100/1000Base-TX Ethernet embedded print
- 10. 512 MB total memory and an 800 MHz processor quickly handle complex print jobs
- 11. Hi-Speed USB 2.0 port

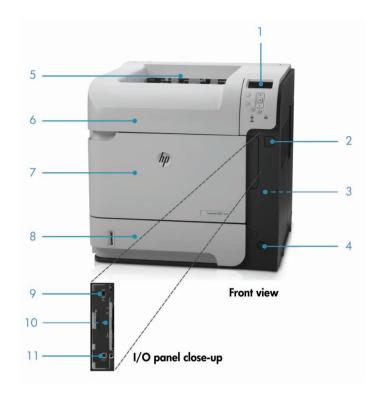

Series at a glance



HP LaserJet Enterprise 600 M601n

- \bullet up to 1200 x 1200 dpi effective output quality with HP ProRes 1200
- HP FastRes 1200
- 512 MB memory expandable to 1 GB
- 800 MHz processor
- 1 Gigabit Ethernet
- 1 Hi-Speed USB 2.0
- 2 External Host USB (1 walk-up and 1 external accessible)
- 2 internal Host USB 2.0-like ports (for 3rd party connection)
- 100-sheet multipurpose tray 1
- 500-sheet input tray 2



HP LaserJet Enterprise 600 M601dn

• HP LaserJet Enterprise 600 M601n Printer: print speed of up to 43 ppm black • HP LaserJet Enterprise 600 M601dn Printer: as base model with automatic two-sided printing

Recommended accessories



, , ,

HP LaserJet Automatic

Duplexer for Two-sided

HP LaserJet Automatic

Two-Sided Printing Units

The accessory prints both

automatically, so you can

important work. You'll see

paper consumption is cut in

budget savings because

save time, money and paper.

Printing Accessory

sides of the page

concentrate on more

CF062A



HP LaserJet 500-sheet Input Tray Feeder

HP LaserJet 500-sheet Paper Trays support the productivity of growing work groups with simple, robust paper input accessories that enable media versatility, from A4 to legal, and allow longer printing without reloading paper.



CE398A

Supplies

CE390A

HP LaserJet 1500-sheet Input Tray

HP LaserJet 1500-sheet Paper Trays support productivity. This robust paper input tray enables media versatility and allows longer printing (up to 1500 sheets) without re-loading paper.



CE405A

HP LaserJet 500-sheet Stapler/Stacker

HP LaserJet 500-sheet
Output Stackers improve
workflow management and
accommodate multiple users.
Monitor your printer less
frequently with convenient
automatic job stapling, sheet
stacking and sorting in the
additional output bin.



CE399A

HP LaserJet 75-sheet Envelope Feeder

HP LaserJet Envelope Feeders make business mailing simple, efficient and professional. Print directly to various sizes of envelopes including up to 75 Monarch to B5-sized envelopes.



CE997A

HP LaserJet 500-sheet 5-bin Mailbox

HP LaserJet 5-bin Mailboxes give you an additional output capacity of 500 pages for a total output of 1100 pages. This multifaceted accessory comes with four intelligent operating modes for improved workflow and offers convenient access to print jobs

Ordering information



HP LaserJet Enterprise 600 M601n (CE989A)

HP LaserJet Enterprise 600 M601n Printer; HP Black LaserJet Toner cartridge (~10,000 pages); Right-angled power cord; Software and documentation on CD-ROM; Getting Started Guide; Support flyer; HP ePrint flyer; Warranty Guide (where applicable); HP Jetdirect Gigabit Ethernet embedded print server; 100-sheet multipurpose tray 1; 500-sheet input tray 2



HP 90A Black Laserlet Toner Cartridae

HP LaserJet Enterprise 600 M601dn (CE990A)

HP LaserJet Enterprise 600 M601dn Printer; HP Black LaserJet Toner cartridge (~10,000 pages);Right-angled power cord; Software and documentation on CD-ROM; Getting Started Guide; Support flyer; HP ePrint flyer; Warranty Guide (where applicable); Automatic Duplexer Errata sheet; HP Jetdirect Gigabit Ethernet embedded print server; 100-sheet multipurpose tray 1; 500-sheet input tray 2; Automatic duplexer for two-sided printing

Accessories, Supplies and Support

Accessories	
CF062A	HP LaserJet Automatic Duplexer for Two-sided Printing
	Accessory
CE998A	HP LaserJet 500-sheet Input Tray Feeder
CE398A	HP LaserJet 1500-sheet Input Tray
CE405A	HP LaserJet 500-sheet Stapler/Stacker
CE399A	HP LaserJet 75-sheet Envelope Feeder
CE997A	HP LaserJet 500-sheet 5-bin Mailbox
CE404A	HP LaserJet 500-sheet Stacker
CB525A	HP LaserJet P4010/P4510 Series Printer Stand
CB527A	HP LaserJet 400-sheet Custom Media Cassette
Q3216A	HP 1000-staple Cartridge
CE483A	HP 512 MB 144-pin x32 DDR2 DIMM
Connectivity	,
J8026A	HP Jetdirect 2700w USB Wireless Print Server

CLO7OA	Average cartridge yields 10,000 standard pages. Declared yield based on ISO/IEC 19752 and continuous printing. Actual yields vary considerably based on
	images printed and other factors. For details see http://www.hp.com/go/learnaboutsupplies.
CF064A	HP LaserJet CF064A 110V Maintenance Kit 225,000 pages
CF065A	HP LaserJet CF065A 220V Maintenance Kit 225,000 pages
Media s	upplies
CHP310	HP LaserJet Paper-500 sht/A4/210 x 297 mm
CHP830	HP Recycled Paper 80 g/m²-500 sht/A4/210 x 297
	mm
CHP710	HP All-in-One Printing Paper-500 sht/A4/210 x 297
	mm

Service & support

HY579E - HP 3 year Next Business Day LaserJet M601 Hardware

HY583E - HP 3 year 4 hour 13x5 LaserJet M601 Harware Support HZ471E - HP 4 year Next Business Day LaserJet M601 Hardware

HZ472E - HP 5 year Next Business Day LaserJet M601 Hardware

Support **HZ474PE** - HP 1 year Post Warranty Next Business Day LaserJet

M601 Hardware Support

HZ476PE - HP 1 year Post Warranty 4 hour 13x5 LaserJet M601 Hardware Support

Hardware Support
HY581PE - HP 2 year Post Warranty Next Business Day LaserJet
M601 Hardware Support

UC742E - HP Network Install Mono Mid-range LaserJet Service
UZ048E - HP Autosend and network configure installation Mono
mid-range LaserJet

For a complete list of supplies, accessories and services, please refer to http://www.hp.com

Count on dependable support to create the best image possible. We can help you enhance your printing and imaging environment, protect your IT investment, and grow your business—with expert support that's affordable, personal, and tailored to your needs through HP Care Pack Services.



Technical specifications

	Laser	laser						
Print speed	First page out: As fast as 8.5 sec							
•	A4: Up to 43 pp	A4: Úp io 43 ppm						
		ne is measured from Tray 2. Exact speed varies depe						
				go/printerclaims. Exact speed varies depending on the				
		system configuration, software application, driver, and document complexity.						
Processor	,	800 MHz, ARM Cortex™-A8 superscalar processor						
Memory	/ 1	512 MB, Expandable to 1 GB through one 144-pin DDR2 DIMM slot, Hard disk capacity : None						
Print		Quality HP ProRes 1200, HP FastRes 1200, HP REt, 600 dpi, 300 dpi						
	Resolution							
	Printer languages							
	Typefaces/fonts	Typefaces/fonts 105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP Postscript Level 3 emulation (Euro symbol built-in); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal Windows Vista® 8 Fonts (Calibri, Cambria); additional font solutions available via third-party						
		Onicode ronis (Anadae Monto World ype), 2 internat Windows Visides o Fortis Califort, Carthorida, administrations available via intra-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at http://www.hp.com/qo/laserjetfonts						
	Duty cycle (month	Duty cycle (monthly, A4) Up to 175000 pages						
	Recommended mo							
	volume	, , ,						
	Print margins	Top: 6 mm, Left: 5 mm, Right: 5 mm, Bo						
Media handling	Input	Capacity	Weight	Size				
	Tray 1	sheets: 100; transparencies: 50; envelopes: 10	60 to 200 g/m ²	A4; A5; A6; B5 (JIS); B6 (JIS); RA4; 10 x 15 cm;				
				envelope (DL ISO, C5 ISO, C6 ISO, B5 ISO);				
	Tray 2	sheets: 500	60 to 120 g/m ²	custom 76 x 127 to 216 x 356 mm A4; A5; RA4; B5 (JIS); custom 148 x 210 to 216				
	irdy Z	sneels. 500	00 10 120 g/111-	x 356 mm				
	Tray 3	sheets: 500 (optional tray 3); sheets: 1500	60 to 120 g/m ²	A4; A5; RA4; B5 (JIS); custom 148 x 210 to 216				
	,	(optional High-capacity input tray)	<i>3</i> ,	x 356 mm (optional 500-sheet input tray)				
	Duplex printing:	M601n: Automatic (optional); M601dn:	M601n: 60 to 120 g/m² (with optional	M601n: A4; A5; B5 (JIS) (with optional				
		Automatic (standard);	duplexer); M601dn : 60 to 120 g/m²;	duplexer); M601dn : A4; A5; B5 (JIS);				
	Output:	•	bin, 100 in rear face up door). Envelopes: Up to					
Media types		our, letterhead, plain, preprinted, prepunched, recycled	d, rough, light), envelopes, labels, cardstock, trans	sparencies, shelf edge labels, user-defined				
Memory card compatibility	USB Flash drive							
Interface and connectivity		2.0; 1 Gigabit Ethernet; 2 External Host USB (1 walk-u						
Network protocols		IPv4/IPv6: Apple Bonjour Compatible (Mac OS v10.2.4 or higher), SNMPv1/v2c/v3, HTTP, HTTPS, FTP, TFTP, Port 9100, LPD, WS Discovery, IPP, Secure-IPP, IPsec/Firewall; IPv6: DHCPv6, MLDv1, ICMPv6; IPv4: Auto-IP, SLP, Telnet, IGMPv2, BOOTP/DHCP, WINS, IP Direct Mode, WS Print; Other: NetWare NDS, Bindery, NDPS, ePrint						
Operating systems compatibility				4-bit), Server 2008 R2 (64-bit); Mac OS X v10.5, v10.6;				
		dows® Terminal Services (see System Administrator's C						
		http://www.novell.com/iprint for latest support); Linux (see http://www.hplip.net); UNIX (see http://www.hp.com/go/unix, http://www.hp.com/go/unix, offware); SAP device types (see http://www.hp.com/go/sap/drivers and www.hp.com/go/sap/print)						
				np.com/go/sap/print) support/hpljm601 series; if no access to the Internet, see				
			erating systems available at http://www.np.com/	support/ ripilinoo i series, ii no access to me internet, see				
		support flyer that came in printer box						
Minimum system requirements	- '' '	aws® 7: Windows Vista®: Windows XP® (SP2 or hic	Microsoft® Windows® 7; Windows Vista®; Windows XP® (SP2 or higher), Server 2003 (SP1 or higher), Server 2008, Server 2008 R2: 200 MB available hard disk space; operating system compatible hardware system requirements, see http://www.microsoft.com, Mac OS X v10.5, v10.6; 150 MB available hard disk space; operating system					
Minimum system requirements	Microsoft® Windo							
Minimum system requirements	Microsoft® Windo		/www.microsoft.com, Mac OS X v10.5, v10.6; 1					
	Microsoft® Windo operating system o compatible hardw	compatible hardware system requirements, see http://	/www.microsoft.com, Mac OS X v10.5, v10.6; 1					
Software	Microsoft® Windo operating system o compatible hardw Windows® Install	compatible hardware system requirements, see http://www.apple.com	/www.microsoft.com, Mac OS X v10.5, v10.6; 1 n driver	50 MB available hard disk space; operating system				
Software Control panel	Microsoft® Windo operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4	compatible hardware system requirements, see http:// vare system requirements, see: http://www.apple.com ler, HP PCL 6 discrete driver; Mac Installer, Postscript c	/www.microsoft.com, Mac OS X v10.5, v10.6; 1 n driver	50 MB available hard disk space; operating system				
Software Control panel Printer management	Microsoft® Windo operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin	compatible hardware system requirements, see http:// vare system requirements, see: http://www.apple.com ler, HP PCL 6 discrete driver; Mac Installer, Postscript of Hine colour ICD display, 3 LED lights (Attention, Data n; HP SureSupply; HP Utility (Mac)	/www.microsoft.com, Mac OS X v10.5, v10.6; 1 a driver , Ready), buttons (Information, Stop/Cancel, Retur	50 MB available hard disk space; operating system				
Software Control panel Printer management	Microsoft® Windo operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; Su	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript chiene colour LCD display, 3 LED lights (Attention, Data, n; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plup	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with G g-in	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos				
Software Control panel Printer management Security management	Microsoft® Windo operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; Su Built-in power sup	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript c Hine colour LCD display, 3 LED lights (Attention, Data, n; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Pluply; Requirements: Input voltage: 100 to 127 VAC (+,	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with C g-in /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790				
Software Control panel Printer management Security management	Microsoft® Windo operating system operating system of compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; St. Built-in power sup watts (printing), 2	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com ler, HP PCL 6 discrete driver; Mac Installer, Postscript of Hine colour LCD display, 3 LED lights (Attention, Data no, HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 21 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-colour).	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with C g-in /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Cons	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790				
Software Control panel Printer management Security management	Microsoft® Windo operating system operating system ocompatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; St. Built-in power supwatts (printing), 2 Out of package: I	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript chile colour ICD display, 3 LED lights (Attention, Data, I; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plutyply; Requirements: Input voltage: 100 to 127 VAC (H) watts (standby), 5.5 watts (sleep), 1.0 watts (auto-cM601n: 415 x 428 x 398 mm; M601dn: 415 x 508	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Ogg-in /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC ff), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm;	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790				
Software Control panel Printer management Security management Power Dimensions (w x d x h)	Microsoft® Windo operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management secu Authentication; Su Built-in power sup watts (printing), 2 Out of package: M601r Packaged: M601r	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript of Line colour LCD display, 3 LED lights (Attention, Data, 17; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 lPsec Configuration using lPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 21 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-cambod). 415 x 428 x 398 mm; M601dn: 415 x 508 mc: 588 x 540 x 499 mm; M601dn: 588 x 633 x 499	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Ogg-in /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC ff), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm;	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790				
Software Control panel Printer management Security management Power Dimensions (w x d x h)	Microsoft® Windo operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; St. Built-in power sup watts (printing), 2 Out of packaged: Mo01r Out of package: 1	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript cler, HP PCL 6 discrete driver; Mac Installer, Postscript of Line colour LCD display, 3 LED lights (Attention, Data, n; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-cm M601n: 415 x 428 x 398 mm; M601n: 415 x 508 x 540 x 499 mm; M601di: 588 x 633 x 499 M601n: 23.7 kg; M601dn: 26.3 kg;	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Ogg-in /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC ff), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm;	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790				
Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight	Microsoft® Windo operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; St. Built-in power sup watts (printing), 2 Out of package: M601r Out of package: M601r Packaged: M601r Packaged: M601r	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript chine colour LCD display, 3 LED lights (Attention, Data 1); HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-cM601n: 415 x 428 x 398 mm; M601dn: 415 x 508 nr: 588 x 540 x 499 mm; M601dn: 588 x 633 x 499 M601n: 23.7 kg; M601dn: 26.3 kg; nr: 27.5 kg; M601dn: 30.1 kg;	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 n driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Og-in /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm; mm;	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 numption (TEC): 3.402 kWh/Week				
Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight	Microsoft® Windo operating system operating system operating system of the compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; St. Built-in power sup watts (printing), 2 Out of package: Mo01r Out of package: Mo01r Operating temper	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript c Hine colour LCD display, 3 LED lights (Attention, Data, n; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-c M601n: 415 x 428 x 398 mm; M601dn: 415 x 508 m: 588 x 540 x 499 mm; M601dn: 588 x 633 x 499 M601n: 23.7 kg; M601dn: 26.3 kg; n: 27.5 kg; M601dn: 30.1 kg; rature: 15 to 32°C. Recommended operating tempera	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 n driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Oggin /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm; mm; ture: 15 to 32°C. Operating humidity: 10 to 80%	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 rumption (TEC): 3.402 kWh/Week				
Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight Operating environment	Microsoft® Windo operating system ocompatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; St. Built-in power sup watts (printing), 2 Out of package: I Packaged: M601r Out of package: I Packaged: M601r Operating temper Storage temperatus	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript celline colour ICD display, 3 LED lights (Attention, Data, it) HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input vollage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (autocom/601n: 415 x 428 x 398 mm; M601dn: 415 x 508 ns: 588 x 540 x 499 mm; M601dn: 23.7 kg; M601dn: 26.3 kg; m: 27.5 kg; M601dn: 30.1 kg; rature: 15 to 32°C. Recommended operating temperaure: -30 to 60°C. Storage humidity: 10 to 90% RH. N	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 n driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Oggin /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm; mm; ture: 15 to 32°C. Operating humidity: 10 to 80%	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 rumption (TEC): 3.402 kWh/Week				
Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight Operating environment	Microsoft® Windo operating system operating system compatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management secundary secunda	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript of Line colour LCD display, 3 LED lights (Attention, Data, 1); HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 1) watts (standby), 5.5 watts (sleep), 1.0 watts (auto-centre) was seen to see the seen to see t	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 n driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Oggin /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm; mm; ture: 15 to 32°C. Operating humidity: 10 to 80%	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 rumption (TEC): 3.402 kWh/Week				
Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight Operating environment Acoustics	Microsoft® Windo operating system ocompatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; St. Built-in power sup watts (printing), 2 Out of package: Packaged: M601r Operating temperat Storage temperatt. Acoustic Pressure	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript cler, HP PCL 6 discrete driver; Mac Installer, Postscript cler, HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-cM601n: 415 x 428 x 398 mm; M601dn: 415 x 508 n: 588 x 540 x 499 mm; M601dn: 588 x 633 x 499 M601n: 23.7 kg; M601dn: 26.3 kg; n: 27.5 kg; M601dn: 30.1 kg; rature: 15 to 32°C. Recommended operating tempera ure: -30 to 60°C. Storage humidity: 10 to 90% RH. N missions: 6.9 B(A) Emissions: 56 dB(A)	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver, Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Cg-in /- 10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Cons x 398 mm; mm; ture: 15 to 32°C. Operating humidity: 10 to 80% loise level per ISO 9296: Sound power: LwAd6.9	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 rumption (TEC): 3.402 kWh/Week RH. Recommended operating humidity: 10 to 80% RH. B(A)				
Minimum system requirements Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight Operating environment Acoustics Product certifications	Microsoft® Windo operating system operating system operating system of the compatible hardways install 2.29 x 5.33 cm 4 HP Web Jetadmin Management sect Authentication; Subuilt-in power supwatts (printing), 2 Out of package: Package: M601r Out of package: M601r Operating temper Storage temperature Acoustic Pressure Safety certification	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript cler, HP PCL 6 discrete driver; Mac Installer, Postscript of Line colour LCD display, 3 LED lights (Attention, Data, n; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input voltage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-compatible), which was a system with the second of	Awww.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver, Ready), buttons (Information, Stop/Cancel, Return Ready), buttons (Information, Stop/Cancel, Return Ready), buttons (Information, Stop/Cancel, Return Ready), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Consist x 398 mm; mm; ture: 15 to 32°C. Operating humidity: 10 to 80% to see level per ISO 9296: Sound power: LwAd6.9	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 numption (TEC): 3.402 kWh/Week RH. Recommended operating humidity: 10 to 80% RH.				
Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight Operating environment Acoustics	Microsoft® Windo operating system operating system operating system operating system operating system operating system of the system of the system of the system of the system operating system operating system operating operating temper Storage temperating the system operating temper Storage temperating the system operating temper Storage temperating operating temper Storage temperating operating temper Storage temperating temper Storage temperating operating temper Storage temperating operating temper Storage temperating operating operating operating operating operating operating operating system operating system operating operating system oper	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript of Line colour ICD display, 3 LED lights (Attention, Data, i; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input vollage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-om/doln: 415 x 428 x 398 mm; M601dn: 415 x 508 ns: 588 x 540 x 499 mm; M601dn: 588 x 633 x 499 M601n: 23.7 kg; M601dn: 26.3 kg; ms: 27.5 kg; M601dn: 30.1 kg; rature: 15 to 32°C. Recommended operating tempera ure: -30 to 60°C. Storage humidity: 10 to 90% RH. N missions: 6.9 B(A) Emissions: 56 dB(A) ms: IEC 60950-1 (International); EN 60950-1 +A11 (If the CE Marking (Europe); other safety approvals as req	www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Cg-time (10%), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC (10%), 50/60 Hz (+/- 3 Hz); 220 to 2	50 MB available hard disk space; operating system In, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 numption (TEC): 3.402 kWh/Week RH. Recommended operating humidity: 10 to 80% RH. B(A) 5-1 (Class 1 Laser/LED Device); Low Voltage Directive				
Software Control panel Printer management Security management Power Dimensions (w x d x h) Weight Operating environment Acoustics	Microsoft® Windo operating system ocompatible hardw Windows® Install 2.29 x 5.33 cm 4 HP Web Jetadmin Management secu Authentication; Su Built-in power sup watts (printing), 2 Out of package: I Packaged: M601r Operating temper Storage temperature Acoustic Power En Acoustic Pressure Safety certification 2006/95/EC wit EMC certifications	compatible hardware system requirements, see http://ware system requirements, see: http://www.apple.com/ler, HP PCL 6 discrete driver; Mac Installer, Postscript of Line colour ICD display, 3 LED lights (Attention, Data, i; HP SureSupply; HP Utility (Mac) urity: SNMPv3, SSL/TLS, 802.1X authentication (EAP-upport for WJA-10 IPsec Configuration using IPsec Plupply; Requirements: Input vollage: 100 to 127 VAC (+, 11 watts (standby), 5.5 watts (sleep), 1.0 watts (auto-om/doln: 415 x 428 x 398 mm; M601dn: 415 x 508 ns: 588 x 540 x 499 mm; M601dn: 588 x 633 x 499 M601n: 23.7 kg; M601dn: 26.3 kg; ms: 27.5 kg; M601dn: 30.1 kg; rature: 15 to 32°C. Recommended operating tempera ure: -30 to 60°C. Storage humidity: 10 to 90% RH. N missions: 6.9 B(A) Emissions: 56 dB(A) ms: IEC 60950-1 (International); EN 60950-1 +A11 (If the CE Marking (Europe); other safety approvals as req	/www.microsoft.com, Mac OŠ X v10.5, v10.6; 1 driver , Ready), buttons (Information, Stop/Cancel, Return Ready), buttons (Information, Stop/Cancel, Return Ready), buttons (Information, Stop/Cancel, Return Ready), 50/60 Hz (+/- 3 Hz); 220 to 240 VAC off), 0.3 watts (manual-off); Typical Electricity Consist x 398 mm; mm; ture: 15 to 32°C. Operating humidity: 10 to 80% loise level per ISO 9296: Sound power: LwAd6.9 EU); IEC 60825-1; GS License (Europe); EN 6082 upired by individual countries N 61000-3-2: 2006, EN 61000-3-3: 2008, EN 51000-3-3: 2008, EN 510000-3-3: 2008, EN 51000-3-3: 2008, EN 510000-3-3: 2008, EN 510000-3-3: 2008, EN 51000-3-3: 2008, EN 510000	50 MB available hard disk space; operating system rn, Home, Folder, Left Arrow), No numeric keys Certificate, Pre-Shared Key Authentication, and Kerberos (+/- 10%), 50/60 Hz (+/- 3 Hz). Consumption: 790 rumption (TEC): 3.402 kWh/Week RH. Recommended operating humidity: 10 to 80% RH. B(A)				

ecohighlights

- $\bullet\,$ Save energy HP Auto On/Auto Off Technology turns your printer on when you need it and off when you don't¹.

 Save paper by up to 50% using automatic two-sided printing.

 Free, convenient cartridge recycling in 54 countries.

ENERGY STAR® qualified
HP LaserJet Enterprise 600 M601n Printer is not ENERGY STAR® compliant

1 HP Auto-On and Auto-Off capabilities subject to printer and settings.
Please recycle your computing hardware and printing supplies. HP asset management and recycling services make responsible disposal deays.











