Jabra®

YOU'RE ON

JABRA STORM
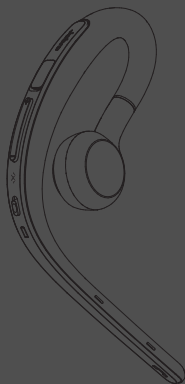
User Manual

jabra.com/storm

A BRAND BY

GN Netcom

Made in China

MODEL: BTE7
FCC ID: BCE-BTE7
IC: 2386C-BTE7

xxx-xxx   xxxxxxxxxxxxxxx

Bluetooth®

Declaration of Conformity can be found on
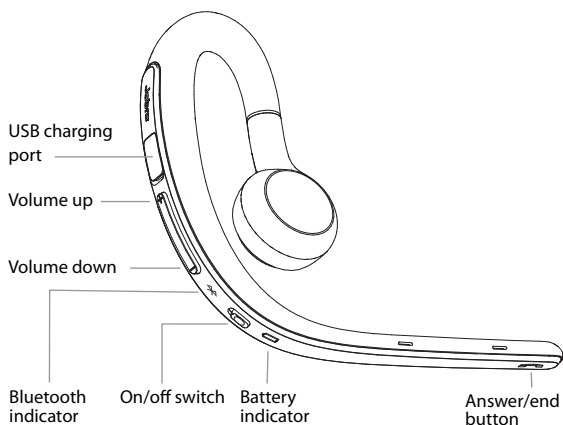www.jabra.com/CP/US/declarations-of-conformity

CONTENTS

1. WELCOME

Thank you for using the Jabra Storm. We hope you will enjoy it!

JABRA STORM FEATURES

- Voice guidance & control
- Wind Noise Blackout
- Long talk time – Up to 10 hours
- NFC for easy pairing

2. HEADSET OVERVIEW

USB charging port

Volume up

Volume down

Bluetooth indicator

On/off switch

Battery indicator
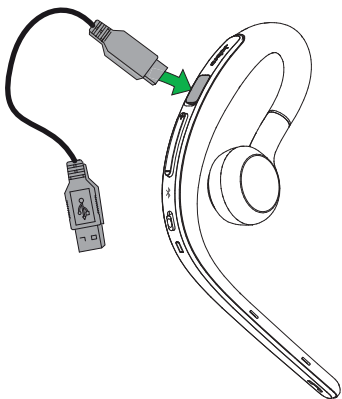
Answer/end button

3. HOW TO WEAR

The headset can be worn on the left or right ear. Simply rotate the speaker and twist the eargel to fit your ear.

4. HOW TO CHARGE THE BATTERY

Pull open the charging cover to expose the USB charging port.

NOTE: For safety reasons, it is recommended not to use the headset while it is charging.

It takes approx. 2 hours to fully charge the battery.

5. HOW TO CONNECT

5.1 CONNECT TO MOBILE DEVICE

1. Turn the headset on (set the **On/off** switch to the On position).
2. Press and hold (3 secs) the **Answer/end** button until the Bluetooth indicator flashes blue. Pairing mode will be announced in the headset.
3. Wear the headset and follow the voice-guided pairing instructions to pair to your Bluetooth device.
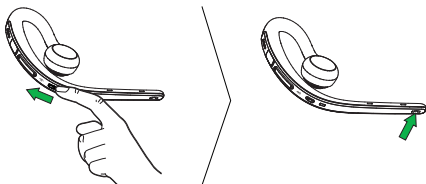
5.2 CONNECT TO MOBILE DEVICE (NFC)

1. Ensure that NFC is enabled on your mobile device.

2. Slowly slide the **NFC zone** of the headset against the **NFC zone** of the mobile device until a connection is confirmed.

6. HOW TO USE

USB charging port

Volume up

Volume down

Bluetooth indicator

On/off switch

Battery indicator

Answer/ end button
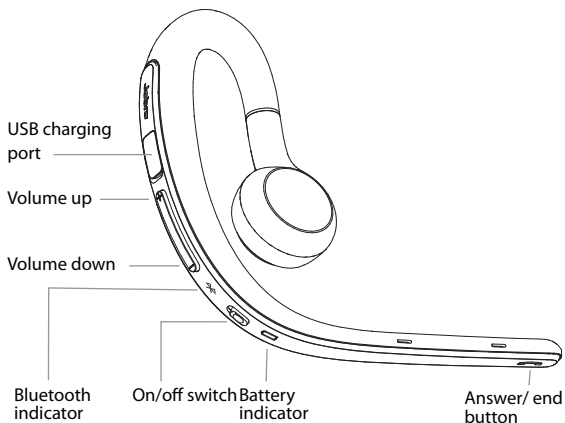
FUNCTION	ACTION
On/off	Slide the **On/off** switch
Answer call	Tap the **Answer/End** button, or say 'Yes'
End call	Tap the **Answer/End** button
Reject call	Press and hold (1 sec) the **Answer/End** button, or say 'No'
Redial last number	Double-tap the **Answer/End** button when not on a call
Activate voice dialing (e.g. Siri)	Press and hold (1 sec) the **Answer/End** button, when not on a call
Adjust speaker volume	Tap the **Volume up** or **Volume down** button
Mute/unmute	Tap both the **Volume up** or **Volume down** button at the same time

6.1 MULTIPLE CALL HANDLING

The headset can accept and handle multiple calls simultaneously.

FUNCTION	ACTION
End current call and answer incoming call	Tap the **Answer/End** button
Switch between held call and active call	Press and hold (2 secs) the **Answer/End** button
Put current call on hold and answer incoming call	Press and hold (2 secs) the **Answer/End** button
Reject incoming call	Double-tap the **Answer/End** button

6.2 LIST OF VOICE GUIDANCE

CLICK TO LISTEN	WHAT YOU HEAR
	Connected
	Battery low
	Redialling
	Disconnected
	To connect your headset, go to the Bluetooth menu on your phone and select it from the list
	To answer call say 'yes' or 'no'

7. SOFTWARE

7.1 JABRA ASSIST

Jabra Assist is a smartphone app that enables GPS tracking of the headset, pairing assistance, and headset battery status.

Download the latest version

- Android download - Google Play
- iOS download - App Store

8. SUPPORT

8.1 FAQ

View the comprehensive FAQ on Jabra.com/Storm

8.2 HOW TO CARE FOR YOUR HEADSET

- Always store the headset with the power off and safely protected.
- Avoid storage at extreme temperatures (above 70°C/158°F or below -20°C/-4°F). This can shorten battery life and may affect headset operation.
- Do not expose the headset to rain or other liquids.

9. TECHNICAL SPECIFICATIONS

JABRA STORM HEADSET	SPECIFICATION
Weight:	7.9g
Dimensions:	H 61.82 mm x W 83.71 mm x D 19.5 mm
Microphones:	Omni-directional microphone
Speaker:	Dynamic speaker
Operating range:	30m (98ft)
Bluetooth version:	4.0
Paired devices:	Up to 8, connected to two at the same time (MultiUse™)
Supported Bluetooth profiles:	A2DP (v1.2), Hands Free Profile (v1.6), Headset profile (v1.2), Phone book access profile (v1.0)
Talk time:	Up to 10 hours
Standby time:	Up to 10 days
Operating temperature:	-10°C to 55°C (14°F to 131°F)
Storage temperature:	-20° C to 70°C (-4°F to 158°F)
Pairing passkey or PIN:	0000

REV A