

GCL1900W

18.5" Widescreen Short Depth LCD Console with Audio (TAA Compliant)




- Integrated LCD KVM console with 18.5" widescreen LCD monitor
- Single rail housing with top & bottom clearance for smooth operation in a 1U high system rack
- LCD monitor supports resolution of 1366 x 768 @60Hz
- Short depth design allows for rack-mounting in narrow spaces
- Supports VGA video input; supports an external console with USB/VGA connectors

18.5" Widescreen Short Depth LCD KVM Console

IOGEAR's GCL1900W, 18.5" Widescreen LCD KVM Console, offers a space-saving, streamlined approach to IT environments by integrating a 18.5" widescreen LCD monitor, keyboard, and touchpad in one unit. The LCD drawer supports an external USB mouse and external console ports for added flexibility.

- | | |
|--|--|
| <ul style="list-style-type: none"> • Integrated LCD KVM console with 18.5" widescreen LCD monitor • Single rail housing with top & bottom clearance for smooth operation in a 1U high system rack • LCD monitor supports resolution of 1366 x 768 @60Hz • Short depth design allows for rack-mounting in narrow spaces • Supports VGA video input; supports an external console with USB/VGA connectors • Built-in USB Type-A port on front panel for peripheral sharing • Supports 2.1 audio | <ul style="list-style-type: none"> • Console lock design enables the console drawer to remain securely locked away in position when not in use • Console selection via hotkey • Multilingual keyboard mapping supports English (US), English (UK), French, German, German (Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, Turkish and Traditional Chinese • Standard rack mount kit included • Plug-n-Play • Firmware upgradable • Hot pluggable |
|--|--|



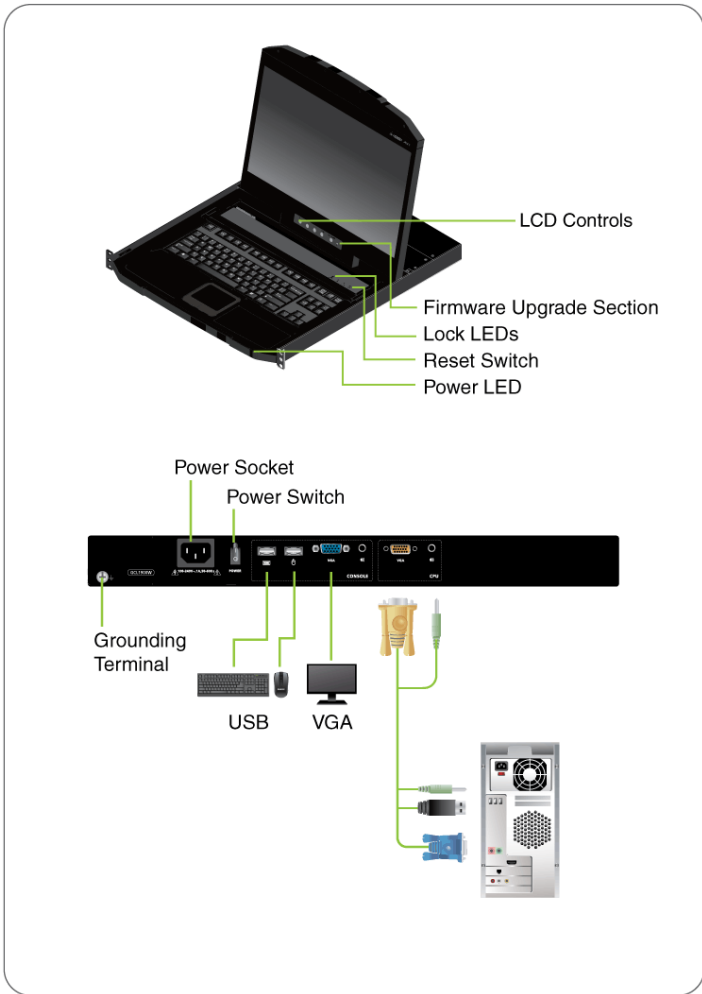

Requirements

Package Contents

Computers:

- VGA, SVGA, or MultiSync video graphics card with an HDB-15 port
- USB mouse and keyboard ports (6-pin mini DIN) or 1 USB port

- 1 x 18.5" Widescreen Short Depth LCD KVM Console
- 1 x USB KVM Cable
- 1 x Firmware Upgrade Cable
- 1 x Grounding Wire
- 1 x Standard Rackmount Kit
- 1 x Power Cord
- 1 x Quick Start Guide

Specifications

Function	GCL1900W
Computer Connections	
Direct	1
Connectors	
Power	1 x 3-Prong AC Socket
Computer/KVM	1 x SPHD Female (Yellow) 1 x 3.5 mm Audio Jack Female (Green)
USB-A	1
External Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female 1 x 3.5 mm Audio Jack Female (Green)
Switches	
F/W Upgrade	1 x Slide Switch
Power	1 x Rocker Switch
Reset	1 x Semi-recessed Pushbutton
LCD Power	1 x Pushbutton
LCD Adjustment	4 x Pushbutton
Emulation	
Keyboard	USB
Mouse	USB
Video Resolution	
	Input Resolution: 1920 x 1200 @60 Hz
Power	
Amps	100-240 V AC, 50-60Hz, 1A
Panel Spec	
Contrast Ratio	700:1
LCD Module	18.5" TFT-LCD
Luminance	200cd/m ²
Resolution	1366 x 768 @60 Hz
Response Time	5 ms
Support Color	16.7M colors
Viewing Angle	170° (H), 160° (V)
Environment	
Storage Temperature	-20?60 C
Operation Temperature	0?40 C
Humidity	0?80% RH Non-condensing
Housing	
Case	Metal + Plastic

Dimensions	GCL1900W
Physical Properties	
Unit Weight	20.0 lb
Housing	Metal
Unit Dimension	18.9 x 18.8 x 1.7 in
Case Qty	1
Case Weight	27.0 lb.
Case Dimension	24.3x 26x 5.5 in.