

NEW PELICAN-HARDIGG™ V-SERIES RACK MOUNT CASES



**IN STOCK
AND READY TO
ROCK**





INTRODUCING PELICAN-HARDIGG™ V-SERIES

THE OFF-THE-SHELF RACK MOUNT CASE WITH PRO-GRADE FEATURES.

Gearing up for an event? Now you can get pro-grade rack mount cases in days instead of weeks, guaranteed! Other rackcase makers claim to be fully stocked, but don't be surprised if your case order is delayed. Plus, only Pelican maintains inventory on both coasts, reducing your freight cost and transit time.



Pelican-Hardigg™ V-Series Cases are built utilizing a full-boxed 19" steel rack with a industry-standard square hole pattern, so hanging electronics with tab mounts is a snap. These cases also



include clip nuts- just attach the clip nut onto a square hole and you've got a secure, threaded mount. We even ship the case with your choice of 10-32 Imperial or M6 Metric clip-nuts.

VIBRATION IS YOUR ENEMY.

Drops and impact are an obvious no-no with electronics, but vibration puts damaging repetitive stress on delicate parts and soldered joints. That's why you'll find 8 heavy duty rubber shock mounts to isolate the frame inside the shell. The polymer outer shell absorbs impacts, and the shock mount inside dissipates residual movement. Rack mount cases without shock mounts transfer impact forces directly to the electronics inside.



CLASSIC-V VS. SUPER-V:

What's the difference? We've drawn on decades of rack mount case experience to produce two tiers of performance.

The Pelican-Hardigg™ Classic-V Series has a 33" depth

frame and has longer shock mounts and a larger sway space between the rack and shell. This case also has 4 removable heavy-duty casters and stainless steel handles. Extra insurance if your equipment frequently ships via freight services.

The Pelican-Hardigg™ Super-V Series has a 24" deep frame and uses shorter shock mounts for compact case dimensions. This case uses edge casters - just grab the Comfort-Grip Handles and you're ready to roll.

Mating columnar ribs create a rigid shell and also provide secure stacking of same-size cases.



You'll also find a manual purge valve, so air pressure in the case can be equalized to the atmosphere. This prevents vacuum-lock that can make opening the case difficult. Lids include a fully sealed O-ring gasket that

works with the purge valve to make the case fully watertight.

These features may seem extraordinary, but we've learned that water and electronics don't mix.



Look for detailed dimensions and features on the following pages, and please visit Pelican.com/racks for a video demonstration and to locate a dealer near you.

SHARED FEATURES

All Pelican-Hardigg™ Classic-V and Super-V Series are rated for equipment loads up to 170 lbs.,



PELICAN-HARDIGG™
24" SUPER-V
RACK MOUNT CASE

PELICAN-HARDIGG™ **33" CLASSIC-V** RACK MOUNT CASE



Stainless steel retractable handles



4 Removable heavy duty bottom casters



Molded Comfort Grip Handles are easy to use with gloves



Molded in edge casters are always ready to go and allow case stacking without removing casters

33" CLASSIC-V RACK MOUNT CASE

FOR ULTRA FRAGILE EQUIPMENT

SHARED FEATURES

A: LID HANGER

Keeps lids attached to case while case is open

B: MOLDED-IN STACKING RIBS

Secure non-slip stacking on matched size cases

C: DOUBLE WALLED RIM FOR TONGUE-IN-GROOVE SEAL

Remains sealed after impact, splash, rain, air and watertight resistant

D: POSITIVE ANTI-SHEAR LOCKS

Prevents lid separation upon impact

E: BLACK HARDWARE

Non-reflective black hardware eliminates glare in bright environments

F: COUPLING CATCHES

Attaching system for secure stacking

G: PRESSURE RELEASE VALVE

Regulates air pressure

H: COLUMNAR STRENGTH

Molded-in ribs provide extra columnar strength

I: REINFORCED CORNERS AND EDGES

15% to 20% Thicker corners and edges for added impact protection

J: SHOCK MOUNTS

Shock mounts provide excellent shock and vibration cushion for delicate equipment

K: RECESSED HARDWARE


Hardware protected from impact, and snag free transport

L: SQUARE HOLE 19" RACK FRAME (WIDTH)

Fixed square hole frame for universal equipment fit

M: PATENTED METAL INSERTS

Catch and hinge attachment points distribute load to case walls

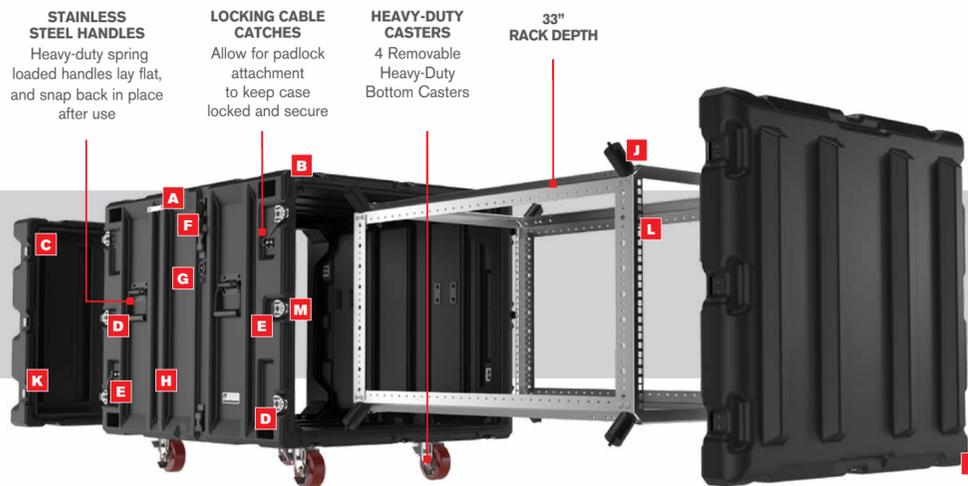

STAINLESS STEEL HANDLES
Heavy-duty spring loaded handles lay flat, and snap back in place after use

LOCKING CABLE CATCHES
Allow for padlock attachment to keep case locked and secure


HEAVY-DUTY CASTERS
4 Removable Heavy-Duty Bottom Casters

33" RACK DEPTH

CAT NO.	RACK HEIGHT U SIZE			RACK LENGTH		RACK WIDTH		LID I.D. FRONT/BACK ¹	LENGTH O.D. ²		WIDTH O.D.		HEIGHT O.D. ³		WEIGHT		SHIPPING CUBE	
	U	in	mm	in	mm	in	mm		in	mm	in	mm	in	mm	lbs	kg	ft3	m3
CLASSIC-V-3U	3U	5.25	133	33	838	19	483	25 / 5.25	45.8	1163	270	686	12.3	311	51.0	23.1	8.8	0.25
CLASSIC-V-4U	4U	7.00	178	33	838	19	483	25 / 5.25	45.8	1163	270	686	14.6	371	54.0	24.5	10.5	0.30
CLASSIC-V-5U	5U	8.75	222	33	838	19	483	25 / 5.25	45.8	1163	270	686	16.6	422	56.0	25.4	11.9	0.37
CLASSIC-V-7U	7U	12.25	311	33	838	19	483	25 / 5.25	45.8	1163	270	686	20.6	524	65.0	29.5	14.7	0.42
CLASSIC-V-9U	9U	15.75	400	33	838	19	483	25 / 5.25	45.8	1163	270	686	24.3	616	72.0	32.7	17.4	0.49

24" SUPER-V RACK MOUNT CASE

FOR MODERATELY FRAGILE EQUIPMENT

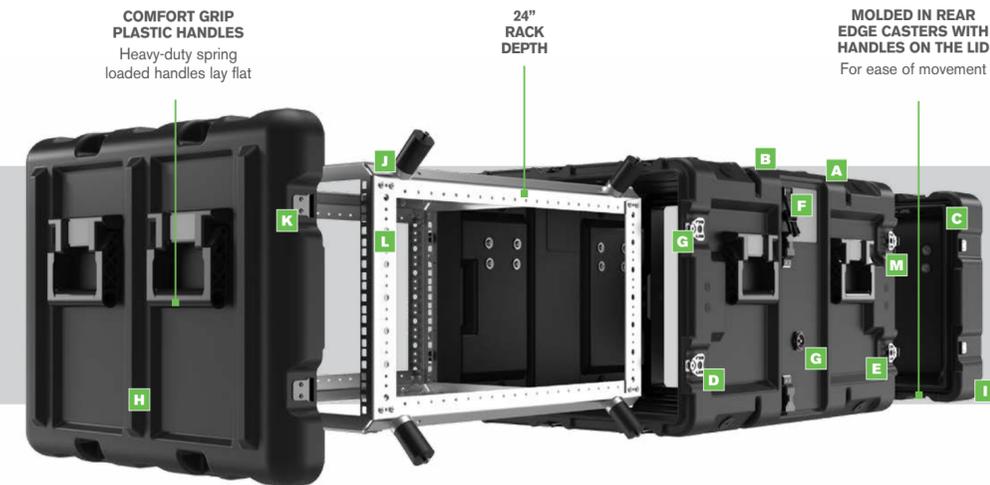

COMFORT GRIP PLASTIC HANDLES
Heavy-duty spring loaded handles lay flat


24" RACK DEPTH

MOLDED IN REAR EDGE CASTERS WITH HANDLES ON THE LID
For ease of movement

CAT NO.	RACK HEIGHT U SIZE			RACK LENGTH		RACK WIDTH		LID I.D. FRONT/BACK ¹	LENGTH O.D. ²		WIDTH O.D. ³		HEIGHT O.D. ³		WEIGHT		SHIPPING CUBE	
	U	in	mm	in	mm	in	mm		in	mm	in	mm	in	mm	lbs	kg	ft3	m3
SUPER-V-3U	3U	5.25	133	24	610	19	483	22 / 5.2	38.5	978	28.3	603	11.4	289	50	22.7	6.0	0.17
SUPER-V-4U	4U	7.00	178	24	610	19	483	22 / 5.2	38.5	978	28.3	603	13.1	333	53	24.0	6.9	0.20
SUPER-V-5U	5U	8.75	222	24	610	19	483	22 / 5.2	38.5	978	28.3	603	14.9	378	55	24.9	7.9	0.22
SUPER-V-7U	7U	12.25	311	24	610	19	483	22 / 5.2	38.5	978	28.3	603	18.4	467	60	27.2	9.7	0.28
SUPER-V-9U	9U	15.75	400	24	610	19	483	22 / 5.2	38.5	978	28.3	603	21.9	556	64	29.0	11.6	0.33
SUPER-V-11U	11U	19.25	489	24	610	19	483	22 / 5.2	38.5	978	28.3	603	25.4	644	69	31.3	13.4	0.38
SUPER-V-14U	14U	24.50	622	24	610	19	483	22 / 5.2	38.5	978	28.3	603	30.6	778	74	33.6	16.2	0.46

PELICAN-HARDIGG® 33" CLASSIC-V RACK MOUNT CASES

PELICAN-HARDIGG® 24" SUPER-V RACK MOUNT CASES

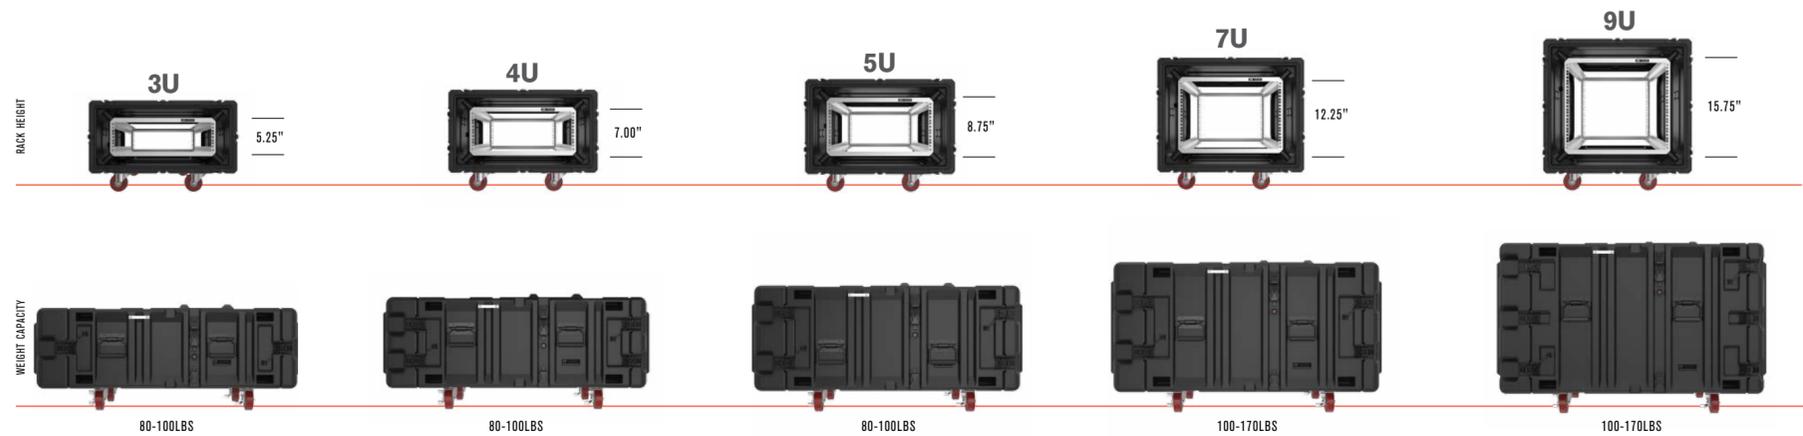

¹ Lid Outside Dimensions (O.D.) = Lid I.D. plus 1.25" per lid, ² Length Includes Stacking Ribs, ³ Height Excludes 1" Stacking Ribs (44" on Super-V), * Width of all cases includes attached standard handles.

**TO SEE THE FULL LINE OF RACK MOUNT CASES
GO TO: PELICAN.COM/RACKS**



Classic Rack



SuperMac™



Mac Rack™



Black Box



ProRack™

ROTO MOLDED CASES

PELICAN 1 YEAR LIMITED WARRANTY FOR ROTO MOLDED CONTAINERS

Pelican Products, Inc. ("Pelican") guarantees to the original purchaser of its rotationally molded containers that its containers will be free of defects in materials and workmanship for a period of one year from the date of invoice. Such warranty does not cover any associated hardware including closure hardware, retractable handles, wheels, and fasteners, which Pelican warrants against defects in materials and workmanship for a period of 90 days from the invoice date. To the extent permitted by law, Pelican's liability is limited to the case and not its contents or foam. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

For complete warranty details, see <http://www.pelican.com/warranty>

©2016 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.
Part. No. 0030-006-900 FE/16

MASSACHUSETTS
147 North Main Street
South Deerfield, MA 01373
Tel: 800.542.7344
Fax: 413.665.8330
www.pelican.com

