



Cutting Edge Thin & Zero Clients

Model Number: V1200-P

V1200-P Zero Client for VMware Tera2 PCoIP Portal Processor

The 10ZiG V1200-P is a next-generation Tera2 PCoIP Zero Client, supporting the efficiency and security of centralized computing and offering a truly uncompromised desktop experience. The V1200-P's latest chipset (Tera2 PCoIP Portal Processor) delivers a powerful, secure and easy to manage PCoIP Zero Client. This Zero Client offers a seamless solution with dynamic features and performance that will meet the growing needs of any expanding VDI environment.

Specifically designed with a small carbon footprint, the V1200-P only consumes 7 Watts of power on average. This Zero Client delivers high-end user elements. With four USB ports, rich multimedia playback, HD audio and multiple monitor support, the V1200-P is the perfect fit for any VMware VDI environment.

A three year advance exchange warranty comes standard with this unit, including free technical support and software upgrades. In addition, this unit comes with our fully free management console, the 10ZiG Manager with cloud technology.



► Tera2 PCoIP Portal Processor

► 1x (2560x1600) 2x (1920x1200)

► Dual Monitor Support Standard

► Optional Fiber Connectivity

► Optional POE Available

► Free Centralized Management

► Rich Multimedia Experience

► TAA Compliant

vmware

teradici
PCoIP

CITRIX

HDX

Microsoft

amazon
web services™

Americas
EMEA
APAC

P: (866) 865-5250
P: +44 (0) 116 214 8650
P: 1300 768 799


E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au

W: www.10ZiG.com
LN: 20170331

10ZiG

V1200-P Zero Client

TERA2 PCoIP Zero Client Series

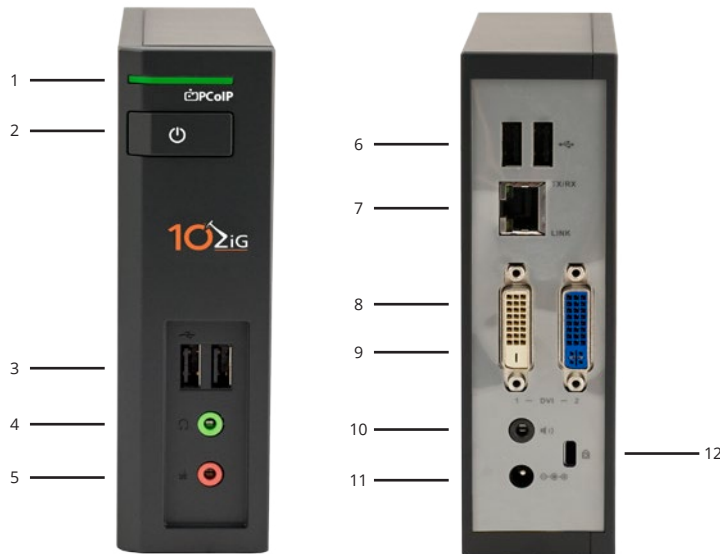

SPECIFICATIONS

1. Power On Indicator Light
2. Power Button
3. Front USB Ports (2)
4. Front Line Out
5. Mic In
6. Rear USB Ports (2)
7. Ethernet - RJ45 LAN
8. DVI-D Port 1
9. DVI-I Port 2
10. Rear Line Out
11. DC Jack
12. Kensington Lock

System Specifications

Management Utility	Teradici Management
Form Factor	Slim Line
Processor	Teradici PCoIP™ Portal Processor - TERA2
Chipset	TERA2321 PCoIP™

Dimensions

Device	5.91"(H) x 5.12"(L) x 1.77"(W) - 150mm x 130mm x 45mm
Weight	1.54 lbs (.70kg)

Connections

Ports	USB 2.0 x 4, DVI-I x 1 + DVI-D x 1 Mic-In x 1, Line-Out x 2, RJ-45 LAN, DC Jack x 1
Video Resolution	1 Screen = (2560 x 1600) - 2 Screens = (1920 x 1200)

Networking

Ethernet	10/100/1000 Base-T
Fiber	Optional SFP Fiber Connector (100/1000Mbps)

Environmental

Operating Temp.	32-104F (0-40C), 10-90% non-condensing humidity
Power	7 Watts, DC-12V/3A External Power Adapter

Certifications

CE, FCC, CAN ICES-3/NMB-3, VCCI, UL, TUV-GS, C-Tick, GOST, BSMI, RoHS

WARRANTY: 3-Year Advance Exchange Warranty

vmware

teradici
PCoIP

CITRIX

HDX

Microsoft

amazon
web services™

Americas
EMEA
APAC

P: (866) 865-5250
P: +44 (0) 116 214 8650
P: 1300 768 799

E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au

W: www.10ZiG.com
LN: 20170331

10ZiG