


Overview

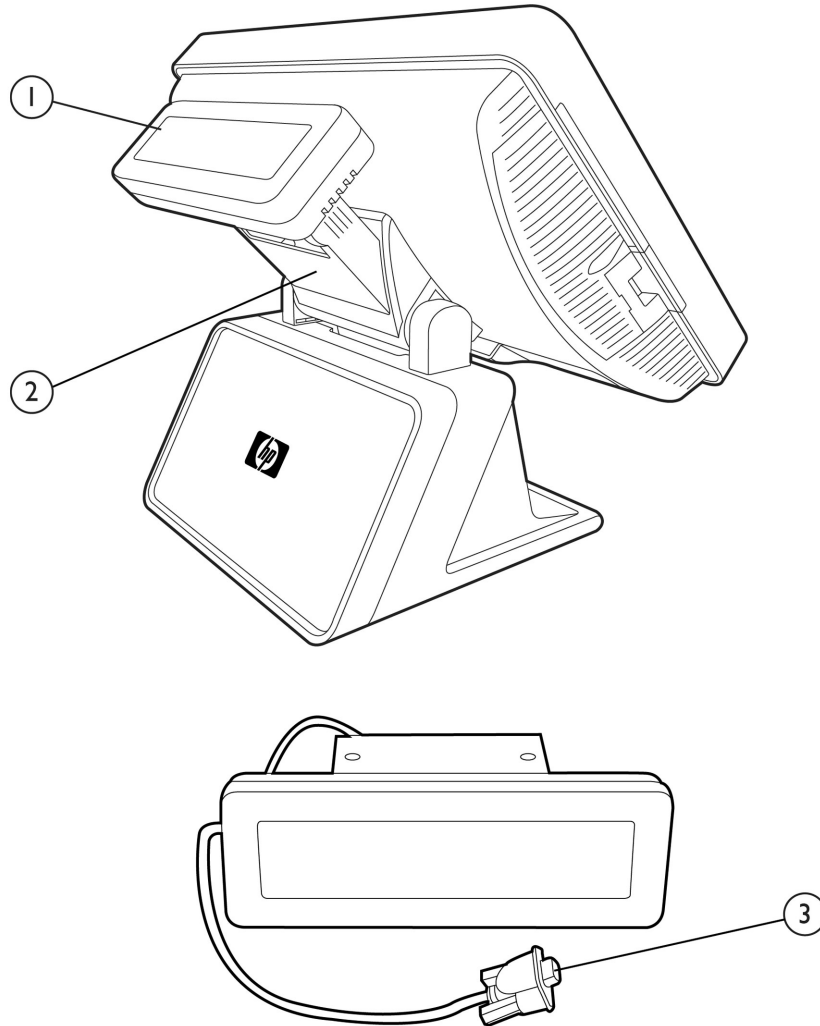

1. 2- line by 20 characters, Customer Facing Vacuum Florescent Display (VFD) (can only be used with HP ap5000 All-in-One POS System)
2. Mounting brackets (included)
3. Serial cable attaches to COM port

Introduction

This optional 2 line Customer Facing Display Kit for the HP ap5000 All-in-One Point of Sale System includes a mounting bracket and cable to integrate with the HP ap5000.

Overview

Key Features

- a. 2 line x20 character display (40 characters total), RS-232 interface, 5 Volts(V)
- b. Supports complex character set, control commands, user-defined fonts and international fonts.
- c. Display pitch adjustment 80 degrees (10 degrees to 90 degrees)

NOTE 1: VFD must be connected to the COM 1 or COM 2 port (It should not be connected to COM3 port since COM 3 does not support DC5V. Connecting the VFD into COM 3 port may damage the VFD COM 1 may be used for the VFD but 5V will need to be selected in BIOS Setup for COM 1.

NOTE 2: The VFD occupies COM 2 port from the HP factory. Although three COM ports are present on the HP ap5000, COM 2 port is occupied by the VFD when attached by the HP factory,; therefore, only two COM ports are available to the end user when the VFD is installed.



Technical Specifications

Specifications	Power supply:	DC 5V
	Interface:	Serial Interface (RS-232, bi-directional, asynchronous)
	Functions:	<ul style="list-style-type: none">• Character display• Control commands• FROM User Fonts, FROM User Table• International fonts
	Built-in Fonts:	1-byte character: International font
		2-byte character: Japanese
		Korean
		Simplified Chinese
		Traditional Chinese
	Optical Specifications:	Luminance: Minimum 350 cd/m ² , typically 1000 cd/m ²
		Color of illumination: Green (Blue Green)
	Number of characters:	40 (20- characters x 2 lines)
	Character format:	15 x 16 dot matrix
	Display area: (W x H)	6.26 x 0.929 in (159.0 x 23.59 mm)
	Character size: (W x H)	0.257 x 0.414 in (6.53 x 10.52 mm)
	Character pitch: (W x H)	0.316 x 0.515 in (8.03 x 13.07 mm)
Dot size: (W x H)	0.0118 x 0.0205 in (0.30 x 0.52 mm)	
Dot pitch: (W x H)	0.0177 x 0.0264 in (0.45 x 0.67 mm)	
Display pitch adjustment:	80 degrees (10 degrees to 90 degrees)	
Dimension (VFD only)		
Weight (VFD only)		

Interface Specification	Communication type:	Asynchronous serial
	Signal level:	RS-232 standard
	Baud rate:	9600,19200,38400,115200 bps
	Bit format:	Start(1bit) + Data(8bit) + Stop(1bit / 2bit)
	Handshaking:	DTR, DSR
	Buffer capacity:	Receive buffer: 128 bytes
		Transmit buffer: 64 bytes

Environmental Specifications	Operating temperature:	-40 to +185 °F (-40 to +85 °C)
	Storage temperature:	-40 to +185 °F (-40 to +85 °C)
	Operating humidity:	20 to 80% R.H (non-condensing)
	Storage humidity:	20 to 80% R.H (non-condensing)

Service and Support Your HP Peripheral Limited Warranty is a three (3) year (HP Option Limited Warranty Period) parts replacement warranty.



Technical Specifications

Copyright © 2010 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

