



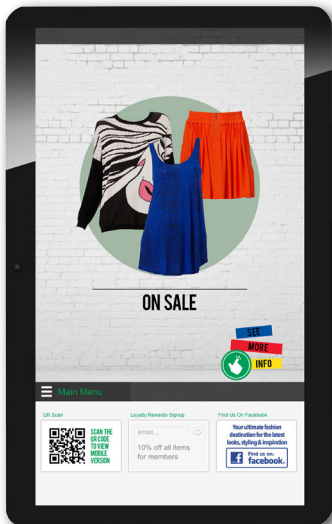

# AOPEN

Bright Ideas Connected

# eTILE

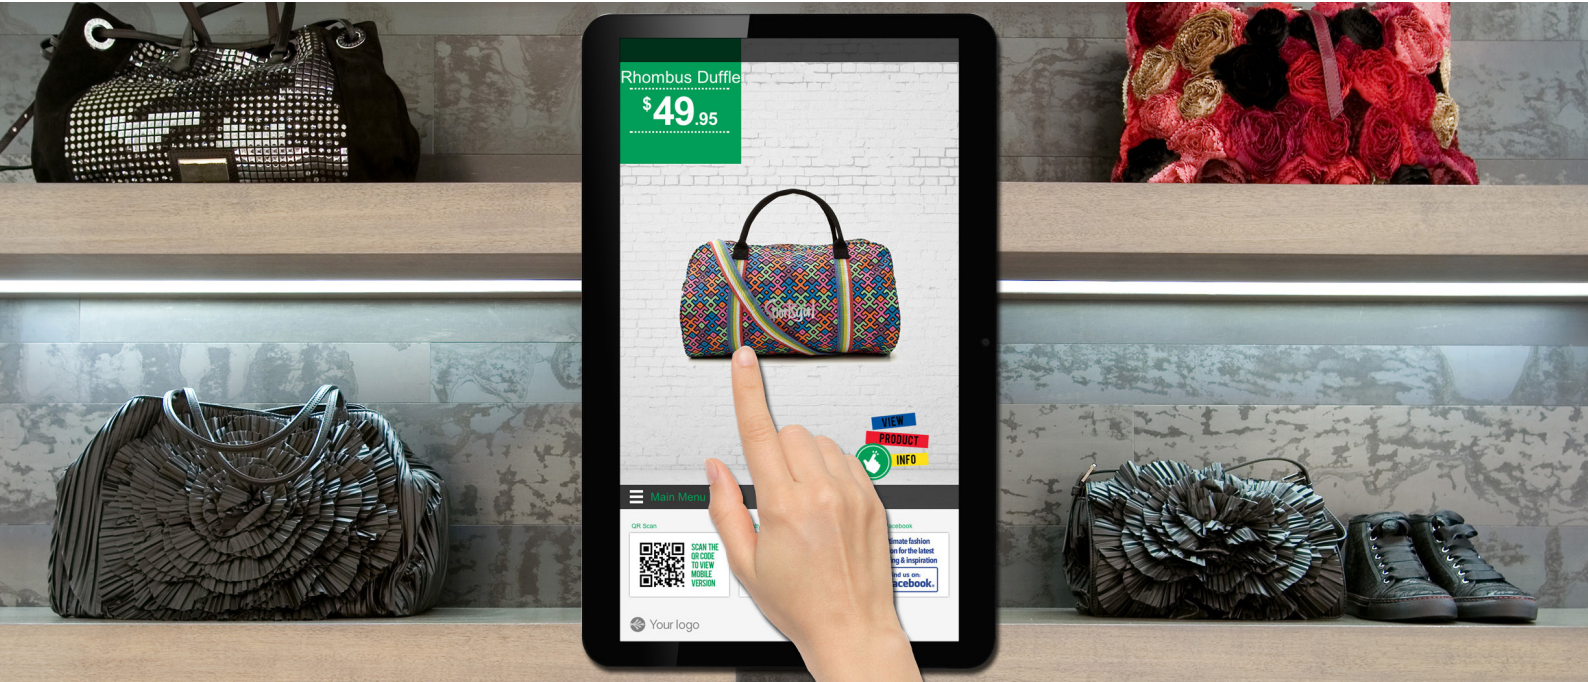

## All-in-one Interactive Touch Solution **eTILE 22**

The eTILE 22 is an ultra-thin interactive all-in-one touch display. Based on 3rd Generation Intel® Core™ technology, this powerful dynamic PC tile will enhance the interactive experience. Furthermore it incorporates a high quality 16:9 Full HD 21,5" LCD screen and secure cable and port cover to minimize user tampering. Purposely built for 24/7 use in your interior design.

A tamper proof commercial Full HD solution:

- + Ultra slim form factor (33 mm)
- + Wide viewing angle VA panel
- + Low operating and installation costs
- + Robust PCT panel: dust and water proof (IP65)
- + Viewable in bright light conditions (up to 700 nits)

# eTILE 22



33 mm



Model name		WT22M-FI
<b>Feature</b>		An ultra-thin, tamper proof interactive all-in-one touch display
<b>Dimension</b>	W x H x D (mm)	526x333x33 mm
	W x H x D (inch)	20,70x13,11x1,29 inch
<b>Weight (Kg/Poartund)</b>		6 kg / 13.2 lbs (N.W.)
<b>CPU</b>	Socket	Socket 988
	Type	Supports Intel® 2nd and 3rd generation Intel® Core™ i3, i5, i7 mobile processor TDP≤35 W
<b>Chipset</b>		Intel® QM77
<b>Memory</b>	Channels	Dual Channel
	Type	DDRIII SO-DIMM x 2
	DDR	1333/1600Mbps
	Max Memory	8G
<b>Graphics</b>	Chip	Integrated in Intel® CPU (GMA HD Graphics series) *GPU depends on CPU
<b>Audio</b>	Type	Realtek ALC886
	Channels	2 channels
<b>Expansion</b>	Mini Card Slot	Full size x1(support mSATA), Half size x1
<b>LAN</b>	Single Intel Gigabit Ethernet	
	10/100/1000 Mbps	
	Built-in 2.4G WiFi antenna (optional WiFi Card b/g/n)	
<b>Mass Storage</b>		2.5" SATA III HDD x1 (optional 2.5" SATA SSD x1)
<b>Touch Panel</b>		PCT Multi Touch Surface (10 point touch) Pencil Hardness = 7H per ASTM D3363 Pen Hitting: more than 20,000,000 times (loading 180g)
<b>Speakers</b>		Built-in 2W Stereo Speaker

<b>Microphone</b>		Built-in internal Mono MIC
<b>Webcam</b>		Built-in 1.3 M
<b>LCD</b>	<b>Resolution</b>	21,5" (1920 x 1080)
	<b>Brightness</b>	250 nits (up to 700 nits on request)
<b>Side Panel I/O</b>	<b>Line-Out</b>	x 1
	<b>Mic-In</b>	x 1
	<b>HDMI Out Port</b>	x 1
	<b>USB 2.0 Port</b>	x 6
	<b>USB 3.0 Port</b>	x 2
	<b>RS232 Port (Monitor)</b>	x 2
	<b>RJ45 LAN Jack</b>	x 1
<b>Power</b>		DC19.5V
<b>Adapter</b>		120W (19.5V, 6.3A) AC Adapter
<b>Watchdog Timer</b>		1 sec~255 sec
<b>IP Grade</b>		Front panel IP65 dust- & waterproof
<b>Security</b>		Hidden Keypad Secure cable and port cover Concealed on/off controls
<b>Accessories*</b>		Wall Mount Kit 120W Power Adapter Power Cord Utilities & Drivers CD
<b>Environment</b>		
<b>Operating Temperature</b>		0 ~ 40°C (23 ~ 104°F)
<b>MTBF</b>		50,000 hours
<b>Storage Conditions</b>		20 ~ 60°C 90% RH (40°C non condensing)

\*Accessories available on demand

Supports:



## AOPEN

Bright Ideas Connected

The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.