


Key Features

Two Monitors in a Single Package | SuperClear IPS Panel Technology | Seamless Viewing Experience | Versatile Connectivity | Full HD 1080p Resolution




Product Description

If you're looking for high-performance monitors with easy deployment and mounting capabilities, look no further than the ViewSonic® VG2753_H2. Sold as a dual pack of monitors without monitor stands, the VG2753_H2 requires less packaging for a reduced environmental footprint, while still providing VESA compatible mounting for easy dual-screen installation. With future-proof connectivity and advanced ergonomics, the ViewSonic® VG2753_H2 is a productivity-boosting monitor perfect for corporate, government, and education environments. Designed with SuperClear® IPS panel technology for wide-angle viewing and incredibly vivid colors, these monitors also feature a 3-sided thin-bezel design for a seamless viewing experience in side-by-side setups. Extensive connectivity options include VGA, HDMI, DisplayPort, and Mini DisplayPort so that you can connect to a variety of HD and analog devices – today and tomorrow.

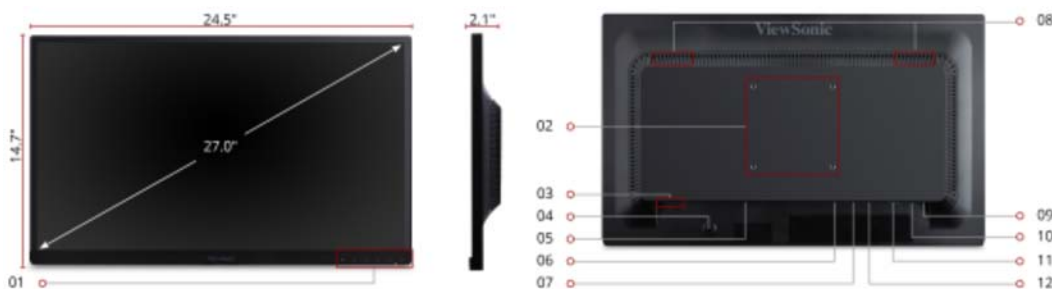

- | | |
|---|--------------------------|
| 01. Menu Control Panel | 04. Kensington Lock Slot |
| 02. VESA Compatible Wall Mount (100 x 100 mm) | 05. AC In |
| 03. USB 3.0 (Type A x2, Type B x1) | 06. Mini DisplayPort |
| | 07. Display Port |


- | | |
|-----------------------|----------|
| 08. Internal Speakers | 12. HDMI |
| 09. Audio In | |
| 10. Headphone | |
| 11. VGA | |



27"
DISPLAY



IPS
PANEL



1920 x 1080
RESOLUTION

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	27
Viewable Area (in.):	27
Type:	IPS
Resolution:	1920 x 1080
Static Contrast Ratio:	1000:1
Dynamic Contrast Ratio:	50,000,000:1
Light Source:	WLED
Brightness:	250 cd/m2
Colors:	16.7M
Color Space Support:	6-bit+A-FRC
Aspect Ratio:	16:9
Response Time (Typical GTG):	14ms
Response Time (GTG w/OD):	7ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Anti-glare, hard-coating (3H)

Compatibility:

PC Resolution (max):	1920x1080
----------------------	-----------

Connector:

USB 2.0 Type B(1), USB 3.0 Type A(2), 3.5mm Audio In(1), 3.5mm Audio Out(1), VGA(1), HDMI 1.4(1), Display Port(1), Mini Display Port(1)

Audio:

Internal Speakers:	2W (x2)
--------------------	---------

Power:

Eco Mode (Conserve):	19W
Eco Mode (optimized):	24W
Consumption (typical):	27W
Consumption (max):	45W
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	1,2, Up, Down, Power
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0-40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	15 ~ 86KHz
Frequency Vertical:	24 ~ 76Hz

Video Input:

Digital Sync:	TMD5, PCI-E
---------------	-------------

Weight (imperial):

Net (lbs):	19.09
Gross (lbs):	27.56

Weight (metric):

Net (kg):	8.66
Gross (kg):	12.5

Dimensions (imperial) (WxHxD):

Packaging (in.):	27.64 x 18.58 x 10.91
Physical (in.):	24.48 x 14.65x 2.09

Dimensions (metric) (WxHxD):

Packaging (mm):	702 x 472 x 277
Physical (mm):	621.9 x 372.2 x 53.2

General:

Regulations: cULus, FCC-B, ICES003, Energy Star 7.0, EPEAT Gold, MX-CoC, Mexico Energy

PACKAGE CONTENTS: LCD Display, Power Cable (1.8m), Mini DP to DP Cable (1.8m), USB3.0 Upstream Cable (1.8m), Quick Start Guide

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907893328

Accessories:**Awards:**