

# 22" (21.5" viewable) Full HD Monitor with SuperClear® MVA Panel Technology



Versatile Connectivity and Enhanced Viewing Comfort

**VA2252Sm**



Available for this model:  
**Privacy Filter  
Screen Protector**  
VSPF2150  
(Sold Separately)

If you're looking for a dependable work monitor at a great value, look no further than the ViewSonic® VA2252Sm. Designed with SuperClear MVA panel technology and a matte-finish uniform bezel, this 22" (21.5" viewable) monitor delivers an incredible front-of-screen experience at almost any viewing angle. And we didn't stop there, future-proof DisplayPort, as well as DVI and VGA inputs, provide productivity-boosting connectivity to PC systems, laptops, and other work devices. Our exclusive ViewMode™ feature lets you select the optimal screen setting for different applications, while Flicker-free and Blue Light filter technology minimizes eye fatigue so you can work for extended periods of time. Add dual speakers, and you have the ultimate multimedia experience.

## **Key Features:**

- Full HD 1080p resolution
- Stunning color performance & wide-angle viewing
- Flexible connectivity options
- Superior color rendering & intuitive settings
- Enhanced viewing comfort


## **Designed for:**

Business

# 22" (21.5" viewable) Full HD Monitor with SuperClear® MVA Panel Technology



**VA2252Sm**

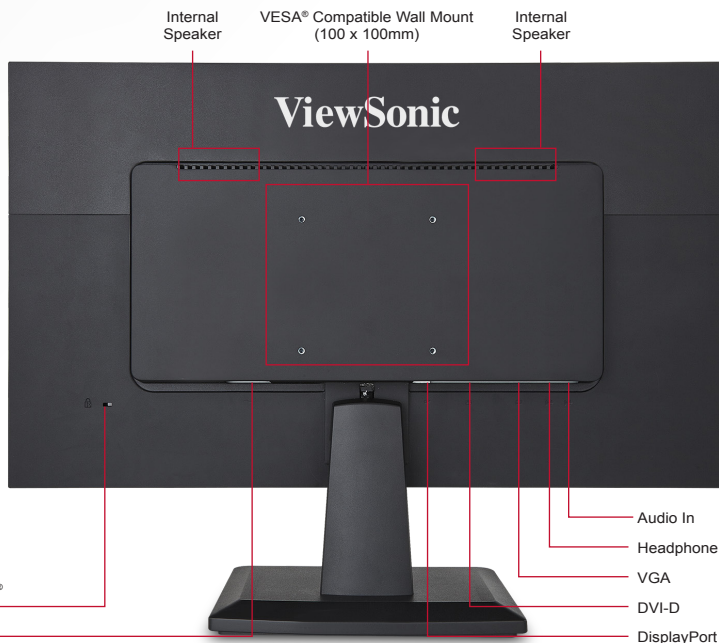

## Specifications

<b>LCD PANEL</b>	Type	Color a-Si TFT Active Matrix LCD
	Display Area	18.7" horizontal x 10.5" vertical; 21.5" diagonal
	Optimum Resolution	1920x1080
	Brightness	250 cd/m <sup>2</sup> (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (6bit + Hi-FRC)
	Response Time	6.5ms (GTG)
	Backlight	White-light LED
	Backlight Life	40,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
<b>VIDEO INPUT</b>	Digital	VGA, DVI-D, DisplayPort
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync
<b>AUDIO OUTPUT</b>	Speakers	1.5-watt (x2)
<b>COMPATIBILITY</b>	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
<b>CONNECTOR</b>	Video In	VGA, DVI-D, DisplayPort
	Audio In	3.5mm mini jack
	Headphone	3.5mm mini jack
	Power	3-pin plug (CEE22)
<b>CONTROLS</b>	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

## Optional Accessories

Mini DisplayPort to DisplayPort Cable 6FT .....	CB-00010958
DVI-D to DVI-D Cable 6 Ft .....	CB-00008187
DisplayPort to DisplayPort Cable 30FT .....	CB-00010684
DisplayPort to DisplayPort Cable 6FT .....	CB-00010555
DisplayPort to DVI Adapter .....	LCD-CABLE-001
Desktop Display Wall Mount Kit .....	LCD-WMK-001

<b>ERGONOMICS</b>	Tilt	Forward 5° / Back 20°
<b>POWER</b>	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	21W (typ.) / 28W (max.)
	Optimize	17W (typ.)
	Conserve	13W (typ.)
<b>OPERATING CONDITIONS</b>	Temperature	32~104° F (0~40° C)
	Humidity	10~90% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical with Stand	20.4 x 15.7 x 7.7 in. / 517.7 x 399 x 196.8 mm
	Physical without Stand	20.4 x 12.2 x 1.9 in. / 517.7 x 309.5 x 49.5 mm
	Packaging	22.5 x 15.2 x 4.9 in. / 571 x 386 x 124 mm
<b>WEIGHT</b>	Net with Stand	7.6 lb. / 3.4 kg
	Net without Stand	6.8 lb. / 3.1 kg
	Gross	9.8 lb. / 4.4 kg
<b>WALL MOUNT</b>	VESA compatible	100 x 100mm
<b>REGULATIONS</b>		CE, CB, RoHS, Reach, WEEE, TCO 6.0, Erp, WHQL, Windows 8, Windows 7, cUL, ENERGY STAR, FCC-B, EPEAT Silver, Custom Union, UkrSEPRO, CCC, CEECP, CEL, BSMI, Green Mark, PSB, C-tick, GEMS
<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state, or federal laws
<b>WARRANTY</b>		Three-year limited warranty on parts, labor and backlight

## What's in the box?

VA2252Sm monitor, Power cable, VGA cable, Quick Start Guide

