

# Wireless Presentation Gateway for Classrooms and Boardrooms

Interactive 1080p Streaming from up to 60 Devices

**ViewSync 3**



With the ViewSonic® ViewSync® 3 wireless presentation gateway, enjoy quick and easy streaming of 1080p content with no need for wires or cables. This handy device wirelessly streams Full HD content from up to 60 devices (such as laptops, tablets, and smartphones), to any projector or display, for a fully interactive group presentation experience. To keep things organized and moving smoothly, a convenient Moderator Mode empowers a single person to preview, control, and moderate the content from all devices, and choose the information that is shared on the projector or display. For easy plug-and-play functionality, just plug the included AutoProject USB Key into any laptop for instant sharing of content. With easy streaming and convenient content control features, the ViewSync 3 is perfect for fostering collaboration in large group settings such as in seminars, lecture halls, or corporate meeting rooms.

## **Key Features:**


- Easy and instant projection with AutoProject™ Key
- Manage content from up to 60 connected devices
- Concurrent support for WiFi, Miracast, and DLNA
- Real-time annotation and screen interaction
- Dual band wireless support

## **Designed for:**

- Education
- Business

# Wireless Presentation Gateway for Classrooms and Boardrooms

**ViewSync 3**

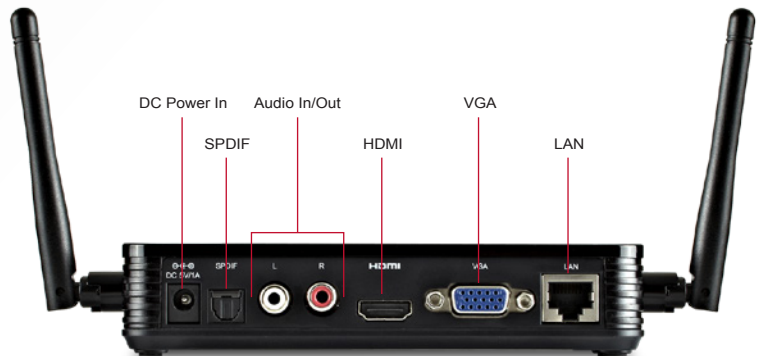

## Specifications

<b>KEY COMPONENT</b>	Wireless Module	2.4G/5G Dual-band
<b>SYSTEM REQUIREMENT</b>	WiFi Presentation Operating System Phone mirroring DLNA media streaming	i5 2.4GHz or better Windows 7/8 (32/64 bit), Mac OSX 10.7 or above Android 4.2 or better, Windows Phone 8.1 ViewMedia APP
<b>WIRELESS NETWORK</b>	Band Frequency 802.11a 802.11b 802.11g 802.11n (20MHz) 802.11n (40MHz)	2.4GHz / 5GHz Dual Band 54/48/32/24/12/9/6 Mbps 11/5.5/2/1 Mbps 54/48/36/24/12/9/6 Mbps MCSO-7, up to 72Mbps MCSO-7, up to 150Mbps
<b>WIRELESS ENCRYPTION</b>		WPA/WPA2, WPA-PSK, WPA2-PSK
<b>CONNECTOR</b>	Video Output Analog Video Output Digital Audio Out LAN Wireless USB	VGA 15-pin mini D-sub HDMI 1.3 (with HDCP) R/L RCA, SPDIF RJ45 802.11a/b/g/n 2.4GHz / 5GHz Type A (PC-less slideshows)
<b>POWER</b>	Voltage Consumption	AC 100-240V (universal), 50/60 Hz, 5V/1A output 5W (typ.)

<b>CONTROLS</b>	Buttons Remote OSD	Power (top panel), Mode (side) Web-based interface (192.168.59.254/remote) Network, Audio, Video, System (See user guide for full OSD functionality)
<b>OPERATING CONDITIONS</b>	Temperature Humidity Altitude	23–113°F (-5–45°C) 0–95% (non-condensing) 0–13,123 ft. (4,000 m)
<b>DIMENSIONS (W X H X D)</b>	Physical Packaging	7.5 x 1.3 x 4.0 in. / 191.5 x 32.3 x 102.6 mm 9.5 x 2.5 x 8.5 in. / 242.2 x 86.9 x 216.4 mm
<b>WEIGHT</b>	Net Gross	0.43 lb. / 0.2 kg 1.5 lb. / 0.7 kg
<b>REGULATIONS</b>	Safety/EMC WiFi	FCC-B, CE, ErP, RoHS FCC-ID, CE, R&TTE, NCC, EAC
<b>RECYCLE / DISPOSAL</b>		Please dispose of in accordance with local, state or federal law
<b>WARRANTY</b>		1-year limited on parts and labor

## What's in the box?

ViewSync 3 Wireless Presentation Gateway, universal power adapter, remote control with batteries, Antenna x2, AutoProject Key (USB drive) x2, Quick Start Guide, ViewSonic Wizard CD (User Guide and Client Utility Software)



ViewSonic Corporation's OMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

