


PCA-5612

Industrial VGA card with XGI Volari™ Z9s
PCA-5612

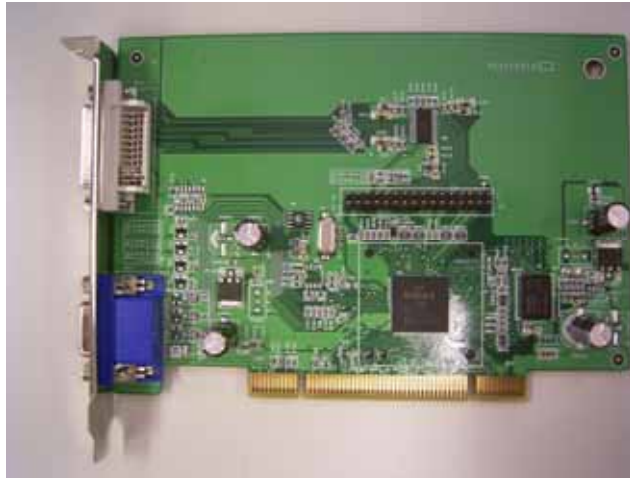

Features

- Industrial VGA Card with long life support
- 32MB DDR2 SDRAM
- Support mirror mode dual display
- Support VGA and DVI outputs
- Working under 3.3V/5V

Specifications

| | | |
|-------------------|---|--|
| Processor System | GPU (0.13 micron) Graphics Clock | XGI Volari™ Z9s 250 MHz |
| Bus | PCI | PCI 2.2 |
| Memory | Memory Clock Memory Interface Memory Size | 250MHZ 16bit 32MB DDR2 SDRAM |
| Video Output | CRT | 1600 x 1200, up to 60Hz vertical rate |
| | DVI | Single Link TMDS up to UXGA (1600x1200@60Hz). |
| Display Mode | Dual Display | CRT + DVI in windows XP/2K/Linux, supporting mirror only, NOT supporting extension mode. |
| Power Requirement | +3.3V TBD | +5V TBD |
| Environment | Temperature | Operating 0 ~ 60 °C (32 ~ 140 °F) Non-Operating -20 ~ 70 °C (-4 ~ 158 °F) |
| Physical | Dimensions | 150 x 105 mm (5.91" x 4.13") |

Ordering Information

| |
|--------------------|
| Part Number |
| PCA-5612-00A1E |

Packing List

| | |
|------------------------------|-----|
| PCA-5612 Industrial VGA card | X 1 |
| PCA-5612 Startup Manual | X 1 |
| Warranty Certificate | X 1 |
| CD with driver utility | X 1 |