

NOTES:


Electrical properties:

1. 100% open and short test.
2. Pass 4K*2K/60Hz PC test.
3. Conductor resistance: 3 OHMS.
4. Insulation resistance: 10M OHMS.
5. Hi-Pot: DC200V/0.01/S.


ROHS 2.0 and REACH compliant.




MATERIAL LIST

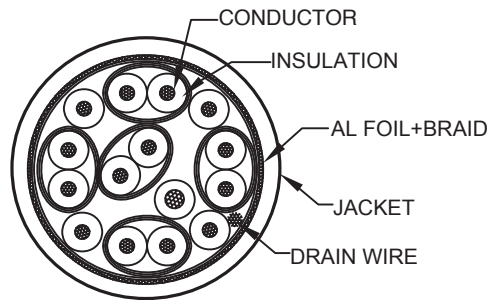

PIN OUT

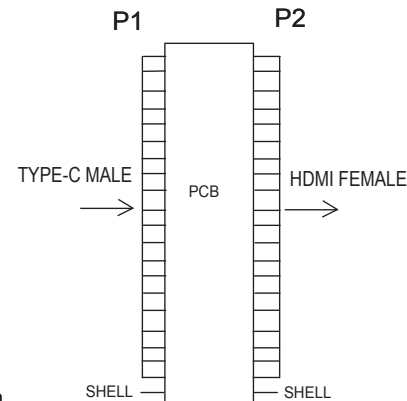

PACKAGE DRAW

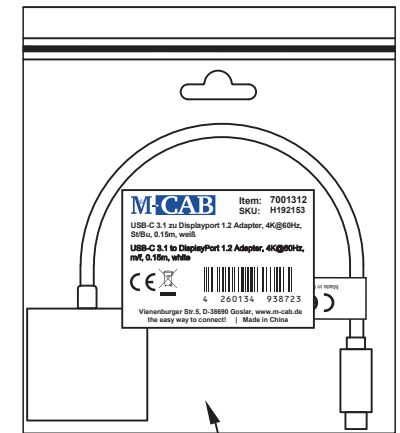

⑥	PACKAGE	PE ZIP BAG+BARCODE STICKER	1						
⑤	CABLE	(1/0.20BC*1P+AM)*5PCS+1/0.20BC*4C+7/0.16BC*1C+AM+7/0.16BC+96/0.12ALMG+PVC, OD: 5.0±0.2mm, COLOR: WHITE	0.15M						
④	OUTER MOLD	WHITE ABS	1	DRAW No.		NAME	USB3.1 TYPE-C/M TO HDMI2.0/F CABLE		
③	OUTER MOLD	WHITE PVC	1	CUSTOMER	M-CAB		MAPE	TOLERANCE	
②	CONNECTOR	HDMI FEMALE, GOLD PLATED PIN, GOLD PLATED SHELL	1	MODEL No.	7001313			X. ±1.00	X.X ±0.50
①	CONNECTOR	USB3.1 TYPE-C MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1	APPROVE BY	CHECK BY		DRAW BY	SCALE	MM
No.	PART NAME	DESCRIPTION	QTY					PAGE	1/1