### **Technical Specifications**

#### HP EliteDisplay S270n



1. LED Indicator

### **Technical Specifications**

#### HP EliteDisplay S270n



USB Type-C<sup>™</sup> port


Security cable slot

Power connector

9.

10.

11.

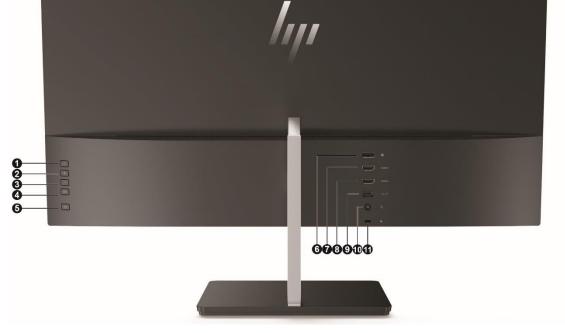

- 1. Menu button
- 2. Plus button
- Function button 2 assignable\* 3. Minus button
- Function button 3 assignable\* **4.** OK button

• OK button **8**. Function button 4 — assignable\*

\* Function buttons 2 through 4 may be used to navigate through the OSD menu based on the indicators above the buttons that are activated while the OSD menu is open.

Power button

DisplayPort<sup>™</sup> port

HDMI 1 (2.0) port

HDMI 2 (1.4) port

5.

6.

7.



Panel Specifications*	Display Size (Diagonal)	27 inch
	Display Panel Type	IPS
	Native Resolution	3840 x 2160 @ 60 Hz
	Aspect Ratio	16:9
	Brightness – Typical	350 cd/m <sup>2</sup>
	Static Contrast Ratio - Typical	1,300:1:00
	Dynamic Contrast Ratio (DCR)	5M:1 (min) /10M:1 (typical)
		o playback only, depending on series of frames or time
	duration.	
	Flicker Free	Yes
	Low Blue Light Modes	Yes
	Pixel Pitch	0.1554 x 0.1554 mm
	Pixels Per Inch (PPI)	163.18
	Backlight Lamp Life (to half brightness -	30k hours minimum
	in hours)	
	Anti-Glare Panel	Advanced Haze
	BrightView Panel	No
	Response Time – (Typical)*	5.4ms grey to grey
	Color Gamut – Typical	>99% sRGB
	Color Support	Up to 1.07 billion colors with the use of FRC technology
	Color Depth	10 Bit (8 Bit + A-FRC) 1.07 Billion color
	Horizontal Viewing Angle	178°
	(typical CR>10)	
	Vertical Viewing Angle (typical CR>10)	178°
	Panel Active Area	596.74 x 335.66 mm (23.49 x 13.21 in)
	Preset Graphic Modes/Supported	640 x 480 @ 60Hz
	Resolutions	720 x 480 @ 60 Hz
		800 x 600 @ 60 Hz
		1024 x 768 @ 60 Hz
		1280 x 720 @ 60 Hz
		1280 x 800 @ 60 Hz
		1280 x 1024 @ 60 Hz
		1440 x 900 @ 60 Hz
		1600 x 900 @ 60 Hz
		1680 x 1050 @ 60 Hz
		1920 x 1080 @ 60 Hz
		1920 x 1200 @ 60 Hz
		2560 x 1440 @ 60 Hz
		2560 x 1600 @ 60 Hz
		3840 x 2160 @ 60 Hz
	Maximum Resolution	3840 x 2160 @ 60 Hz
	Recommended Resolution	3840 x 2160 @ 60 Hz
	Vertical Scan Range	24-60 Hz
	Horizontal Scan Range	27-135 kHz
	Default Color Temperature	SRGB(D65)
	Maximum Pixel Clock Speed	533 MHz
		he typical specifications provided by HP's component
	manufacturers; actual performance may va	ry either higher or lower.
<b>Monitor Specifications</b>	Exterior Color of Monitor Bezel and	Black Head, Black Onyx Chin / Base, and Chrome plated
	Stand	Stand arm
	Plug & Play	Yes
	Tilt	-5 to + 23 degrees
	Security Lock Ready	Yes (lock is sold separately)
	Height Adjustment	Yes



	Height Adjustment Range	100 mm
	Detachable Base	Yes
	Warranty	3/3/0 : NA and EMEA
	wallancy	3/3/3 : APJ
On Comercia Disalary	On Courses Disalars Have Courturals	
On Screen Display	On Screen Display User Controls	Brightness, Contrast, Color Control, Input Control, Image
(OSD)		Control, Power Control, Menu Control, Management,
		Language, Information, Exit
	User Programmable Modes	Yes, 10
	Monitor Control Buttons or Switches	Menu,
		Plus ("+")
		Minus ("-")
		Information
		Viewing Mode
		Exit
		Next Input
		Power
	Languages	10 (English, Spanish, German, French, Italian, Netherlands,
		Portuguese, Japanese, T-Chinese and S-Chinese)
	VESA Mounting	Yes
Input Connector Types	VGA	No
	DVI-D	No
	НДМІ	1 x HDMI 2.0
		1 x HDMI 1.4
	MHL/HDMI	No
	HDCP support	1 x HDMI 2.0 HDCP 2.2 up to 4k
		1 x HDMI 1.4 HDCP 1.4
		HDCP support (HDMI and DP)
	Audio	No
	USB	1 x USB Type-C™
	Card Reader	No
	DisplayPort™ 1.2	1 x DisplayPort™ 1.2
	Video/audio cables included with	HDMI 1.8m
	lengths	DP 1.8 m
	5	USB Type-C™ 1.8m
	NOTE: USB Type-C™ supports DisplayPort	
Power & Operating	Power Supply	External
Specs	Power Source	100 - 240 VAC 50/60 Hz
Speed	Power Consumption - Maximum	126w
	Energy Saving/Standby Mode	0.5w
	Power Consumption - Typical	
		55w
	Power cable length	1.9 m
ENERGY STAR® Data	Operational Mode at 100 VAC	109.6 KWH/year
	Operational Mode at 115 VAC	109.6 KWH/year
	Operational Mode at 230 VAC	109.6 KWH/year
	• • • • • • • • • • • • • • • • • • •	
EU Energy Efficiency	On-mode Power Consumption (EC	44W
Class (EC1062)	1062/2010)	
	Annual Power Consumption (EC	64 kWh
	1062/2010)	
	Energy Efficiency Class (EC 1062/2010)	C
	Visible Screen Size	27" / 68,47 cm
<b>Operating Conditions</b>	Operating Temperature	5° - 35°C
-per anning containing	-L using rember armie	



	Operating Temperature Non-operating Non-operating Temperature Operating Humidity Non-operating Humidity Operating Altitude Non-operating Altitude	41° - 95°F -20° - 60°C 29° - 140°F 20% - 80% (non-condensing) 5% - 95% 0 - 5,000 m (16,400 ft.) 0 - 12.192 m (40,000 ft.)
Environmental Features and	Mercury-free LED display backlights Arsenic-Free Display Glass	Yes, Mercury-free LED backlighting Yes
Certifications	Low Halogen	Yes GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)
		s, cables and peripherals are not Low Halogen. Service parts
	obtained after purchase may not be Low Ha Agency Approvals and Certifications	WW application
		CE/CB/MSIP/Mexico COC/ICES/ISO 9241-307/ CU/cTUVus/ISC/CCC/CEL/Energy Star/VCCI/FCC/BSMI/WEEE /RCM/ErP
	Microsoft WHQL Certification	Win 10, Win 8, Win 7
	ENERGY STAR <sup>®</sup> Certified EPEAT <sup>®</sup> 2019 Registered	Yes, ENERGY STAR <sup>®</sup> 7 Yes
		ording to IEEE 1680.1-2018 EPEAT <sup>®</sup> . Status varies by
	country. Visit http://www.epeat.net for mo	5
	China Energy Label	CEL Grade 1
	SmartWay Transport Partnership - NA only	Yes (NA SKU)
<b>Contains Recycled</b>	Contains Recycled Plastics in Back Cover	85%
Plastics	Contains Recycled Plastics in Base/Stand	85%
	Contains Recycled Plastics in Other Parts	85% (Deco, Middle Frame)
	Recyclable Plastics	All
	Recyclable Packaging (Box, packing materials)	All
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand)	
Specifications	Metric (W x D x H)	61.35 x 18.99 x 49.85 cm
	Imperial ( $W \times D \times H$ )	24.2 x 7.5 x 19.6 in
	Display Head Dimensions (Unpacked	
	without stand)	
	Metric (W x D x H)	61.35 x 4.0 x 36.25 cm
	Imperial (W x D x H) Base Dimensions (Unpacked)	24.2 x 1.6 x 14.3 in 22.0 x 18.9 cm
	base Dimensions (Onpacked)	8.7 x 7.4 in
	Product Dimensions (Packed)	
	Metric (w x d x h cm )	71.5 x 27 x 48cm
	Imperial (w x d x h in)	28.15 x 10.63 x 18.9 in
	Product Weight (Packed)	
	Metric	10.95 kgs
	Imperial	24.16 lbs
	Product Weight (Head Only)	
	Metric	4.85 kgs



## HP EliteDisplay S270n

	Imperial <b>Product Weight</b>		10.69 lbs	
	<b>(Head and stand Unpacke</b> Metric Imperial	d)	6.14 kgs 13.53 lbs	
Environmental Data	Eco-Label Certifications & declarations	<ul> <li>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</li> <li>IT ECO declaration</li> <li>US ENERGY STAR<sup>®</sup></li> <li>TCO or TCO Certified Edge</li> <li>Based on US EPEAT<sup>®</sup> registration according to IEEE 1680.1-2018 EPEAT<sup>®</sup>. Status varies by country. Visit www.epeat.net for more information.</li> <li>US Federal Energy Management Program (FEMP)</li> </ul>		
	Energy Consumption (in accordance with US ENERGY STAR® test method) Normal Operation Sleep Off	<b>115VAC, 60</b> 31.14 W 0.25 W 0.21 W		<b>100VAC, 50Hz</b> 31.12 W 0.31 W 0.23 W
	<b>Heat Dissipation*</b> Normal Operation Sleep Off		hr 108 BTU/hr r 1 BTU/hr	<b>100VAC, 50Hz</b> 106 BTU/hr 1 BTU/hr 1 BTU/hr easured watts,
	Additional Information	<ul> <li>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.</li> <li>This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.</li> <li>This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li> <li>This product is in compliance with the IEEE 1680.1 (EPEAT) standard, see http://www.epeat.net</li> <li>Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>This product contains 15.8% post-consumer recycled plastic (by wt.)</li> <li>This product is 98.8% recycle-able when properly disposed of at end of life.</li> </ul>		
	Packaging Materials	External:	PAPER/Corrugated PAPER/Paperboard	1860 g 20 g
			PAPER/Paper	28 g
		Internal:	COMPOSITE/paper/carton+plastic	3 g
			PLASTIC/Polyethylene high density - H	IDPE 28 g



ions		
	PLASTIC/Other	1 g
	PLASTIC/Polyethylene Expanded - EPE	823 g
RoHS Compliance	HP, Inc. is committed to compliance with all applicable en and regulations, including the European Union Restriction Substances (RoHS) Directive. HP's goal is to exceed comp by meeting the requirements of the RoHS Directive on a w July 1, 2006, RoHS substances will be virtually eliminated levels below legal limits) for all HP electronic products su Directive, except where it is widely recognized that there feasible alternative (as indicated by an exemption under t Directive).	n of Hazardous liance obligations vorldwide basis. By I (virtually = to bject to the RoHS is no technically
Material Usage	This product does not contain any of the following substa regulatory limits (refer to the HP General Specification for Environment at http://www.hp.com/hpinfo/globalcitizenship/environment	r the
	<ul> <li>Asbestos</li> <li>Certain Azo Colorants</li> <li>Certain Brominated Flame Retardants – may not retardants in plastics</li> <li>Cadmium</li> <li>Chlorinated Hydrocarbons</li> <li>Chlorinated Paraffins</li> <li>Formaldehyde</li> <li>Halogenated Diphenyl Methanes</li> <li>Lead carbonates and sulfates</li> <li>Lead and Lead compounds</li> <li>Mercuric Oxide Batteries</li> <li>Nickel – finishes must not be used on the externa to be frequently handled or carried by the user.</li> <li>Ozone Depleting Substances</li> <li>Polybrominated Biphenyl Ethers (PBBEs)</li> <li>Polybrominated Biphenyl Oxides (PBBOs)</li> <li>Polybrominated Biphenyl (PCB)</li> <li>Polychlorinated Terphenyls (PCT)</li> <li>Polyvinyl Chloride (PVC) – except for wires and carried packaging has been voluntarily removed frequentipackaging has been voluntarily remove</li></ul>	al surface designed ables, and certain

- applications.Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Technical Specifica	tions	
	Packaging	<ul> <li>HP follows these guidelines to decrease the environmental impact of product packaging: <ul> <li>Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>Design packaging materials for ease of disassembly.</li> <li>Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul> </li> </ul>
	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.
	HP, Inc. Corporate Environmental	For more information about HP's commitment to the environment:
	Information	Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications <u>http://www.hp.com/hpinfo/globalcitizenship/environment/product</u> <u>design/ecolabels.html</u> ISO 14001 certificates: http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c0 4755842 and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cer t.pdf
Pallet Information	Pallet Dimensions (L x V	<b>V x H mm)</b> 1098L*725W*125H(mm)

Pallet Information	Pallet Dimensions (L x W x H mm)	1098L*725W*125H(mm)
	Pallet Dimensions (L x W x H inch)	43.23L*28.54W*4.92H(inch)
	Pallet Total Weight (including units) kg	190kg
	Pallet Total Weight (including units) lbs	418.52 lbs
	Pallet Layers	4 layers
	Pallet Product per Layer	4 units
Options <sup>1</sup>	USB-C Universal Dock	1MK33AA
	HP Hot Desk Stand	W3Z73AA
	Single Monitor Arm	BT861AA

## HP EliteDisplay S270n

	Dual Head Cable Lock Mini and Thin Client IWC UHD USB Graphics Adapter	T1A64AA G1V61AA N2U81AA
Software Included	Software included	Display Assistant
Accessories Included	What's in the box?	AC power cord (1.9m) 6.2 ft HDMI cable (1.8m) 5.9 ft USB Type-C™ cable (1.8m) DP cable (1.8m) VESA Mount Adapter
Other	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.



### Technical Specifications

Copyright © 2019 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

DisplayPort<sup>™</sup> and the DisplayPort<sup>™</sup> logo are trademarks owned by the Video Electronics Standards Association (VESA<sup>®</sup>) in the United States and other countries.

USB Type-C<sup>™</sup> and USB-C<sup>™</sup> are trademarks of USB Implementers Forum.

ENERGY STAR<sup>®</sup> is a registered trademark owned by the U.S. Environmental Protection Agency.



Change Log	
V1to V2	Accessories section updated
V2 to V3	Response time updated
V3 to V4	Environmental data table added
V4 to V5	Specs updated
V5 to V6	Response time update
V6 to V7	Unpacked weight head and stand
V7 to v8	Updated EPEAT

