




# OL3000RTXL2UN SMART APP ONLINE UPS

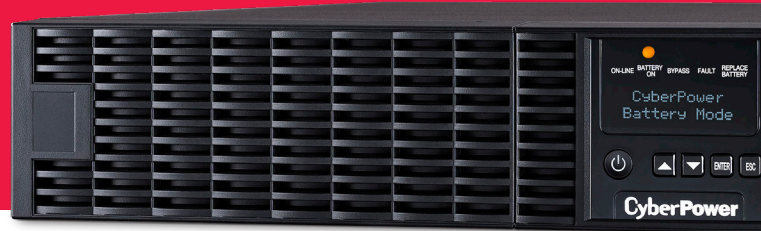

Prevent business interruptions and safeguard mission-critical enterprise network equipment.

The CyberPower OL3000RTXL2UN is a rack/tower UPS with double conversion topology. It provides sine wave output to critical applications and equipment that require seamless power correction. The Extended Battery Module (EBM) expands runtime, and Fast Charge Technology restores full backup power faster. This model comes with an extendable LCD control panel, Smart Battery Management charging technology, and energy-saving GreenPower UPS™ ECO Mode.

The OL3000RTXL2UN offers generator compatibility and delivers clean AC power with zero transfer time. A factory installed RM card allows remote management and configuration of the UPS via a standard web browser, command line interface (CLI), or network management system (NMS). Its sine wave output keeps sensitive equipment working by preventing unnecessary shutdowns that can occur with simulated sine wave output.

With a \$400,000 lifetime connected equipment guarantee and a three-year warranty, you can trust CyberPower's commitment to high quality

## TYPICAL APPLICATIONS

- Corporate and Enterprise Servers
- Network and Storage Devices
- Edge Closets
- PBX and VoIP Installations

## FEATURES

- 3000VA / 2700W
- Double Conversion Topology
- Sine wave output, zero transfer time
- Configurable Output - 100, 110, 115, 120, 125 V, 50/60 Hz
- GreenPower UPS™ ECO Mode
- RM205CARD for remote monitoring
- 2U Rack Mount/Tower Convertible
- Outlets: (6) NEMA 5-20R, (1) NEMA L5-30R
- PowerPanel® Business Edition Management Software

## SPECIFICATIONS

### GENERAL

UPS Topology	Double Conversion
Energy Saving	Yes, ECO Mode Efficiency >95%

### INPUT

Input Voltage Range	60 V to 69 V, 0% to 60% load 70 V to 79 V, 0% to 70% load 80 V to 89 V, 0% to 80% load 90 V to 95 V, 0% to 90% load 96 V to 150 V, 0% to 100% load
Frequency Range	40 - 70 Hz (auto sensing)
Input Power Factor	0.99
Cold Start	Yes
Plug Type	NEMA 5-15P
Cord Length (ft)	10
Cord Length (m)	3

### OUTPUT

VA	3,000 VA at 120, 125 V 2,700 VA at 115, 110 V 2,400 VA at 100 V
Watts	2,700 W at 120, 125 V 2,430 W at 115, 110 V 2,160 W at 100 V
Rated Power Factor	0.9
On Battery Waveform	Sine wave
On Battery Voltage	100, 110, 115, 120, 125 V ±2% (configurable)
On Battery Frequency	50/60 Hz ± 0.25 Hz (auto-sensing or configurable)
Harmonic Distortion	THD < 3% at Linear Load, < 5% at Non-linear Load
Crest Factor	3:1
Outlets - Total	7
Outlet Type	NEMA 5-20R (6), NEMA L5-30R (1)

# OL3000RTXL2UN SMART APP ONLINE UPS



## SPECIFICATIONS CONT.

### OUTPUT (cont.)

Overload Protection	Line Mode: 105% to 125% load for 1 min 126% to 150% load for 10 sec  Battery Mode: 105% to 130% load for 10 sec 131% to 150% load for 2 sec
Bypass	Internal Bypass (Automatic and Manual)
Transfer Time	0ms

### BATTERY

Runtime at Half Load	11 minutes
Runtime at Full Load	3.5 minutes
Battery Type	Sealed Lead-Acid
Battery Size	12V/9Ah
Battery Quantity	6
Replacement Battery Cartridge	RB1290X6A
Replacement Battery Cartridge Quantity	1
Hot Swappable	Yes
Typical Recharge Time	4 h (0% to 90%)
Smart Battery Management (SBM) Mode	Yes
Extended Battery Option	BP72V60ART2U

### SURGE PROTECTION & FILTERING

Surge Protection	1335 Joules, per IEC 61000-4-5 Level 3
Phone RJ11 / Ethernet RJ45	1-In / 1-Out (combo)
EMI/RFI Filtration	Yes

### MANAGEMENT & COMMUNICATIONS

LCD Control Panel	Supports: Multi-Language Interface, 25 Types of Function Setting, 24 Types of Read Out and 5 Event Logs.
Rotatable LCD Control Panel Option	Yes
Removable LCD Control Panel Option	Yes - Requires a separate DB26 Cable
HID Compliant USB Port	Yes
Serial Port	Yes
EPO Port	Yes
Dry Contacts	Yes
Cables Included	USB cable, Serial cable, Phone cable
LED Indicators	Power On (white) Line Mode (green) Battery Mode (yellow) Bypass Mode (yellow) Fault (red) Replace Battery (red)
Audible Alarms	Battery Mode Battery Low Overload UPS Fault
Software	PowerPanel® Business Edition
Upgradeable Firmware	Yes
Expansion Slot	RMCARD205 pre-installed

### PHYSICAL

Form Factor	Rack/Tower
Color	Black
Enclosure Construction	Steel
Mounting Hardware	Included
Dimensions (WxHxD) (in.)	17 x 3.5 x 23.62 (in)
Dimensions (WxHxD) (mm.)	432 x 89 x 600 (mm)
Weight (lbs)	68.2
Weight (kg)	30.93
Rack Size	2U

### SHIPPING DIMENSIONS

Dimensions (WxHxD) (in.)	9.25 x 34.5 x 22.25 (in)
Dimensions (WxHxD) (mm.)	234.95 x 876.3 x 565.15 (mm)
Weight (lbs)	85.5
Weight (kg)	38.78

# OL3000RTXL2UN SMART APP ONLINE UPS



## SPECIFICATIONS CONT.

### ENVIRONMENTAL

Operating Temperature	32 - 104 °F (0 - 40 °C)
Operating Relative Humidity	0 - 90% (non-condensing)
Operating Elevation	0 - 10,000 ft (0 - 3,000 m)
Storage Temperature	-4°F to 113 °F (-20°C to 45 °C)
Storage Relative Humidity	0 - 95% (non-condensing)
Storage Elevation	0 - 50,000 ft (0 - 15,000 m)
UPS Online Thermal Dissipation	889 BTU/hr
ECO Mode Thermal Dissipation (100% Load)	364 BTU/h
Audible noise at 1m from surface of unit	38 to 55 dBA (0 to 100% load)

### CERTIFICATIONS

Safety	UL 1778 5th Ed. CSA C22.2 NO.107.3-05 FCC Part 15 Class A
Environmental	ROHS Compliant

### WARRANTY

Product Warranty	3 Years Limited
Extended 2-Year Warranty	WEXT5YR-U4B
Connected Equipment Guarantee	Lifetime
CEG Amount	\$400,000