


Key Features

Resistive Touch Technology | MEGA Dynamic Contrast Ratio |
Control Multiple Devices | Ergonomic Design



Product **Description**

The TD1711 is a 17" Full HD monitor with resistive touch technology. With a robust, pressure-sensing touchscreen that is resistant to screen contamination, the TD1711 is ideal for use in retail, POS, and commercial environments. Resistive touch technology on the TD1711 is also fully functional in gloved environments and compatible with styluses. Featuring stunning Full HD resolution and 20M:1 MEGA Dynamic Contrast Ratio, the TD1711 delivers extremely sharp and crisp images. Flexible connectivity options include VGA, HDMI with CEC, RS232, and USB ports. A VESA-mountable design offers additional convenience for use as a wall-mounted display. Industry-leading warranty protection and ViewSonic product quality makes this durable touch display a great long-term investment for a variety of environments.

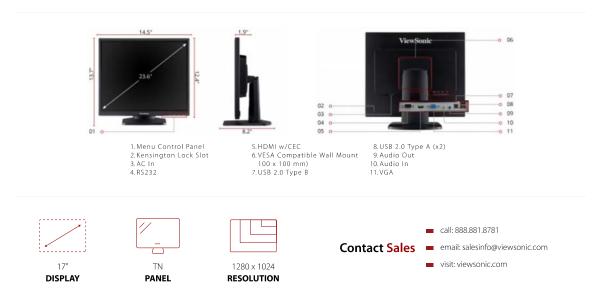

1 of 2

Display:	
Display Size (in.):	17
Viewable Area (in.):	17
Panel Type:	TN
Resolution:	1280 x 1024
Static Contrast Ratio:	1,000:1
Dynamic Contrast Ratio:	20,000,000:1
Light Source:	WLED
Brightness:	250 cd/m2
Colors:	16.7M
Color Space Support:	6 bits + Hi FRC
Aspect Ratio:	5:4
Response Time (Typical GTG):	5ms
Viewing Angles:	170° horizontal, 160° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Hard coating (3H), Haze 8% or below
Compatibility:	
PC Resolution (max):	1280 x 1024
Connector:	
USB 2.0 Type A(2), USB 2.0 Type B(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), VGA(1), HDMI 1.4 (with CEC)(1), RS232 In(1)	
Touch:	
Touch Technology:	Resistive
Touch Points:	1-Point Touch

Audio:

1W (x2) Internal Speakers:

Power:

Eco Mode (Conserve): 10.1W Eco Mode (optimized): 11.4W Consumption (typical): 12.6W Consumption (max): 17W

AC 100-240V (universal), 50-60Hz Voltage:

Stand-by: 0.3W Power Supply: Internal

Additional Hardware:

Kensington Lock Slot:

Controls:

Physical Controls: 1, 2, 3, 4, Power

Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for On Screen Display: complete OSD functionality)

Operating Conditions:

32-104° F (0 - 40° C) Temperature:

Humidity (non-condensing): 20-90%

Mount:

VESA Compatible: 100 x 100 mm

Video Signal:

Frequency Horizontal: 24 ~ 82KHz Frequency Vertical: 50 ~ 75Hz

Video Input:

Digital Sync: TMDS

Ergonomics:

Tilt (Forward/Back): 5º / 90º

Weight (imperial):

Net (lbs): 8.6 Net Without Stand (lbs): 6.0 11.7 Gross (lbs):

Weight (metric):

Net (kg): 3.9 Net Without Stand (kg): 2.7 Gross (kg): 5.3

Dimensions (imperial) (WxHxD):

Packaging (in.): 17.7 x 16.3 x 6.8 Physical (in.): 14.5 x 13.7 x 8.2 14.5 x 12.4 x 1.9 Physical Without Stand (in.):

Dimensions (metric) (WxHxD):

450.0 x 415.0 x 172.0 Packaging (mm): Physical (mm): 368 7 x 347 6 x 208 0 Physical Without Stand (mm): 368.7 x 314.4 x 46.9

General:

Regulations: cTUVus, FCC-B, ICES003, Energy Star 7.1, EPEAT Silver, TUV Mexico CoC,

PACKAGE CONTENTS: TD1711 Display, Power Cable, VGA Cable, USB Cable, Audio Cable,

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907979817

Accessories:

CB-00008948, CB-00009950, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001

Copyright © ViewSonic Corporation 2000-2018. All rights reserved. (08/28/2018 11:30 AM PST)

2 of 2 8/28/2018 11:31 AM