

Orchestrating a brighter world

NEC

49" LED-backlit, S-IPS, ultra-narrow bezel,
LCD displays ideal for video wall applications

NEC LCD Video Wall Displays




24/7 runtimes, advanced calibration techniques and picture perfect image quality make these displays ideal video wall solutions for retail signage, control room applications, broadcast environments and rental markets.

The Ideal Video Wall Display

Transform your video walls with the crystal clear imagery of the NEC 49" UN492S and UN492VS. On top of this, there have been many advancements in color control for each display. S-IPS panel technology provides exceptional off angle viewing, color reproduction and image quality for all types of installations. Also, direct LED backlighting not only reduces power consumption but also improves edge-to-edge brightness uniformity. Mere millimeters separate content from display to display which ensures a smooth transition across a video wall. This display is ideal for digital signage, command and control, entrance lobbies and broadcast applications, and can be deployed in video wall applications up to 10 x 10 in size utilizing integrated TileMatrix™ technology. TileMatrix technology within these displays can also now support up to UHD (3840 x 2160) resolution through the internal daisy chain functionality through both the DisplayPort and HDMI out connections to allow for ultra high definition resolution across the entire video wall. New groundbreaking SpectraView Engine technology integrated into each display allows for the most advanced color control in the market allowing for the ultimate uniformity from display to neighboring display for consistence across the entire wall.


DisplayPort and HDMI UHD Daisy Chain Functionality

These displays have the ability to input a 4K UHD signal via and then also output the same signal across the entire wall via both an HDMI and DisplayPort out connection. This allows TileMatrix to support up to 4x the native resolution of each individual display.

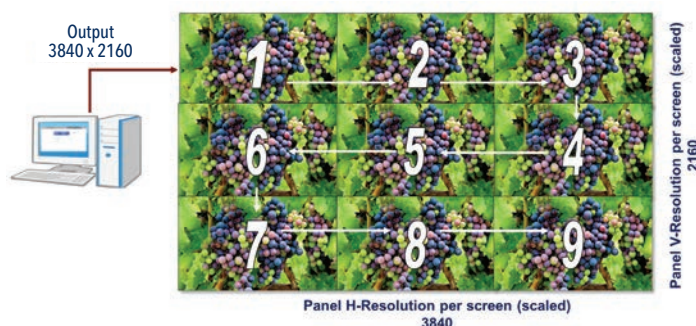

SPVA Panel and an Ultra Narrow Bezel

Brand new SPVA panel technology allows for UN492S and UN492VS minimize the bezel to a mere 1.8mm while maintaining high native contrast ratio and superb image quality compared to typical video wall displays. On top of that, each display is equipped with TileComp technology which allows the content that would be behind these bezels to be compensated for, allowing for truer and more realistic imagery.

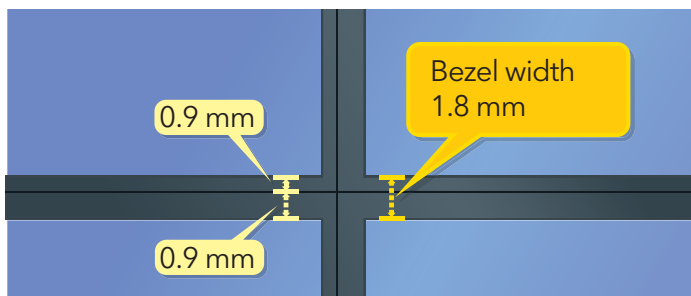


Auto TileMatrix, Auto ID and Auto IP Address Technologies

Auto TileMatrix and ID features allow a user to simply set up the size of the video wall on the first display and automatically scale the content across the remaining displays. Auto IP Address simplifies control setup by setting the static IP address on the first display then initiating the feature so that the IP Addresses of consecutive displays following the LAN daisy chain.

Advanced Heat Management


Monitoring and managing the temperature of each display is crucial to secure reliability and longevity. An industrial-strength, premium-grade panel with additional thermal protection, internal temperature sensors with self-diagnostics, and fan-based technology allows for 24/7 operation, and protects your display investment.

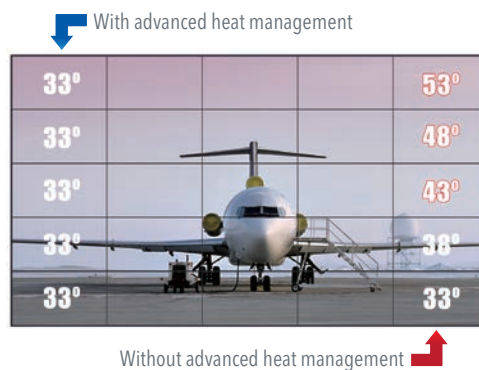

Without heat management, the displays placed higher on a wall will sustain a hotter temperature than the screens below. This damaging heat will lower the picture quality and life expectancy of the product. However, NEC's advanced heat management ensures heat dissipation for a more uniform overall wall temperature. Integrated cooling fans automatically turn on and stay on when high internal temperatures are detected. These will stay on until the heat is properly dissipated and the display remains under proper temperature thresholds.

Frame Comp Functionality

By allowing per row frame adjustment across the video wall, this feature allows for better content synchronization when content is moving across the video wall.

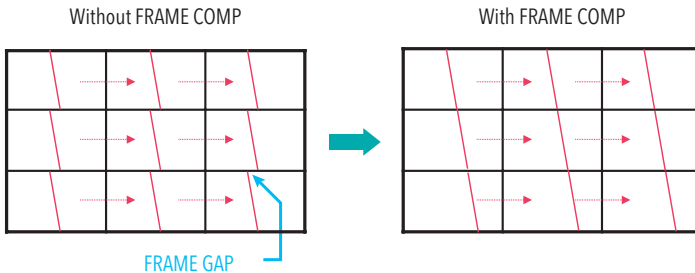

Human Sensor and Ambient Light Sensor

This new optional human (motion) sensor accessory (KT-RC3) helps to deliver creative digital signage to end users by allowing for dynamic control of brightness, audio and source inputs while saving operating costs. Auto dimming adjusts the backlight of the LCD automatically depending on the amount of ambient light. This sensor also acts as a IR sensor that can be utilized to control the entire video wall either by individually controlling each monitor through the LAN daisy chain or by controlling each display simultaneously.



Anti-Glare Panel

All of the new video wall displays come equipped with a high haze panel that scatters ambient lighting rather than reflecting it like most other displays. This allows for content to always be viewable and onlookers to have perfect screen readability in any situation. This is an ideal feature in the case of high ambient light situations such as through the windows of an airport or if there are spot or track lighting directly above the video walls in a retail application.



With Anti-Glare



Without Anti-Glare

NaViSet Administrator 2

This software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control functionality of the majority of NEC display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures.




Dedicated Color Calibration Software

As the brightness and color temperature of the LCD change with time, colors may not match across multiple screens. The NEC Display Wall Calibrator software ensures color uniformity and fidelity across multiple screens, creating a perfectly matched image in tiled environments. On top of this, the Display Wall Calibrator function works 2x faster than with previous generations of these displays. There is also a new feature to update the uniformity across a display via recalibration if necessary and to dynamically adjust the corners for slight color differences.

NEC Display Wall Calibrator

Spectraview Engine

Utilizing NEC proprietary SpectraView Engine technology, each display is calibrated at a factory level on a grid pattern for white point, gamma and color. Each display can also support a 'Self Calibration' allowing one to plug a MDSVSENSOR3 directly into the display and update the factory calibration for white point, RGB and luminance to match that of the color sensor. This allows the OSD settings to match that of the color sensor being used. After a self calibration there is also a 'White Copy' function that can be utilized when adding a new display into an existing video wall. This allows for one to simply copy the white pattern from an adjacent display into a new display with ease.

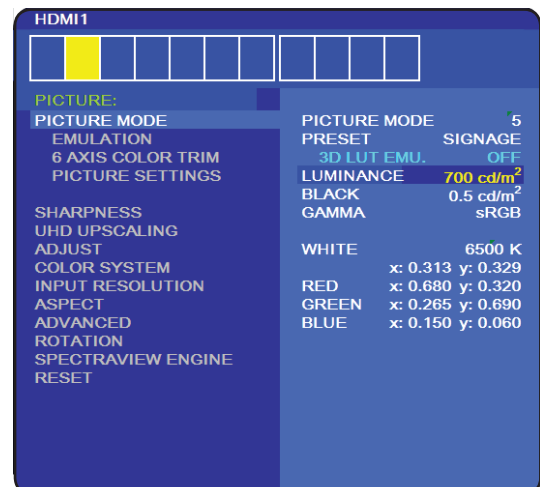

MODEL		UN492VS		UN492S			
LCD MODULE		Panel Technology		S-IPS			
		Viewable Image Size		49"			
		Native Resolution		1920 x 1080			
		Brightness (Typical/Maximum)		350 cd/m ² / 500 cd/m ²	500 cd/m ² / 700 cd/m ²		
		Contrast Ratio (Typical)		3500:1			
		Viewing Angle		178/178°			
		Aspect Ratio		16:9			
		Displayable Colors		Over 1.07 Billion			
		Orientation		Landscape/Portrait			
Panel Haze (%)		25					
CONNECTIVITY		Input Terminals		Digital		HDMI x2 (1.4/2.0), DisplayPort x2 (1.1/1.2), DVI-D	
				Analog		VGA 15-pin D-sub, RCA Composite	
				Audio		Audio Mini Jack x2, DisplayPort Audio, HDMI Audio	
				External Control		RS-232C, LAN (100Mb), 3.5mm Mini-Jack (IR Remote)	
		Output Terminals		USB		microSD (Media Player), USB 2.0 (Media Player, USB (Service)), USB Type-B (Upstream), USB x2 (Both for Compute Module, 1 x 5V/2A Powered)	
				Digital		DisplayPort (Outputs DisplayPort1 and OPTION (DP)), HDMI (Outputs HDMI1, DVI and OPTION (TMDS))	
				Audio		3.5mm Mini-Jack, External Speaker Jack x2	
		External Control		LAN (100Mb)			
POWER CONSUMPTION		Power Consumption (Typical/Max Brightness/Absolute Max)		95W/125W/275W		120W/165W/320W	
		Network Standby		2W			
		Standby		0.5W			
		Current Rating		3.2A @ 100V, 1.3A @ 240V		3.6A @ 100V, 1.5A @ 240V	
PHYSICAL SPECIFICATIONS		Bezel Width (L/R, T/B)		0.9mm/0.9mm, 0.9mm/0.9mm			
		Net Dimensions (Without stand; W x H x D)		42.4 x 23.9 x 3.9 in. / 1075.7 x 605.9 x 99.0mm			
		Net Weight (Without Stand)		45.0 lbs. / 20.4 kg			
		VESA Hole Configuration		300 x 300 (4-hole, M6)			
ENVIRONMENTAL CONDITIONS		Operating Temperature		0 - 50°C / 32 - 122°F			
		Operating Humidity		0 - 90%			
		Operating Altitude		9843 ft. / 3000m			
LIMITED WARRANTY				3 years Advanced Replacement			
ADDITIONAL FEATURES				3D LUT, AMX Support, Auto ID/Auto TileMatrix, Automated Email Alert Function, CEC Support through HDMI, Crestron Roomview Support, DICOM Simulation, Display Browser Control, Display Wall Calibrator Compatible, FrameComp Technology, High Haze Panel, Intelligent Wireless Data (NFC), Key Guide, NaViSet Administrator 2 Compatible, OSD Rotation for Portrait Orientation, OPS Compatible, PJ Link Support, Point Zoom Function, Power USB Port (5V/2A), Programmable LUT, Raspberry Pi Compute Module Compatible, Real Time Clock, SpectraView Engine Support for Advanced Calibration Techniques, SNMP Support, 24-Hour Scheduler Function, UHD Support through HDMI/DisplayPort			
SHIPS WITH				3.0m AC Power Cable, 2.0m HDMI Cable, 2.0m DisplayPort Cable, User Manual			
OPTIONAL ACCESSORIES				Overframe Bezel Kit (KT-49UN-OF), Display Wall Calibrator Kit (KT-LFD-CC2), IR/Ambient Light/Human Sensor and Remote Accessory (KT-RC3), OPS PC's (OPS-APIS-PS, OPS-PCAEQ-PS2, OPS-PCAEQ-PS), Internal HD-SDI Input Card (SB-01HC), Internal 3G/HD/SD-SDI Input Card (SB-04HC), Thin Side/Rear Mounted Speaker (SP-1F1), Optional Tabletop Stand (ST-322)			

Input Panel

1. External Speaker Terminal

2. Audio Out

3. USB1

4. USB2

5. USB CM1 (2A)

6. USB CM2

7. LAN1

8. LAN2
9. Video In

10. USB MP

11. Remote In

12. microSD

13. RS-2323C

14. HDMI1 (Daisy Chain In)

15. DVI-D

16. HDMI Out (Daisy Chain Out)

17. HDMI2 (CEC)
18. DisplayPort2


19. DisplayPort1 (Daisy Chain In)

20. DisplayPort Out (Daisy Chain Out)


21. VGA (RGB, YPbPr)

22. Audio In1

23. Audio In2

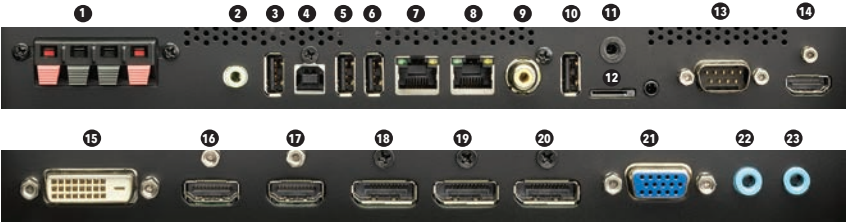

Dimensions

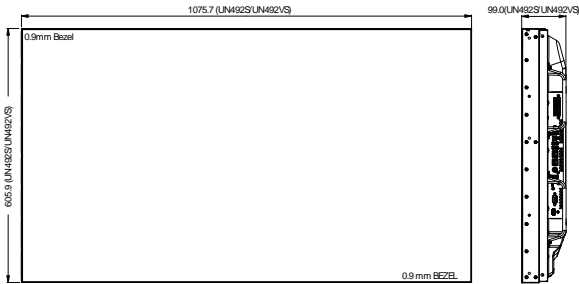

Options

OPS PC's

- OPS-APIS-PS

OPS-PCAEQ-PS2

OPS-TCIS-PS
-

- SDI

HD-SDI

3G-SDI
- SB-01HC

SB-04HC
-

- HDBaseT

SB-07BC
-

- Sensor Kit

KT-RC3
- Human (Motion) / Ambient Light / IR Remote

- Stand

ST-322
-

- Display Wall Calibrator Kit

KT-LFD-CC2
-

- Over Frame Kit

KT-49UN-OF for UN492S/UN492VS
-

MultiSync, NaViSet, TileMatrix and Frame Comp are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan, the United States and other countries.
The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.
DisplayPort and DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the United States and other countries.
HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance.
CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc.
AMX is a trademark or registered trademark of AMX in the United States and other countries.
Trademark PJLink is a trademark applied for trademark rights in Japan, the United States and other countries and areas.
VESA is a trademark of a nonprofit organization, Video Electronics Standard Association.
All other trademarks are the property of their respective owners. The images in this brochure are samples.
All specifications are subject to change without notice.

