

20" (19.5" viewable) Full HD 1080p LED Monitor

Stunning Color Performance with SuperClear® MVA Technology

VA2055Sm



If you're looking for stunning color at a great value, look no further than the ViewSonic® VA2055Sm monitor. Designed with SuperClear MVA technology, this 20" (19.5" viewable) monitor delivers incredibly brilliant color at almost any viewing angle. And we didn't stop there, our proprietary ViewMode feature lets you select the optimal screen setting for different applications, while Flicker-free and Blue Light filter technology eliminates eyestrain so you can work or play for extended periods of time. Featuring Energy Star and EPEAT certification, the energy-saving VA2055Sm offers solid performance and great long-term value. Add dual 2W speakers with DVI and VGA inputs, and you have the ultimate multimedia experience.

Key Features:

Stunning color performance
& wide-angle viewing

Full HD 1080p resolution

Superior color rendering
& intuitive settings

Enhanced viewing comfort

Lower energy consumption

Designed for:


Home

Business

Education

20" (19.5" viewable) Full HD 1080p LED Monitor

VA2055Sm

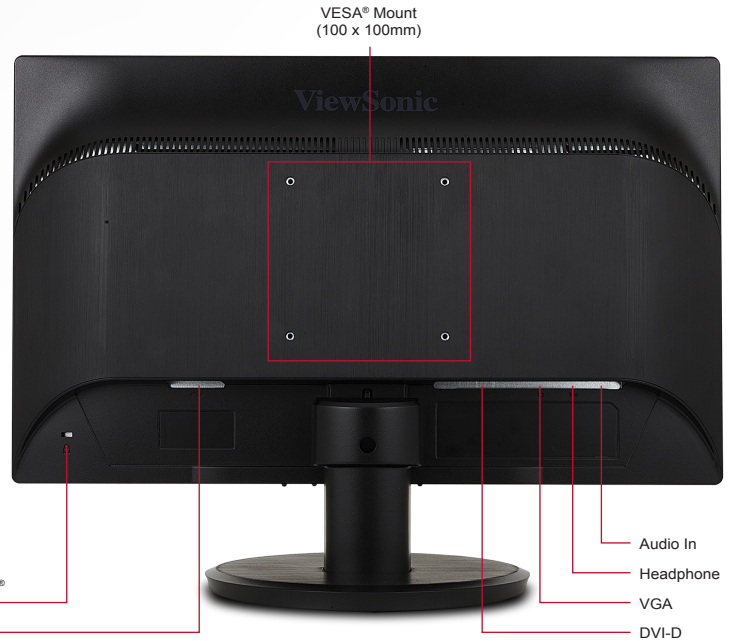

Specifications

LCD PANEL	Type	Color Active Matrix TFT LCD
	Display Area	17.1" horizontal x 9.4" vertical; 19.5" diagonal
	Optimum Resolution	1920x1080
	Brightness	250 cd/m ² (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (6bit + Hi-FRC)
	Response Time	25ms (GTG)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital	VGA, DVI-D
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green
AUDIO OUTPUT	Speakers	2-watt (x2)
COMPATIBILITY	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
CONNECTOR	Video In	VGA, DVI-D
	Audio In	3.5mm mini jack
	Headphone	3.5mm mini jack
	Power	External power adapter
CONTROLS	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 3° / Back 20°
POWER	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	24W (typ.) / 35W (max.)
	Optimize	18W (typ.)
	Conserve	15W (typ.)
OPERATING CONDITIONS	Temperature	32~104° F (0~40° C)
	Humidity	20~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	18.6 x 11.3 x 8.3 in. / 472.2 x 287.8 x 211.7 mm
	Physical without Stand	18.6 x 11.3 x 1.9 in. / 472.2 x 287.8 x 47.5 mm
	Packaging	20.9 x 15.9 x 4.3 in. / 531 x 405 x 110 mm
WEIGHT	Net with Stand	6.8 lb. / 3.1 kg
	Net without Stand	5.4 lb. / 2.5 kg
	Gross	9.3 lb. / 4.2 kg
WALL MOUNT	VESA	100 x 100mm
REGULATIONS		US NRTL w/CA (cULus/cTUVus/cETLus/cBVus), FCC-B w/ICES003, ENERGY STAR, Mexico, Mexico Energy, EPEAT Silver
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

ViewSonic HDMI male to DVI male cable 1.8 meter CB-00008948

What's in the box?

VA2055Sm monitor, Power cable, VGA cable, DVI cable, Quick Start Guide



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.