


P1: M-003

P2: M-042

Customer No.: NO.1

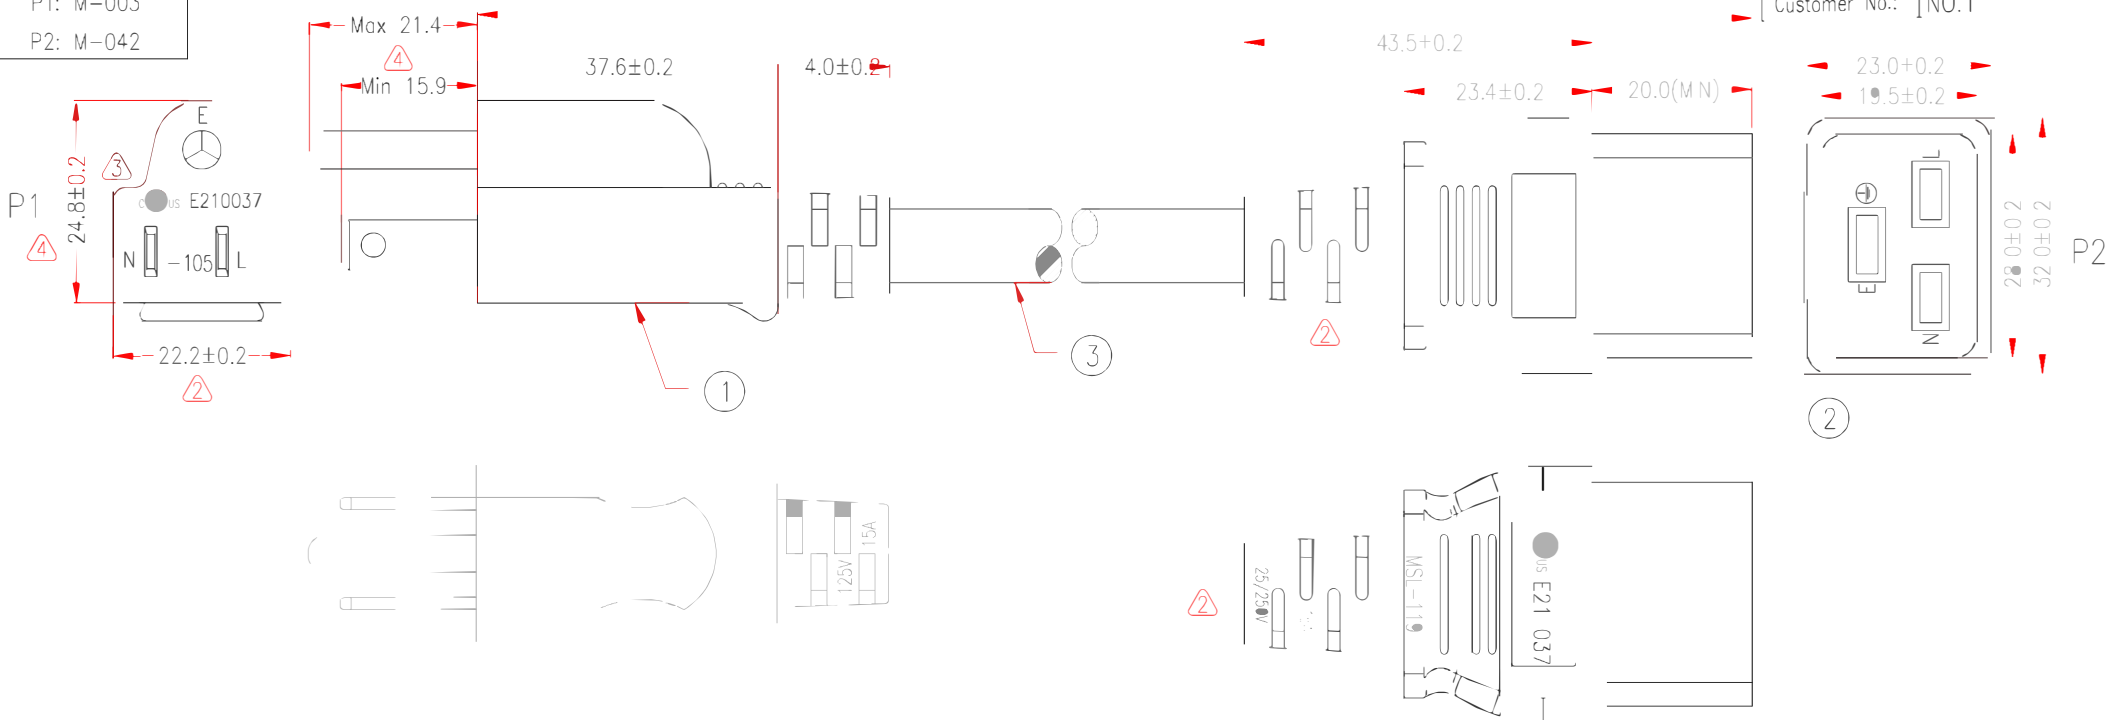

NOTE: All relevant materials are complied with RoHS directive

MARKING:

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978
 CSA SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V 204790 MSL

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-147	H5TC21-0304K09	L-30mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YST-037	A1QC36-0767	1	M767
	TERMINAL 98739ABS-0	A1QB33-0257	3	M257
1	MOLDED PVC BLACK, 35P	H1BC02-0304K09		M304
	BRACKET: YS-002	A1QC07-0767	1	M767
	TERMINAL: 98661BS-1	A1QB01-0257	2	M257
	TERMINAL 4.75mm, 98475BS-1	A1QB06-0257	1	M257

No.				Q'TY	Supplier
-----	--	--	--	------	----------

APPROVED					Cable Length Unless Other Spec. Tolerances: 0~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	25/MAR/18	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	ZHU	25/MAR/18	PRODUCT NO.	UNIT mm	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm