





# **DuraScan<sup>®</sup> D750**

#### **Universal Barcode Scanner**

The D750 is the latest and improved version of the universal Bluetooth® barcode scanner. Built for mobility and redesigned for improved durability. The D750 is IP54 compliant, ideal for warehousing and manufacturing application customers. In addition, Socket Mobile has added a field-replaceable battery based on customer feedback. The scanner is MFi certified and fully compatible with Android and Windows with different Capture SDK versions available.

The D750 delivers exceptional scanning abilities, provides data editing and provides omni-directional scanning. The LEDbased aimer reads imperfect barcodes indoors and outdoors, on paper and on screen, while the motion tolerance provides faster scans and extended scanning range. It features great ergonomics, fits perfectly in your hand and is small enough to fit in your pocket. The D750 is fully backwards compatible with prior versions of Socket Mobile's SDK and can be used immediately with any

application using native scanning support. To enjoy optimal reliability and performance from the D750, it is recommended that users check with their app provider to ensure they have upgraded to the latest version of Capture SDK.















#### **Features**

- · Certified by Apple® for iOS devices (iPad°, iPhone°, iPod Touch°) and compatible with Android, Windows°, Mac and
- Scanning Rapid 2D and 1D omni-directional barcode scanning with highly visible and safe LED aimer, suited for environments prohibiting lasers. Scans on paper or screens.
- · Bluetooth Wireless Technology Dependable Bluetooth connection to iOS, Android and Windows 10 devices. Auto-
- reconnection maintains even in different environments. • Exceptional Ergonomics – Small, light and fits perfectly in the hand for comfortable use over extended periods of time.
- Long-Lasting, Rechargeable, Replaceable Battery Power to last over 16 hours.
- Compatible with Android and Windows devices and applications
- Decoding Ability Reads damaged, poorly printed, overlaid or colored barcodes. The scanner corrects many barcode imperfections.
- Motion Tolerance Allows for faster scanning (steady hands not required).
- LED Aimer Safe, yet pronounced, highly visibly red LED scanning line (easily aims in low light or indoor environment).
- User Indicators Intuitive LEDs for Bluetooth connection, battery level and scanning status
- User Feedback Audible tones and hand pulsation
- Data Editing Add or remove characters and control characters
- Rugged Design IP54 rating for dust and water splashing; withstands multiple drops.
- Auto Scan Mode Provides continuous scanning capabilities without pressing scan button.
- Native App Support Socket Mobile's Capture SDK enables easy native app integration in your applications to improve business productivity.
- Wearable Includes wrist strap. Holster and Durable Retractable Clip available (sold separately)
- · Designed and Assembled in the USA
- 1-Year Warranty
- Developer Support Available

# PHYSICAL CHARACTERISTICS





# SINGLE PACKAGE INCLUDES


- (1) DuraScan D750, Universal Barcode Scanner and Rechargeable Battery (pre-installed)
- (1) Charging Cable
- (1) Wrist Strap
- (1) Get Started insert

The D750 is available in 4 colors:

Black(SKU# CX3762-2414) Gray (SKU# CX3359-1681) Red (SKU# CX3742-2394) White (SKU# CX3752-2404)



# OPTIONAL ACCESSORIES

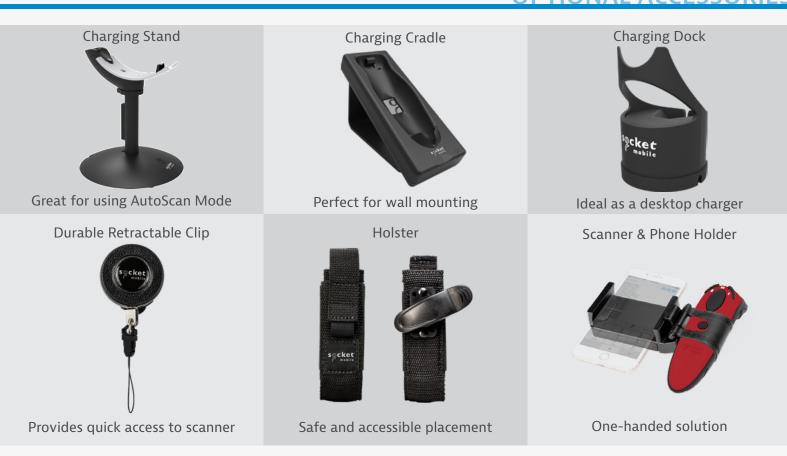

## SCANNING PERFORMANCE

Default Barcode Symbologies:

1D Symbologies: Bookland EAN, Codabar, Code 39, Code 93/93i, Code 128, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1-128, Interleaved 2 of 5, UPC A, UPC E

2D Symbologies: Aztec, Data Matrix, Maxicode, QR Code

Supported Barcode Symbologies:

1D Symbologies: Bookland EAN, Codabar, Code 11, Code 39, Code 93/93i, Code 128, EAN-13/JAN, EAN-8/JAN, GS1 Databar, GS1 DataBar Expanded, GS1 DataBar Limited, GS1-128, Interleaved 2 of 5, ISBT 128, Matrix 2 of 5, MSI, Plessey Code, Standard 2 of 5, Telepen, UPC A, UPC E

2D Symbologies: Aztec, Codablock, Data Matrix, Han Xin, Maxicode, Micro PDF417, PDF417, QR Code Postal Codes: Australian Post, BPO, Canada Post, Dutch Post, Infomail, Intelligent Mail, Japan Post,

Postnet, Sweden Post


39° (Horizontal) -25.5° (Vertical) Scan Angle:

Optical Resolution: 752 (H) x 480 (V) pixels, 256 gray levels

Print Contrast:

Down to 30%

Reading Distance:

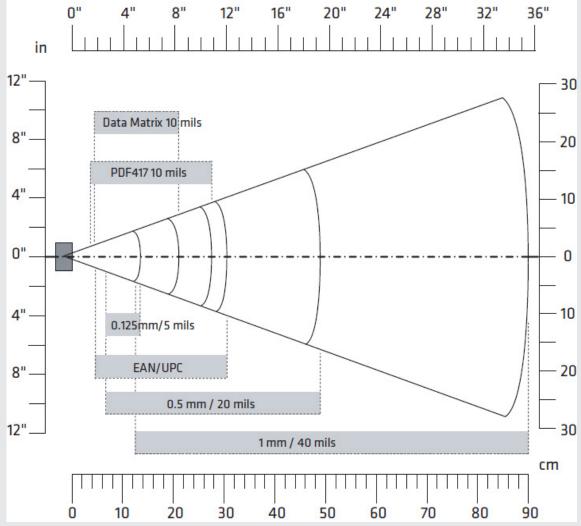

1D codes 4.5 to 90 cm (1.97 in to 35.43 in) 2D codes 4.5 to 40 cm (1.97 in to 15.75 in)

Depends on barcode size, symbology, label media

Decode Ranges:

	Near	Far
4 mil Code 39	3.3 in/8.4 cm	8.8 in/22.4 cm
5 mil Code 128	2.8 in/7.1 cm	8.2 in/20.8 cm
5 mil Code 39	2.0 in/5.08 cm	13.5 in/34.3 cm
10 mil Data Matrix	2.9 in/7.4 cm	10.1 in/25.7 cm
100% UPC A	1.8 in/4.6 cm*	26.0 in/66.0 cm
20 mil Code 39	2.0 in/5.08 cm*	30.0 in/76.2 cm

Technology: 2D/1D Barcode Imager with highly visible LED aimer

Light Source: Highly Visible white LED.

Aimer: 617 nm Red LED

### **BATTERY**

Battery Type: Replaceable 1400 mAh Lithium - Ion Battery

Charge Time: 6 Hours

Battery Life - Standby time: over 30 hours

Per Full Charge: Active Scan Time: 70,000 scans within 9 hours (based on 2 scans every 1 second)

14,000 scans within 16 hours (based on 1 scan every 4 seconds)

Note: Battery life varies depending on ambient temperature, ambient light and age of battery.

For more battery information <u>click here</u>.

Number of Batteries Used: 1

Weight of Battery: 35g
Percentage Lithium: 26.5%

Battery mAh: 1500 mAh

Number of Cells Per Battery: 1
Watt Hours Per Battery: 5.55

Type of Cell (ex. AA): Proprietary

Chemical Composition (ex. Lithium-polymer

Alkaline):

Lithium Content: 9.32g
Battery Voltage: 3.7v

Hazmat UN Number: UN3481, P.I. 967

ROHS Compliance Indicator: Yes, included with scanner

Country of Origin: China

Commodity Code: 8507.60.0000

# **BLUETOOTH (WIRELESS CONNECTION)**

Bluetooth Radio: Class 2 Bluetooth, version 2.1 + EDR (Enhanced Data Rates) with 56-bit data encryption

Bluetooth Range: Up to 10 meters (33 ft.) depending on environment, range limit is usually due to the Host Device

(phone, tablet or notebook)

## **USER ENVIRONMENT**

Ambient Light: From 0 to 100 000 lux, From pitch black to direct sun light

Operating  $-20^{\circ}$  to  $50^{\circ}$  C ( $-4^{\circ}$  to  $122^{\circ}$  F)

Temperature:

Storage Temperature: -40° to 70° C (-40° to 158° F)

Relative Humidity: 95% at 60° C (140° F) (non-condensing)

Sealing: IP54 (Ingress Protection rating for dust and water) EN60529

Tumble Specification: 2,500 cycles at 3.3 ft. (1 m) to metal plate, IEC6008-2-31, IEC60068-2-32 3

Drop Specification: 6 drops to concrete - 1 on each side at 6.6 ft. (2 m)

# **OPERATING SYSTEM COMPATIBILITY**

Android OS - Basic Mode (HID)\* and App Mode (SPP)

Mac OS - Basic Mode (HID)\* only

Apple iOS - Basic Mode (HID)\* and App Mode (MFi-SPP)

Windows OS 10 - Basic Mode (HID)\* and App Mode (SPP)

Compatible with devices supporting Basic Mode (HID)\* protocol. Supported keyboard languages - ANSI, English UK, English, French, German, Italian, Japanese, Polish, Spanish and Swedish

\*By default, the factory settings of the Socket Mobile Scanners are set to Basic Mode (keyboard emulation: HID). In order to use the scanner with an application using Capture SDK, the scanner must be configured in Application Mode (Bluetooth Serial Port Profile: SPP)











## **CERTIFICATION & REGULATORY**

Bluetooth SIG: Declaration ID: D030473 QD ID: 82009

Electrical Safety: Certified to IEC 60950-1, UL 60950-1, CAN/CSA C22.2

**Environmental:** Environmental: RoHS EN 50581

EMI / RFI: FCC Part 15 Class C, RSS 210, iCES 003, C-Tick, CISPR 22, CE EN55022, EN55024, TELEC

> FCC ID: LUBD750 IC ID: 2925A-D750 CMITT ID: 2016DJ7651 Telec ID: R 211-161214

IEC/EN 62471 (EXEMPT GROUP) LED Safety:















SRRC





## WARRANT

Scanner: Standard one year limited warranty for barcode scanners

Accessories: 90 days for batteries, charging cable and wrist strap

Extended Warranty: www.socketmobile.com/socketcare

(sold separately)



# **COMMON USES**

Retail/Point of Sale Warehouse management Transportation Office use Shipping and Receiving Gaming Healthcare Field Sales/Service Hospitality Mobile Tracking Banking

socketmobile.com

sales@socketmobile.com

+1 800 552 3300 (USA/Canada) +33 970 462 241

Asia Pacific: +1 510 933 3122

+41 62 834 07 80

EMEA and Russia:

+41 62 834 07 80 +8190 9808 0518

+1 510 933 3153

+41 62 834 07 80 Switzerland:

+44 (0) 1252 761403 +44 7787 112109