



Lexmark T650dn

Great value and duplex printing for your performance-seeking business

Print Technology

Monochrome Laser

Print Speed (A4, Black)

Up to 43 ppm

Print Speed (A4, Black) Duplex

Up to 35 ppm

Time to First Page (Black)

As fast as 7.5 seconds

Print Resolution, Black

1200 Image Quality, 1200 x 1200 dpi, 2400 Image Quality, 600 x 600 dpi

Processor

500 MHz

Memory, Standard

128 MB

Memory, Maximum

640 MB

Expandable Memory Options

Yes

Apple Macintosh Operating Systems Supported

Mac OS X, Mac OS 9.x

Citrix MetaFrame

Microsoft Windows 2000 Server running Terminal Services with Citrix Presentation Server 3.0, 4.0, Microsoft Windows Server 2003 running Terminal Services with Citrix Presentation Server 3.0, 4.0, 4.5, Microsoft Windows Server 2003 x64 running Terminal Services with Citrix Presentation Server 4.0 x64, 4.5 x64

Linux Operating Systems Supported

Linpus Linux Desktop 9.2, 9.3, Red Hat Enterprise Linux WS 3.0, 4.0, 5.0, SUSE Linux Enterprise Server 8.0, 9.0, 10.0, SUSE Linux Enterprise Desktop 10, openSUSE 10.2, 10.3, 11.0, Linspire Linux 6.0, Debian GNU/Linux 4.0, Red Flag Linux Desktop 5.0, 6.0, Ubuntu 7.10, Ubuntu 8.04 LTS

Microsoft Windows Operating Systems Supported

2000, XP, Server 2003, XP x64, Server 2003 running Terminal Services, 2000 Server running Terminal Services, Server 2003 x64, Server 2003 x64 running Terminal Services, Vista, Vista x64, Server 2008, Server 2008 x64, Server 2008 running Terminal Services, Server 2008 x64 running Terminal Services

Novell Operating Systems Supported

Open Enterprise Server for Netware with NDS, iPrint or Novell Distributed Print Services (NDPS), NetWare® 3.2, 4.2 (bindery), NetWare 4.2, 5.x and 6.x (NDS), NetWare 5.x, 6.x with iPrint or Novell Distributed Print Services (NDPS)

UNIX Operating Systems Supported

Sun Solaris SPARC 8, 9, 10, Sun Solaris x86 10, HP-UX 11.11, 11.23, 11.31, IBM AIX 5.2, 5.3, 6.1

Other Operating Systems Supported

IBM iSeries or IBM AS/400® Systems with TCP/IP with OS/400® V3R1 or later using OS/400 Host Print Transform, Virtually any platform supporting TCP/IP

Paper Handling Standard

250-Sheet Duplex Unit, 100-Sheet Multipurpose Feeder, 250-Sheet Input Tray, 350-Sheet Output Bin

Paper Handling Optional

1,850-Sheet High-capacity Output Stacker, 200-Sheet Universally Adjustable Tray with Drawer, 400-Sheet Universally Adjustable Tray with Drawer, 5-Bin Mailbox, 550-Sheet Drawer, Envelope Feeder, 250-Sheet Drawer, Optional furniture required., 2,000-Sheet High-capacity Feeder, 550-Sheet Output Expander, StapleSmart II Finisher

Paper Input Capacity, Standard: Up to

350 pages 20 lb or 75 gsm bond

Paper Input Capacity, Maximum: Up to

4000 pages 20 lb or 75 gsm bond

Paper Output Capacity, Standard: Up to

350 pages 20 lb or 75 gsm bond

Paper Output Capacity, Maximum: Up to

2750 pages 20 lb or 75 gsm bond

Envelope Capacity

85

Finishing Option

Yes

Number of Paper Inputs, Standard

2

Number of Paper Inputs, Maximum

6

Media Types Supported

Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Polyester Labels, Transparencies, Vinyl Labels, Refer to the Card Stock & Label Guide

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, DL Envelope, A6 Card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal

Connectivity (standard)

Fast Ethernet, One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified, Front USB port Compatible with USB 2.0 Specification (Type A)

Connectivity (optional)

Lexmark N4050e 802.11g Wireless Print Server (Print Only), External MarkNet™ N7020e Gigabit Ethernet, Internal MarkNet™ N8120 Gigabit Ethernet, Internal MarkNet™ N8130 Fiber Fast Ethernet, Internal MarkNet™ N8150 802.11g Wireless

Network Printing Methods

LPR/LPD, Direct IP (Port 9100), Socket (Raw TCP/IP), HTTP, NDS Queue-based Printing, NDPS/NEPS (Novell Distributed Print Services, Novell Netware Enterprise Print Services), Enhanced IP (Port 9400), FTP, TFTP, IPP 1.1 (Internet Printing Protocol), ThinPrint .print integration

Network Protocol Support

TCP/IP IPv4, IPX/SPX, AppleTalk™, JisLink (DLC), TCP/IP IPv6, TCP, UDP

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPsec

Printable Area

4.2 mm of the top, bottom, right and left edges (within

Printer Languages (Standard)

PCL 5e Emulation, PCL 6 Emulation, PPDS, PostScript 3 Emulation, xHTML, PDF 1.6, Direct Image, Microsoft XPS (XML Paper Specification)

Supplies Yield

25,000*-page High Yield Print Cartridge, *Average standard page yield value declared in accordance with ISO/IEC 19752., 7,000*-page Print Cartridge

Cartridge(s) Shipping with Product

7,000*-page Return Program Print Cartridge

Packaged Size (mm - H x W x D)

804 x 695 x 535 mm

Size (mm - H x W x D)

402.5 x 425 x 640 mm

Size (in. - H x W x D)

15.8 x 16.7 x 25.2 in.

Weight (kg)

23.4 kg

Acoustics/Noise level (Idle mode)

26 dBA

Acoustics/Noise level (Operating mode)

53 dBA

Product Guarantee

1 Year Onsite, Next Business Day

Product Certifications

Energy Star, CAN/CSA-C22.2 60950-1, CSA E60825-1, ICES-003 Class B, BSMI Class B, CNS 13438, VCCI Class B, US FDA, FCC Class B, UL 60950-1, IEC 320-1, EN/IEC 60320-1, CE Class B, CB IEC 60950-1, EN 60950-1, EN/IEC 61000-3, EN 55022 Class B, EN 55024, EN/IEC 60825-1, GS (TÜV), SEMKO, UL AR, CS, TÜV Rh, SMA C-tick mark Class B, CCC Class B, CISPIR 22 Class B, EK Mark, N Mark

Maximum Monthly Duty Cycle


Up to 200000 pages per month

Recommended Monthly Page Volume

3000 - 20000 pages

Specified Operating Environment

Temperature: 16 to 32°C (60 to 90°F), Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet)

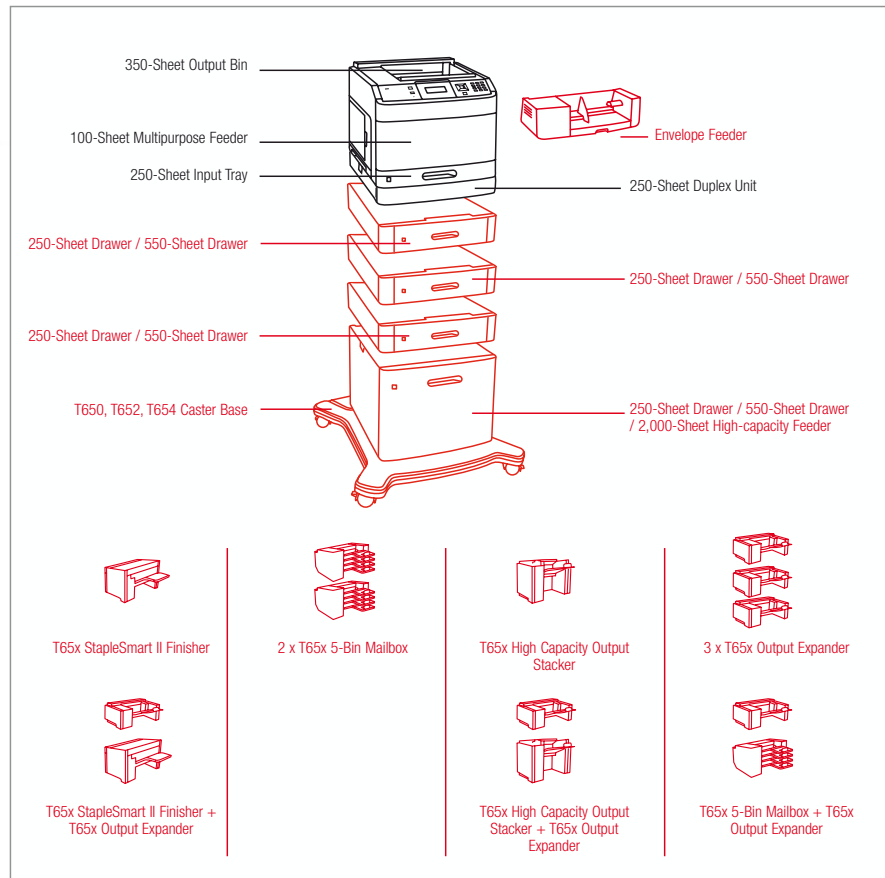

■ Paper Handling Standard
 ■ Paper Handling Optional

Part # Model

0030G0129 Lexmark T650dn

Part # Laser Toner/Print Cartridge

OT650H11E T650, T652, T654 High Yield Return Program Print Cartridge
 OT650A11E T650, T652, T654 Return Program Print Cartridge
 OT650H04E T650, T652, T654 High Yield Return Program Print Cartridge for Label
 OT650H21E T650, T652, T654 High Yield Print Cartridge
 OT650A21E T650, T652, T654 Print Cartridge
 0025A0013 Staple Cartridges (3 pack)

Part # Paper & Transparencies

0012A5010 Lexmark Laser Printers - A4 Transparency

Part # Paper Handling

0030G0804 2000-Sheet High Capacity Feeder
 0030G0802 550-Sheet Drawer
 0030G0854 5 inch (12.7 cm) Spacer
 0030G0800 250-Sheet Drawer
 0030G0853 T65x High Capacity Output Stacker
 0030G0851 T65x Output Expander
 0030G0852 T65x 5-Bin Mailbox
 0030G0807 Envelope Feeder
 0030G0860 400-Sheet Universally Adjustable Tray with Drawer
 0030G0880 T65x Kiosk Presenter
 0030G0850 T65x StapleSmart II Finisher
 0030G0871 200-Sheet Universally Adjustable Tray with Drawer

Part # Furniture

0016M1207 T650, T652, T654 Caster Base

Part # Memory Options

001022298 128MB DDR1-DRAM
 001022299 256MB DDR1-DRAM
 001022301 512MB DDR1-DRAM
 0014F0245 256MB Flash Card
 0014F0102 80+GB Hard Disk

Part # Application Solutions

0030G0829 Lexmark PrintEncryption Card
 0030G0830 T650, T652 Forms and Bar Code Card
 0030G0831 T650, T652 Card for IPDS/SCS/TNe

Part # Connectivity

001021294 USB (2 Meter) Cable
 0014F0000 Parallel 1284-B Interface Card
 001021231 Parallel (10") Cable
 0014F0100 RS-232C Serial Interface Card
 0014F0037 MarkNet N8120 Gigabit Ethernet Print Server
 0014F0042 MarkNet N8130 Fiber Ethernet 100BaseFX, 10BaseFL Print Server

0014F0045 MarkNet N8150 802.11b/g/n Wireless Print Server
 0014T0155 Lexmark N4050e 802.11g Wireless Print Server
 0014T0220 MarkNet™ N7020e Gigabit Ethernet Print Server

Part # Extended Warranties

002350302 2-Years Total Onsite Service, Next Business Day
 002350303 3-Years Total Onsite Service, Next Business Day
 002350304 4-Years Total Onsite Service, Next Business Day
 002350306 1-Year Onsite Service Renewal, Next Business Day

Part # User Replaceable Parts

0040X4765 T65x, X654e, X656e, X658e Fuser Maintenance Kit 220-240V
 0040X2665 Oil Fuser Wiper
 0040X2666 Wax Fuser Wiper

Part # Installation Service

002350326 T650 Install, De-Install Service