Cisco Headset 560 Series with Multibase



High Sound Pressure—Avoid listening to high volume levels for long periods to prevent possible hearing damage.

When you plug in your headset, lower the volume of the headset speaker before you put the headset on. If you remember to lower the volume before you take the headset off, the volume will start lower when you plug in your headset again.

Be aware of your surroundings. When you use your headset, it may block out important external sounds, particularly in emergencies or in noisy environments. Don't use the headset while driving. Don't leave your headset or headset cables in an area where people or pets can trip over them. Always supervise children who are near your headset or headset cables.


Power/Call O Mute O Volume +/- Bluetooth Micro USB port USB port USB port

Headset LED status indication

Incoming Call	Blinks red
Active Call	Steady red
Headset paired with dock	White LED blinks every 4 seconds
Headset and dock not paired	White LED blinks rapidly

Base LED status indication

Headset battery strength	LEDs show solid as battery charges
System update	LEDs blink in sequence left to right.
Headset and base not paired	All LEDs blinking

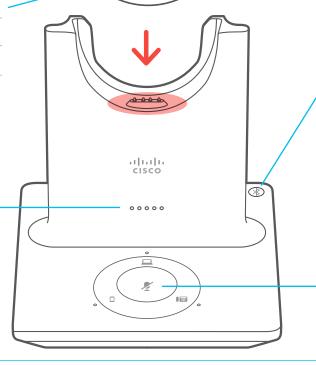

Bluetooth status indication

Bluetooth pairing	LED blinks
Bluetooth connected	LED shows solid
Bluetooth on but not connected to a device	LED pulses
Bluetooth off	LED off

Source call status

Selected source	Steady White	0
Incoming Call	Blinks green	*
Active Call	Steady green	•
Unselected source with an active call	Pulses green	•
Muted	Steady red	<u>X</u>

Cisco Headset 560 Series with Multibase

Turn on or off your headset

Hold of for 4 seconds.

You will hear a tone indicating headset status.

Make and answer calls

Press O

Put a call on hold

Press O

End a call

Hold until you hear a tone.

Reject a call

Press o twice.

Adjust your volume

Press ——).

Mute yourself on a call

Press .

End an active call and answer an incoming call

- 1. Hold o until you hear a tone.
- 2. Press or press the source button on the base.

End a call and resume a held call on a Cisco IP Phone

- 1. Hold o until you hear a tone.
- 2. With your IP Phone selected on the base, select the call you want to resume.
- 3. Press O.

Put a call on hold and resume a call on a Cisco IP Phone

- 1. Press O.
- 2. (Optional) Select the call you would like to resume.
- 3. Press o again.

Pair your base with a Bluetooth device

- 1. Press ® twice.
- In your device settings, select your headset.
 The headset base will show as "Cisco Headset" followed by the last three digits of your headset serial number.

Unpair and forget all paired Bluetooth devices

Hold for 4 seconds.

Switch between audio sources

Press the desired call source on the headset base. The source LED on the headset base shows steady white when selected.

Answer a call from a different source

- On the headset base, press the incoming call source button.
- (Optional) You can answer the call from the incoming source. The base automatically switches to the new active source.

For more information, visit: http://www.cisco.com/go/headsets

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)