


Overview

HP EliteDesk 800 G1 Desktop Mini Business PC

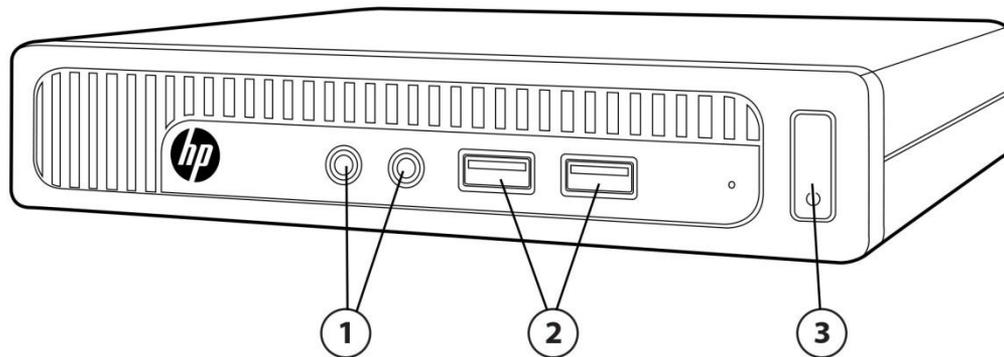


1. 3.5mm headphone output and microphone jacks
2. (2) Front USB 3.0 ports (1 USB Fast charging port)
3. Power button and PC status LED

Not Shown

- | | |
|----------|---|
| Slots | (1) internal M.2 PCIe x4 connector for optional wireless NIC
(1) internal M.2 PCIe x4 connector for optional SSD drive |
| Bays | (1) 2.5" internal storage drive bay |
| Rear I/O | (4) USB 3.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
3.5mm audio out jack |
| VESA | Support for VESA 100 mounting system on bottom of PC chassis |

Overview

HP EliteDesk 800 G1 Ultra-slim Desktop Business PC

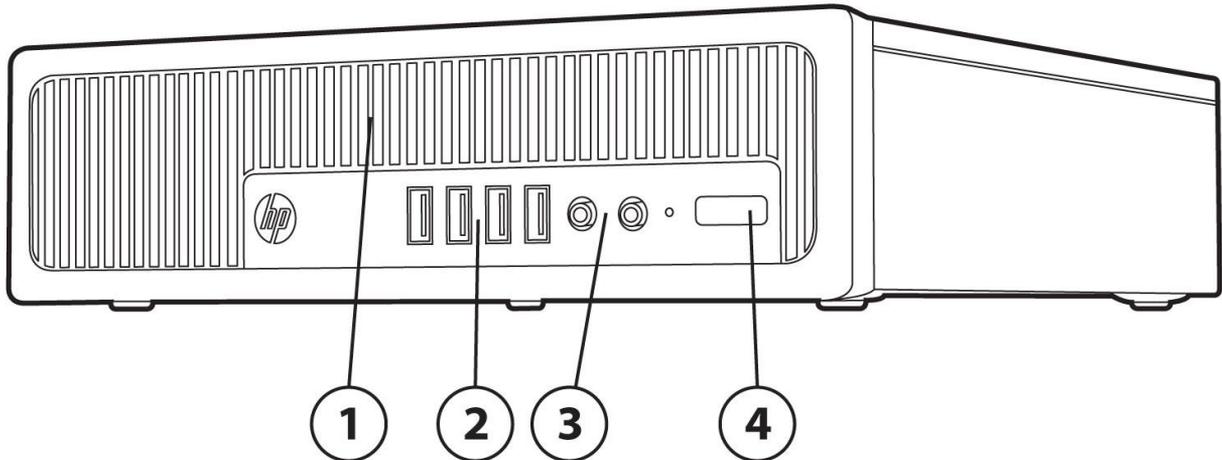


1. 5.25" Slim drive bay supporting an optical disk drive (located behind removable bezel)
2. (2) USB 3.0 ports, (2) USB 2.0 ports
3. 3.5mm headphone output and microphone jacks
4. Power button and PC status LED

Not Shown

- Slots (1) internal mSATA connector
(1) internal PCI Express mini-card connector
(1) MXM graphics connector
- Bays (1) 2.5" internal storage drive bay
- Rear I/O (2) USB 3.0 ports; (4) USB 2.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
3.5mm audio in/out jacks
PS/2 keyboard and mouse ports
- VESA Support for VESA 100 mounting system on top and bottom of PC chassis

Overview

HP EliteDesk 800 G1 Small Form Factor Business PC

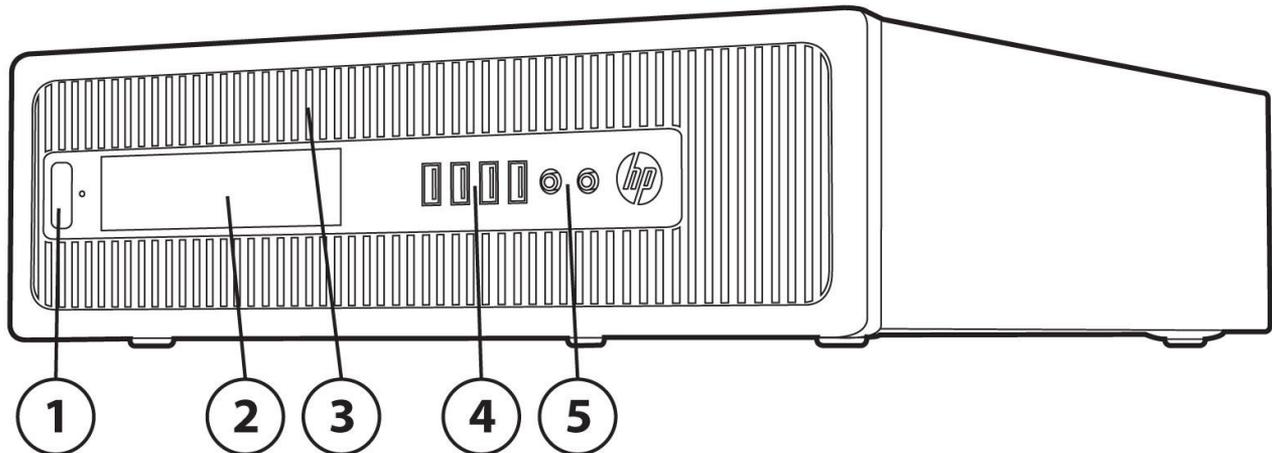


1. Power button and PC status LED
2. 3.5" external drive bay; used for installing a Media Card Reader or 2nd data storage drive
3. 5.25" Slim drive bay supporting an optical disk drive (located behind removable bezel)
4. (2) USB 3.0 ports, (2) USB 2.0 ports
5. 3.5mm headphone output and microphone jack

Not Shown

- | | |
|----------|---|
| Slots | (2) PCI Express x16 graphics connectors; one wired as a x4
(2) PCI Express x1 accessory connectors |
| Bays | (1) 2.5" internal storage drive bay
(1) 3.5" internal storage drive bay |
| Rear I/O | (2) USB 3.0 ports; (4) USB 2.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
(1) RS-232 serial port
3.5mm audio in/out jacks
PS/2 keyboard and mouse ports |

Overview

HP EliteDesk 800 G1 Tower Business PC

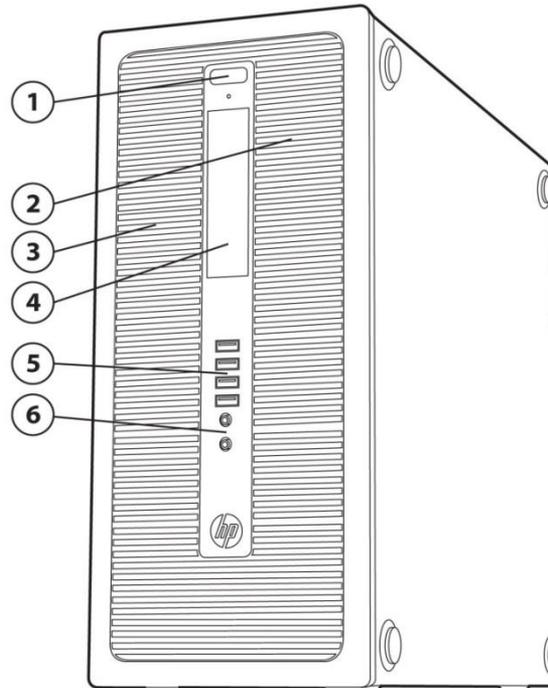

1. Power button and PC status LED
2. 5.25" Slim drive bay supporting an optical disk drive (located behind removable bezel)
3. 5.25" half height external drive bay (located behind removable bezel)
4. 3.5" external drive bay; used for installing a Media Card Reader
5. (2) USB 3.0 ports, (2) USB 2.0 ports
6. 3.5mm headphone output and microphone jack

Not Shown

- Slots (2) PCI Express x16 graphics connectors; one wired as a x4
(2) PCI Express x1 accessory connectors
(1) PCI accessory connector (optional)
- Bays (1) 2.5" internal storage drive bay
(2) 3.5" internal storage drive bays
- Rear I/O (2) USB 3.0 ports; (4) USB 2.0 ports
(1) VGA video port; (2) DisplayPort with multi-stream video ports
(1) RJ-45 network connector
(1) RS-232 serial port
3.5mm audio in/out jacks
PS/2 keyboard and mouse ports

Overview

At A Glance

- Choice of four chassis form factors: Desktop Mini, Ultra-slim Desktop, Small Form Factor and Tower
- PC chassis and all internal components and modules are manufactured with low halogen content
- HP developed and engineered UEFI BIOS supporting security, manageability and software image stability
- Intel® Q87 chipset supporting Intel 4th generation Core processors, featuring integrated Intel HD Graphics and Intel® vPro™ Technology (available with select processors)
- Processor support up to 84W (TWR/SFF), 65W (USDT), 35W (DM)
- Intel® Ethernet Connection I217L GbE LOM integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Multi-independent monitor support via VGA and dual digital DisplayPort video interfaces with multi-stream
- DTS Studio Sound audio management software
- Standard and high efficiency energy saving power supply options
- SFF and TWR models can be configured with multiple data drives in a RAID array
- Optional Intel Smart Response Technology disk cache modules
- ENERGY STAR® qualified and certified EPEAT® Gold models
- Guaranteed lengthy purchase lifecycles and image stability

Technical Specifications – Core vPro Processors

STANDARD FEATURES AND CONFIGURABLE COMPONENTS

CHIPSET

	<u>DM</u>	<u>USDT</u>	<u>SFF/TW</u>
Intel® Q87 Express	X	X	X

PROCESSOR

Intel® 4th Generation Core™ i7 Processors

Intel® Core™ i7-4790 Processor

Up to 4.0 GHz Max. Turbo Frequency (3.6 GHz base frequency)
 8 MB cache, 4 cores, 8 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
		X

Intel® Core™ i7-4790S Processor

Up to 4.0 GHz Max. Turbo Frequency (3.2 GHz base frequency)
 8 MB cache, 4 cores, 8 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i7-4785T Processor

Up to 3.2 GHz Max. Turbo Frequency (2.2 GHz base frequency)
 8 MB cache, 4 cores, 8 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i7-4771 Processor

Up to 3.9 GHz Max. Turbo Frequency (3.5 GHz base frequency)
 8 MB cache, 4 cores, 8 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i7-4770 Processor

Up to 3.9 GHz Max. Turbo Frequency (3.4 GHz base frequency)
 8 MB cache, 4 cores, 8 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i7-4770S Processor

Up to 3.9 GHz Max. Turbo Frequency (3.1 GHz base frequency)

X

Technical Specifications – Core vPro Processors

8 MB cache, 4 cores, 8 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i7-4765T Processor

X

Up to 3.0 GHz Max. Turbo Frequency (2.0 GHz base frequency)
 8 MB cache, 4 cores, 8 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® 4th Generation Core™ i5 Processors

DM

USDT

SFF/TWR

Intel® Core™ i5-4690 Processor

X

Up to 3.9 GHz Max. Turbo Frequency (3.5 GHz base frequency)
 6 MB cache, 4 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i5-4690S Processor

X

Up to 3.9 GHz Max. Turbo Frequency (3.2 GHz base frequency)
 6 MB cache, 4 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i5-4590 Processor

X

Up to 3.7 GHz Max. Turbo Frequency (3.3 GHz base frequency)
 6 MB cache, 4 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i5-4590S Processor

X

Up to 3.7 GHz Max. Turbo Frequency (3.0 GHz base frequency)
 6 MB cache, 4 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i5-4590T Processor

X

Up to 3.0 GHz Max. Turbo Frequency (2.0 GHz base frequency), 6 MB cache, 4 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Technical Specifications – Core vPro Processors

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

Intel® Core™ i5-4670 Processor

Up to 3.8 GHz Max. Turbo Frequency (3.4 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i5-4670S Processor

Up to 3.8 GHz Max. Turbo Frequency (3.1 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i5-4570 Processor

Up to 3.6 GHz Max. Turbo Frequency (3.2 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i5-4570S Processor

Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency)

6 MB cache, 4 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® Core™ i5-4570T Processor

Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency)

4 MB cache, 2 cores, 4 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP)

X

Intel® 4th Generation Core™ i3 Processors

Intel® Core™ i3-4370 Processor

3.8 GHz base frequency

4 MB cache, 2 cores, 4 threads

Intel® HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

DM

USDT

SFF/TWR

X

X

Intel® Core™ i3-4360 Processor

X

X

Technical Specifications – Core vPro Processors

3.7 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4350 Processor

X X

3.6 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4350T Processor

X

3.1 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4360T Processor

X

3.2 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4600
 Supports DDR3 and DDR3L memory up to 1333/1600 MT/s data rate

Intel® Core™ i3-4340 Processor

X X

3.6 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4330 Processor

X X

3.5 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4330T Processor

X

3.0 GHz base frequency
 4 MB cache, 2 cores, 4 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4170 Processor

X X

3.7 GHz base frequency
 3 MB cache, 2 cores, 4 threads
 Intel® HD Graphics 4400
 Supports DDR3 memory up to 1600 MT/s data rate

Technical Specifications – Core vPro Processors

<u>Intel® Core™ i3-4160 Processor</u>		X	X
3.6 GHz base frequency			
3 MB cache, 2 cores, 4 threads			
Intel® HD Graphics 4400			
Supports DDR3 memory up to 1600 MT/s data rate			
<u>Intel® Core™ i3-4160 T Processor</u>	X		
3.1 GHz base frequency			
3 MB cache, 2 cores, 4 threads			
Intel® HD Graphics 4400			
Supports DDR3 and DDR3 memory up to 1333/1600 MT/s data rate			
		X	X
<u>Intel® Core™ i3-4150 Processor</u>			
3.5 GHz base frequency			
3 MB cache, 2 cores, 4 threads			
Intel® HD Graphics 4400			
Supports DDR3 memory up to 1600 MT/s data rate			
<u>Intel® Core™ i3-4150T Processor</u>	X		
3.0 GHz base frequency			
4 MB cache, 2 cores, 4 threads			
Intel® HD Graphics 4400			
Supports DDR3 memory up to 1600 MT/s data rate			
		X	X
<u>Intel® Core™ i3-4130 Processor</u>			
3.4 GHz base frequency			
3 MB cache, 2 cores, 4 threads			
Intel HD Graphics 4400			
Supports DDR3 memory up to 1600 MT/s data rate			
		X	X
<u>Intel® Core™ i3-4130T Processor</u>	X		
2.9 GHz base frequency			
3 MB cache, 2 cores, 4 threads			
Intel HD Graphics 4400			
Supports DDR3 ,memory up to 1600 MT/s Data Rate			
<u>Intel® Core™ i3-4160T</u>	X		
3.1 GHz base frequency, 3 MB cache, 2 cores, 4 threads			
Supports DDR3 memory 1600 MT/s data rate			
Intel HD Graphics 4400			
<u>Intel® Core™ i3-4360T</u>	X		
3.2 GHz base frequency, 4 MB cache, 2 cores, 4 threads			
Supports DDR3 memory 1600 MT/s data rate			
Intel HD Graphics 4600			
Intel® 4th Generation Pentium™ Processors	DM	USDT	SFF/TWR
<u>Intel® Pentium G3470 Processor</u>		X	X
Up to 3.6 GHz Base Frequency			
3 MB cache, 2 cores, 2 threads			

Technical Specifications – Core vPro Processors

Intel HD Graphics

Supports DDR3 memory up to 1600 MT/s data rate

Intel® Pentium G3460 Processor

Up to 3.5 GHz Base Frequency

3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Pentium G3460T Processor

Up to 3 GHz Base Frequency

3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 and DDR3L memory up to 1333/1600 MT/s data rate

X X X

Intel® Pentium G3450 Processor

Up to 3.4 GHz Base Frequency

3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Pentium G3440 Processor

Up to 3.3 GHz Base Frequency

3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Pentium™ G3440T Processor

2.8 GHz base frequency

3 MB cache, 2 cores, 2 threads

Intel® HD Graphics

Supports DDR3 memory up to 1600 MT/s data rate

X

Intel® Pentium G3430 Processor

3.3 GHz base frequency

3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1600 MT/s data rate

X X

Intel® Pentium G3420 Processor

3.2 GHz base frequency

3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1600 MT/s data rate

X X

Technical Specifications – Core vPro Processors

<p><u>Intel® Pentium™ G3420T Processor</u> 2.7 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>	X			
<p><u>Intel® Pentium G3260 Processor</u> Up to 3.3 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate</p>		X		X
<p><u>Intel® Pentium G3250 Processor</u> Up to 3.2 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate</p>		X		X
<p><u>Intel® Pentium G3250T Processor</u> Up to 2.8 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate</p>	X		X	X
<p><u>Intel® Pentium G3240 Processor</u> Up to 3.1 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate</p>				
<p><u>Intel® Pentium™ G3240T Processor</u> 2.7 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel® HD Graphics Supports DDR3 memory up to 1600 MT/s data rate</p>	X			
<p><u>Intel® Pentium™ G3220 Processor</u> 3.0 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate</p>		X		X
<p><u>Intel® Pentium™ G3220T Processor</u> 2.6 GHz base frequency 3 MB cache, 2 cores, 2 threads</p>	X			

Technical Specifications – Core vPro Processors

Intel HD Graphics
Supports DDR3 memory up to 1333 MT/s data rate

Intel® Pentium® G3250T

2.8 GHz base frequency, 3 MB cache, 2 cores, 2 threads
Intel HD Graphics
Supports DDR3 memory 1333 MT/s data rate

X

Intel® Pentium® G3450T

2.9 GHz base frequency, 3 MB cache, 2 cores, 2 threads
Intel HD Graphics
Supports DDR3 memory 1600 MT/s data rate

X

Intel® 4th Generation Celeron™ Processors

DM

USDT

SFF/TWR

Intel® Celeron™ G1840T Processor

2.5 GHz base frequency
2 MB cache, 2 cores, 2 threads
Intel® HD Graphics
Supports DDR3 memory up to 1600 MT/s data rate
Max Resolution (DP) 2560x1600@60Hz

X

Intel® Celeron™ G1820T Processor

2.4 GHz base frequency
2 MB cache, 2 cores, 2 threads
Intel HD Graphics
Supports DDR3 memory up to 1333 MT/s data rate
Max Resolution (DP) 2560x1600@60Hz

X

GRAPHICS*

***NOTE:** AMD and NVIDIA graphics cards are not available on configurations with the preinstalled Windows 10 operating system. Configurations with the Windows 10 downgrade to Windows 7 operating system will allow for upgrading to Windows 10 with AMD and NVIDIA graphics cards through graphics driver installation from hp.com.

System Integrated Graphics

Intel HD Graphics on all models (integrated on processor)

DM

USDT

SFF/TWR

X

X

X

DM

USDT

SFF/TWR

Optional Discrete Graphics Solutions

AMD Radeon HD 7650A (MXM)

X

NOTE: When this MXM graphics card is installed in the USDT all three monitor ports are active. The discrete ATI graphics will operate the top DisplayPort while the Intel integrated graphics will operate the bottom Multi-Stream DisplayPort and the VGA output.

AMD Radeon HD 8350 (1GB) PCIe x16

X

AMD Radeon HD 8490 (1GB) PCIe x 16

X

Technical Specifications – Core vPro Processors

AMD Radeon R7 240 2GB FH PCIe x16 GFX			X
AMD Radeon R9 255 2GB FH PCIe x16 GFX			TWR only
NVIDIA NVS 310 (512 MB) PCIe x16			X
NVIDIA NVS 315 (1GB) PCIe x 16			X
NVIDIA GeForce GT630 (2 GB) FH PCIe x16			TWR only

Adapters and Cables

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HP DMS-59 to Dual DisplayPort Cable			X
HP DMS-59 to Dual DVI Cable			X
HP DMS-59 to Dual VGA Cable			X
HP DisplayPort to DisplayPort Cable	X	X	X
HP DisplayPort to DVI-D Adapter	X	X	X
HP DisplayPort to HDMI Adapter	X	X	X
HP DisplayPort To HDMI 1.4 Adapter	X	X	X
HP DisplayPort to VGA Adapter	X	X	X
HP Serial Port Adapter			X
HP Parallel Port Adapter			X

STORAGE*

Hard Disk Drives (HDD)

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
320 GB 7200 rpm HDD		X	
500 GB 7200 rpm HDD	X	X	X
500 GB 7200 rpm SED HDD	X	X	X
500 GB 10K rpm HDD			X
1 TB 7200 rpm HDD			X
1 TB 10K rpm HDD			X
2 TB 7200 rpm HDD			X

Solid State Hybrid Drives (SSHD)

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
500 GB SSHD (8 GB cache)	X	X	X
500GB SATA 6G 2.5 8G SSHD	X		
1 TB SSHD (8 GB cache)	X	X	X
1TB SATA 6G 2.5 8G SSHD	X		

Solid State Drives (SSD) & Self-encrypting Solid State Drives (SED)

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
120 GB SATA 2.5 Non-SED SSD	X		
180 GB SATA 2.5 Non-SED SSD	X		
120 GB SATA 2.5 Opal2 SED SSD	X		
180 GB SATA 2.5 Opal2 SED SSD	X		

Technical Specifications – Core vPro Processors

120 GB Opal SED	X	X	X
Intel Pro 1500 120gb SSD Opal 1 SED drive SRP	X		
120 GB SATA 2.5 2nd Opal1 SED SSD	X		
128 GB SSD Non-SED		X	X
128 GB Opal SED	X	X	X
128 GB Turbo Drive SSD (M.2 PCIe card)	X		X
128 GB SATA 2.5 2nd Opal2 SED SSD	X		
180 GB Opal SED	X	X	X
Intel Pro 1500 180gb SSD Opal 1 SED drive	X		
256 GB SED		X	X
256 GB Opal SED	X	X	X
256 GB SATA 2.5 SSD (Non-SED)	X		X
120GB SATA 2.5 Non-SED SSD (with 3.5" adapter when needed)	X	X	X
180GB SATA 2.5 Non-SED SSD (with 3.5" adapter when needed)	X	X	X
120GB SATA 2.5 Opal2 SED SSD (with 3.5" adapter when needed)	X	X	X
180GB SATA 2.5 Opal2 SED SSD (with 3.5" adapter when needed)	X	X	X
128GB SATA 2.5 SSD TLC Non-SED (with 3.5" adapter when needed)	X	X	X
256GB SATA 2.5 SSD TLC Non-SED (with 3.5" adapter when needed)	X	X	X
512GB SATA 2.5 SSD Non-SED (with 3.5" adapter when needed)	X	X	X

***NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.

Optical Disc Drives

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
Slim DVD-ROM		X	X
Slim BDXL Blu-ray Writer		X	X
Slim SuperMulti DVD Writer		X	X
HH Supermulti ODD			TWR only

Removable

HP Slim Removable SATA HDD Frame/Carrier		X	X
HP 3.5 Removable HDD Frame/Carrier			X

MEMORY

Form Factor	Type	Maximum	# of Slots
Desktop Mini	DDR3 non-ECC Up to 1600 MT/s	16 GB	2 SODIMM

Technical Specifications – Core vPro Processors

Ultra-slim Desktop	DDR3 non-ECC Up to 1600 MT/s	16 GB	2 SODIMM
Small Form Factor	DDR3 non-ECC Up to 1600 MT/s	32 GB	4 DIMM
Tower	DDR3 non-ECC Up to 1600 MT/s	32 GB	4 DIMM

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Memory modules support data transfer rates up to 1600 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

PERFORMANCE

Intel® Smart Response Technology Disk Cache Modules	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
2.5" Solid State Disk Cache			X
mSATA Solid State Disk Cache		X	

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
Intel I217LM Gigabit Network Connection (standard)	X	X	X
Intel Ethernet I210-T1 PCIe x1 Gb Network Interface Card (optional)			X
Wireless			
Intel 7260 802.11 ac PCIe x1 BT NIC	X		X (TWR)
HP WLAN 802.11 a/g/n 2x2 DualBand PCIe x1 Card (optional)			X
HP Wireless 802.11 a/b/g/n 2x2 Dual Band Mini Card with Bluetooth NIC (optional)		X	
Intel Centrino Advanced-N 6205 802.11 a/b/g/n PCI Express x1 Wireless Network Connection (optional)			X
Intel Centrino Advanced-N 6205 802.11 a/b/g/n PCI Express Mini Card Wireless Network Connection (optional)		X	
Intel 7260 802.11 a/b/g/n M.2 BT NIC Wireless Network Connection (optional)	X		
Intel Wireless-N 7260 802.11 M.2 a/b/g/n NIC Card Wireless Network Connection (optional)	X		
Intel Wireless-N 7260 802.11 a/b/g/n Mini PCIe NIC Card (USDT Only) Wireless Network Connection (optional)			
Intel Wireless-N 7260 802.11 a/b/g/n PCIe- Clink Card (SFF/TWR Only) Wireless Network Connection (optional)			

Technical Specifications – Core vPro Processors

NOTE: Either the integrated network connection or the Intel Centrino wireless NIC is required to support Intel vPro Technology features.

Audio/Multimedia

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HD audio with Realtek ALC221 codec (all ports are stereo)	X	X	X
DTS Studio Sound audio management technology	X	X	X
Microphone* and headphone front ports (3.5mm)	X	X	X
Line-out and Line-In rear Ports* (3.5mm)	Line out only	X	X
Multi-streaming capable*	X	X	X
Internal speaker (standard)	X	X	X

* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-out port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

KEYBOARDS AND POINTING DEVICES

Keyboard	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HP PS/2 Keyboard	X	X	X
HP USB Keyboard	X	X	X
USB Smart Card (CCID) Keyboard	X	X	X
HP USB and PS/2 Washable Keyboard	X	X	X
HP Wireless Keyboard and Mouse Combo*	X	X	X
HP USB Antimicrobial Keyboard	X	X	X

*Keyboard contains 25% post-consumer recycled plastic material.

Mice	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
HP PS/2 Mouse	X	X	X
HP USB Mouse	X	X	X
HP USB 1000dpi Laser Mouse	X	X	X
HP USB and PS/2 Washable Mouse	X	X	X
HP USB Antimicrobial Mouse	X	X	X

HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP EliteDesk 800 G1 Business PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.

Technical Specifications – Core vPro Processors

- Select models feature either Intel Standard Manageability or Intel Core vPro Processor Technology.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- UEFI specification 2.1
- Absolute Persistence agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Elite models use ACPI to provide power conservation features.

S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

SECURITY

	<u>USDT/DM</u>	<u>SFF/TWR</u>
Common Criteria Certified, Infineon TPM SLB9656TT1.2- 4.32 FW	X	X
SATA port disablement (via BIOS)	X	X
Drive lock	X	X
RAID configurations		X
Intel® Identify Protection Technology (IPT) ¹	X	X
Serial, parallel, USB enable/disable (via BIOS)	X	X
Optional USB Port Disable at factory (user configurable via BIOS)	X	X
Removable media write/boot control	X	X
Power-On password (via BIOS)	X	X
Setup password (via BIOS)	X	X
HP Chassis (1 bay) Security Kit		TWR only
Solenoid Hood Lock / Sensor	X	X
	USDT only	

Technical Specifications – Core vPro Processors

Support for chassis padlocks and cable lock devices

X

X

¹Models configured with Intel Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP Client Security module

ENVIRONMENTAL & REGULATORY

ENERGY STAR® qualified models available

EPEAT® registered where applicable/supported. See <http://www.epeat.net> for registration status by country.

Low halogen (chassis, all internal components and modules)

TAA compliant

PORTS

I/O Ports – Standard

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
USB 2.0	N/A	2 (front); 4 (rear)	2 (front); 4 (rear)
USB 3.0	2 (front); 4 (rear)	2 (front); 2 (rear)	2 (front); 2 (rear)
Serial (RS-232)	N/A	N/A	1
PS/2	N/A	1 keyboard (purple) 1 mouse (green)	1 keyboard (purple) 1 mouse (green)
Video	1 ea. VGA 2 ea. DisplayPort with multi-stream	1 ea. VGA 2 ea. DisplayPort with multi-stream	1 ea. VGA 2 ea. DisplayPort with multi-stream

NOTE: When configured with an Intel Celeron, Pentium or 4th generation Intel Core i3 CPU only two of the available video output ports are active

Audio	Front: headphone/mic Rear: line in/out 3.5mm diameter	Front: headphone/mic Rear: line in/out 3.5mm diameter	Front: headphone/mic Rear: line in/out 3.5mm diameter
Network Interface	RJ-45	RJ-45	RJ-45

I/O Ports – Optional

	<u>DM</u>	<u>USDT</u>	<u>SFF/TWR</u>
2nd Serial (RS-232)	N/A	N/A	1
Parallel	N/A	N/A	1

SLOTS

	<u>DM</u>	<u>USDT</u>	<u>SFF</u>	<u>TWR</u>
PCI Express Mini Card	N/A	1	N/A	N/A
MXM Graphics	N/A	1	N/A	N/A
mSATA	N/A	1	N/A	N/A

Technical Specifications – Core vPro Processors

Turbo Drive (M.2 PCIe)	1 ea. M.2 PCIe x4-2230 (for WLAN)	N/A	N/A	N/A
	1 ea. M.2 PCIe x4-2280 (for storage)			
PCI Express x1 (v2.0)	N/A	N/A	2 ea. 2.5" low profile 6.6" length 10W max. power	2 ea. 4.2" full height 6.6" length 10W max. power
PCI Express x16 (v2.0) (wired as a x4)	N/A	N/A	1 ea. 2.5" low profile 6.6" length 35W max. power	1 ea. 4.2" full height 6.6" length 35W max. power
PCI Express x16 (v3.0)	N/A	N/A	1 ea. 2.5" low profile 6.6" length 35W max. power	1 ea. 4.2" full height 6.6" length 75W max. power
Optional PCI (v2.3)	N/A	N/A	N/A	1 ea. 4.2" full height 6.6" length

NOTE: The TWR can support a single graphics card up to 75W. When configured with dual graphics cards support is limited to 35W for each.

BAYS

	<u>DM</u>	<u>USDT</u>	<u>SFF</u>	<u>TWR</u>
3.5" Media Card Reader	N/A	N/A	1 ea.	1 ea.
5.25" Half Height ODD	N/A	N/A	N/A	1 ea.
5.25" Slim ODD	N/A	1 ea.	1 ea.	1 ea.
Secure Digital (SD) Reader	N/A	1 ea.	N/A	N/A
2.5" internal storage drive	1 ea.	1 ea.	1 ea.	1 ea.
3.5" internal storage drive	N/A	N/A	1 ea.	2 ea.

SERVICE AND SUPPORT

On-site Warranty 1: Three-year (3-3-3) limited warranty delivers three years of on-site, next business day 2 service for parts and labor and includes free telephone support 3 24 x 7. Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing a Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: www.hp.com/go/cpc

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

Technical Specifications – Core vPro Processors

NOTE 3: Technical telephone support applies only to HP-configured and third-party HP qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

OPERATING SYSTEMS

Preinstalled

Windows 10 Pro 64*

Windows 10 Home 64*

Windows 8.1 Pro 64*

Windows 8.1 64*

Windows 7 Professional 64 (available through downgrade rights from Windows 10 Pro)**

Windows 7 Professional 32 (available through downgrade rights from Windows 10 Pro)**

Windows 7 Professional 64 (available through downgrade rights from Windows 8.1 Pro)***

Windows 7 Professional 32 (available through downgrade rights from Windows 8.1 Pro)***

Windows 7 Professional 64*

Windows 7 Professional 32*

Pre-installed (Other)

FreeDOS 2.0

Novell SUSE Linux Enterprise Desktop 11

Web-supported

Windows 10 Pro 64

Windows 10 Home 64

Windows 8.1 Pro 64

Windows 8.1 64

Windows 7 Professional 64 (available through downgrade rights from Windows 10 Pro)

Windows 7 Professional 32 (available through downgrade rights from Windows 10 Pro)

Windows 7 Professional 64 (available through downgrade rights from Windows 8.1 Pro)

Windows 7 Professional 32 (available through downgrade rights from Windows 8.1 Pro)

Windows 7 Professional 64

Windows 7 Professional 32

Windows 10 Enterprise 64

Windows 8.1 Enterprise 64

Windows 7 Enterprise 64

Windows 7 Enterprise 32

***NOTE:** Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.

**This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

Technical Specifications – Core vPro Processors

***This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS			
Included	Windows 7	Windows 8.1	Windows 10
BIOS	HP BIOSphere ¹ HP DriveLock HP BIOS Protection ³ BIOS Update via Network Master Boot Record Security Power On Authentication Pre-Boot Security Secure Erase ⁶ Absolute Persistence Module ⁷	HP BIOSphere ¹ HP DriveLock HP BIOS Protection ³ HP Disk Sanitizer ⁴ BIOS Update via Network Master Boot Record Security Power On Authentication Pre-Boot Security Secure Erase ⁶ Hybrid Boot Measured Boot Secure Boot Absolute Persistence Module ⁷	HP BIOSphere ¹ HP DriveLock HP BIOS Protection ³ BIOS Update via Network Master Boot Record Security Power On Authentication Pre-Boot Security Secure Erase ⁶ Hybrid Boot Measured Boot Secure Boot Absolute Persistence Module ⁷
Multimedia	CyberLink Power DVD, BD CyberLink Power2Go (Secure Burn) CyberLink YouCam BE	CyberLink Power DVD, BD CyberLink Power2Go (Secure Burn)	CyberLink Power DVD, BD CyberLink Power2Go (Secure Burn)

	Windows 7	Windows 8.1	Windows 10
Communication	Intel® Wireless Display (WiDi) Software for Windows ⁵ Native Miracast Support ⁸	Intel® Wireless Display (WiDi) Software for Windows ⁵ Native Miracast Support ⁸	Intel® Wireless Display (WiDi) Software for Windows ⁵ Native Miracast Support ⁸
HP Value Add	HP ePrint Driver ⁹ HP Recovery Manager HP Support Assistant HP Recovery Disk Creator	HP ePrint Driver ⁹ HP Recovery Manager HP Support Assistant HP Recovery Disk Creator	HP ePrint Driver ⁹ HP Recovery Manager HP Support Assistant Windows 10 Welcome App HP Recovery Disk Creator
3rd Party	Foxit PhantomPDF Express for HP	Foxit PhantomPDF Express for HP	Foxit PhantomPDF Express for HP
Microsoft Products	Buy Office Bing Search	Buy Office Bing Search	Buy Office Bing Search

Technical Specifications – Core vPro Processors

	Skype	Skype	Skype
Manageability	HP Drive Packs ¹⁰ HP SoftPaq Download Manager (SDM) HP System Software Manager (SSM) ¹⁰ HP Client Catalog ¹⁰ HP CIK for Microsoft SCCM ¹⁰ LANDESK Management ¹¹ HP BIOS Config Utility (BCU) ¹⁰	HP Drive Packs ¹⁰ HP SoftPaq Download Manager (SDM) HP System Software Manager (SSM) ¹⁰ HP Client Catalog ¹⁰ HP CIK for Microsoft SCCM ¹⁰ LANDESK Management ¹¹ HP BIOS Config Utility (BCU) ¹⁰	HP Drive Packs ¹⁰ HP SoftPaq Download Manager (SDM) HP System Software Manager (SSM) ¹⁰ HP Client Catalog ¹⁰ HP CIK for Microsoft SCCM ¹⁰ LANDESK Management ¹¹ HP BIOS Config Utility (BCU) ¹⁰ Discover HP Touchpoint Manager

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

	Windows 7	Windows 8.1	Windows 10
Security	Absolute Persistence Module ⁷ HP Device Access Manager HP Drive Encryption ¹² HP Disk Sanitizer External Edition HP Security Manager Microsoft Security Essentials ¹⁴	Absolute Persistence Module ⁷ HP Device Access Manager HP Drive Encryption ¹² HP Disk Sanitizer External Edition HP Security Manager Microsoft Defender	Absolute Persistence Module ⁷ HP Drive Encryption ¹² HP Disk Sanitizer External Edition HP Security Manager Microsoft Defender
Standard	Smart Card Reader Security lock slot Preboot Authentication	Smart Card Reader Security lock slot Preboot Authentication	Smart Card Reader Security lock slot Preboot Authentication

NOTE: The Absolute Persistence agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

Footnotes:

1 Available only on business PCs with HP BIOS.

3 May require a manual recovery step if all copies of BIOS are compromised or deleted

4 For the use cases outlined in the DOD 5220.22-M Supplement. Only supports traditional Hard Drives.

5 Integrated Intel® Wi-Di Display is available on select configurations only and requires a separate projector, TV or monitor with an integrated or external Wi-Di receiver. For more information on Intel® Wi-Di Display visit

<http://www.intel.com/go/wirelessdisplay>

6 For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.

7 Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit:

Technical Specifications – Core vPro Processors

<http://www.absolute.com/company/legal/agreements/> computrace-agreement. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

8 Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>

9 Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/eprintcenter>). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

10 Not preinstalled, however available on manageability website.

11 Subscription required.

12 Requires Windows. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

14 Opt in and internet connection required for updates.

CORE VPRO PROCESSORS

INTEL 4th GENERATION CORE vPRO PROCESSORS

All HP EliteDesk 800 G1 Business PC models featuring this technology include processors that are part of the Intel 2013 Stable Image Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP EliteDesk 800 G1 Business PC, thus making these models the most stable, secure, and manageable platforms available to enterprises today.

Intel® Advanced Management Technology (AMT) v9.0 – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 9.0 includes the following advanced management functions:

- Power Management (on, off, reset)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- SOL/IDER
- Cisco NAC/SDN Support
- ME Wake-on-LAN
- DASH 1.1 compliance
- IPv6 Support
- Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance - pre-schedule when the PC connects to the IT or service provider console for maintenance. Remote PCs can get required patches, be inventoried, etc by connecting to their IT console or Service Provider when it's convenient.
- Remote Alerts - automatically alert IT or service provider if issues arise
- Access Monitor - Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock

Technical Specifications – Core vPro Processors

- Microsoft NAP Support
- Host Base set-up and configuration
- Management Engine (ME) firmware roll back
- Wireless AMT functionality on Desktop (WoDT)
- Enhanced KVM resolution

Technical Specifications - Graphics

GRAPHICS

Intel HD Graphics		
VGA Controller	Integrated	
DisplayPort	Multimode capable; supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays (including the integrated panel)	
Bus Type	N/A	
RAMDAC	N/A	
Memory	<p>Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depends on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.</p> <p>Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.</p>	
Maximum Graphics Memory	Microsoft Windows 7	Windows 8.1
	Up to 1.7GB	Up to 1.8GB
	NOTE: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.	
Maximum Color Depth	32 bits/pixel	
Graphics/Video API Support	<p>4th Generation Core processors:</p> <ul style="list-style-type: none"> • The Processor Graphics contains a refresh of the seventh generation graphics core enabling substantial gains in performance and lower power consumption. Up to 16 EU support. • Next Generation Intel Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience <ul style="list-style-type: none"> ○ Encode/transcode HD content ○ Playback of high definition content including Blu-ray Disc ○ Superior image quality with sharper, more colorful images • DirectX Video Acceleration (DXVA) support for accelerating video processing <ul style="list-style-type: none"> ○ Full AVC/VC1/MPEG2 HW Decode • Advanced Scheduler 2.0, 1.0 • Windows 7, Windows 8, Linux OS Support • DirectX 11.1 • OpenGL 4.3 • Open CL 1.2 	

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rates
800x600	60 Hz
1024x768	60 Hz
1152x864	60 Hz
1280x600	60 Hz
1280x720	60 Hz
1280x800	60 Hz
1280x960	60 Hz
1280x1024	60 Hz
1360x768	60 Hz
1366x768	60 Hz
1400x1050	60 Hz
1440x900	60 Hz
1600x900	60 Hz
1600x1200*	60 Hz
1680x1050	60 Hz
1920x1080	60 Hz
1920x1200*	60 Hz
1920x1440*	60 Hz
2560x1440*	60 Hz
2560x1600*	60 Hz
3840x2160*	60 Hz

* Only supported on displays connected to the external DisplayPort connector.

AMD Radeon HD 7650A Graphics Card

Form Factor	MXM 3.0
Graphics Controller	AMD Radeon HD 7650A
Core Clock	600MHz
Memory Clock	800MHz
Memory	2GB, DDR3, 128-bit wide
Bus Type	MXM
Max. Power	35W
Power Source Support	12V and 19V
3D API Support	DX11, SMS

Technical Specifications - Graphics

HDCP Support	Yes
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536
Supported Graphics APIs	DX11, OpenGL, full 1080p BD (H264) playback in hardware, Multi-Stream DisplayPort support

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rates
800 x 600	60 Hz
1024 x 768	60 Hz
1280 x 720	60 Hz
1280 x 768	60 Hz
1280 x 1024	60 Hz
1360 x 768	60 Hz
1440 x 900	60 Hz
1600 x 900	60 Hz
1680 x 1050	60 Hz
1920 x 1080	60 Hz

NVIDIA NVS 310 Graphics Card

Introduction	<p>The NVIDIA® NVS™ 310 Graphics Card is a PCI Express low profile form factor graphics add-in card targeted as an active low cost graphics solution for the corporate business and enterprise markets.</p> <p>The NVIDIA® NVS 310 graphics card is an ideal solution for customers requiring a small form factor graphics add-in card for either standard or small form factor PC designs.</p>
Performance and Features	<p>The NVIDIA® NVS 310 Graphics Card offers 512 MB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.</p> <p>DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.</p> <p>For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.</p>
Form Factor	Low Profile: 2.713 × 6.15 in
Graphics Controller	NVIDIA® NVS 310

Technical Specifications - Graphics

Memory Clock	875MHz		
Memory Size	512 MB DDR3		
Memory Bandwidth	14 GB/s		
Max. Power	19.5W		
Display Max. Resolution	Up to 2560 x 1600 (digital display) per display		
Display Output	Up to 2 displays in the following configurations		
	DisplayPort output:	<ul style="list-style-type: none"> • Drives two DisplayPort enabled digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card • Supports 2 monitors up to resolution of 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort Multi-Stream topology technology. 	
	DVI-D output:	<ul style="list-style-type: none"> • Drives two digital display at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors • Drives two digital display at resolutions up to 2560x 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors 	
	HDMI output:	<ul style="list-style-type: none"> • NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 x 1080P at 60 Hz using DisplayPort to HDMI cable adaptors 	
	VGA display output:	<ul style="list-style-type: none"> • Drives two analog display at resolutions up to 1920 x 1200 at 60 Hz using DisplayPort to VGA cable adaptors 	

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz) by Connection			
	DisplayPort to VGA	DisplayPort to DVI-D	DisplayPort to HDMI	DisplayPort
640 x 480	85	60	60	60
800 x 600	85	60	60	60
1024 x 768	85	60	60	60
1280 x 720	85	60	60	60
1280 x 1024	85	60	60	60
1440 x 900	75	60	60	60
1600 x 1200	60	60	60	60

Technical Specifications - Graphics

1680 x 1050	60	60	60	60
1920 x 1080	60-R	60-R	60	60
1920 x 1200	60-R	60-R		60
1920 x 1440				60
2048 x 1536				60
2560 x 1600				60

NVIDIA GeForce GT630 Graphics Card

<p>Introduction</p>	<p>The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Card Graphics Card provides a full height, PCI Express x16 graphics add-in card solution based on the NVIDIA Kepler Architecture GPU. The card is designed to support three display connections through its DVII, and two DisplayPort connectors.</p> <p>An ideal solution for desktop PC customers seeking enhanced 2D and advanced 3D graphics performance, the NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards are an excellent choice for business users who want run multiple displays from a single graphics board. Engage in Web conferencing or video or photo editing, while improving your everyday business PC experience with better graphics and excellent visual display quality.</p>
<p>Performance and Features</p>	<p>The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards deliver superior PCI Express (PCIe) Gen 3 features including:</p> <ul style="list-style-type: none"> • Unprecedented flexibility for new applications and enhanced performance • Support for NVIDIA surround technology • Run multiple displays from a single graphics card • Full 16 lane PCIe Generation 3 bus support with peak bandwidth support • Wireless Display ready for future support
<p>Form Factor</p>	<p>PCIe x16 Card</p>
<p>Graphics Controller</p>	<p>NVIDIA Kepler Architecture GPU</p>
<p>Core Clock</p>	<p>875 MHz</p>
<p>Memory Clock</p>	<p>891 MHz</p>
<p>Memory Size</p>	<p>2 GB DDR3 128 bit</p>
<p>Memory Bandwidth</p>	<p>28.5 GB/s</p>
<p>Display Max. Resolution</p>	<p>2560 x 1600 digital, 2048 x 1536 analog</p>

Technical Specifications - Graphics

Display Support	Integrated 400 MHz RAMDAC	
Supported Display Resolutions and Refresh Rates		
NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP		
Resolution	Maximum Refresh Rates (Hz)	
	Analog Connection	Digital Connection
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60
2048 x 1536	75	60
2560 x 1600	N/A	60

NVIDIA NVS 315 1GB PCIe x 16 Graphics Card

Introduction	Get efficient dual-display graphics performance in a PCI Express low-profile graphics card with the NVIDIA NVS 315 PCIe x16 1 GB Graphics Card, an ideal desktop graphics solution for professional business and commercial applications.
Performance and Features	<p>The NVIDIA® NVS 315 Graphics Card offers 1 GB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.</p> <p>DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.</p> <p>For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.</p>
Form Factor	Low Profile: 2.713 × 6.15 in
Graphics Controller	NVIDIA® NVS 315
Memory Clock	875MHz
Memory Size	512 MB DDR3
Memory Bandwidth	14 GB/s

Technical Specifications - Graphics

Connectors	DMS-59 , with support for dual VGA, dual DVI or dual Display Port with the appropriate adapter cable	
Display Max. Resolution	Up to 2048 x 1536 VGA; 1920 x 1200 DVI; 2560 x 1600 DisplayPort	
Display Output	Up to 2 displays in the following configurations	
	<ul style="list-style-type: none"> • Dual DVI : <ul style="list-style-type: none"> ○ Drives two DVI displays using optional HP DMS59 DVI Dual-head Connector Cable DL139A • Dual DisplayPort : <ul style="list-style-type: none"> ○ Drives two DisplayPort using optional HP DMS-59 to Dual DisplayPort kit XP688AA • Dual VGA : <ul style="list-style-type: none"> ○ Drives two analog using the included HP DMS-59 to Dual VGA Cable 	
Supported Display Resolutions and Refresh Rates		
NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP		
Resolution	Maximum Refresh Rates (Hz) by Connection	
	Analog Connection	Digital Connection
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	60*
2560 x 1600	N/A	60*
		* Display Port Only

Technical Specifications - Graphics

AMD Radeon R7 240 2GB PCIe x16	
Memory	2048MB DDR3 128-bit wide frame buffer running at 1800MHz.
Controller Clock Speed	AMD R14D-M2-70 GPU engine running at 730 MHz.
Multidisplay Support	Yes (2)
Graphics /API support	Supports Microsoft DirectX 11.1, OpenGL 4.3 and OpenCL 1.2 APIs. DX 11.1, Shader Model 5, UVD 4.2, VCE 2.0, OpenGL 4.2 (4.1+), OpenCL 1.2, and DirectCompute 11
Output Connectors	1 x of each DVI-I (VGA via dongle output), and HDMI connectors.

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	VGA	DVI-D	HDMI
640x480	85	60	60
720x480	85	60	60
720x576	85	60	60
800x600	85	60	60
1024x768	85	60	60
1280x720	85	60	60
1280x768	85	60	60
1280x1024	85	60	60
1440x900	85	60	60
1600x1024	85	60	60
1600x1200	85	60	60
1680x1050	75	60	60
1920x1080	85	60*	60
1920x1200	85	60*	NA
1920x1440	85	NA	NA
2048x1536	75	NA	NA
2560x1440	NA	NA	NA
2560x1600	NA	NA	NA
* Requires display with support for reduced blanking timing			

AMD Radeon R9 255 2GB PCIe x16	
Memory	2GB 128-bit wide frame buffer operating at 1150MHz.
Controller Clock Speed	AMD Cape Verde GPU engine operating at 900 MHz.
Multidisplay Support	Yes (2)
Graphics /API support	Supports Microsoft DirectX 11.1, OpenGL 4.3 and OpenCL 1.2 APIs. DX 11.1, Shader Model 5, UVD 4.2, VCE 2.0, OpenGL 4.2 (4.1+), OpenCL 1.2, and DirectCompute 11

Technical Specifications - Graphics

Output Connectors	1 x of each Dual-Link DVI-I, DisplayPort 1.2 and HDMI 1.4 output connectors. DisplayPort and HDMI outputs support audio 1 VGA and 1 DisplayPort1.2
--------------------------	--

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

SUPPORTED DVI-D (DIGITAL) AND DISPLAYPORT DISPLAY MODES Resolution	Depth (BPP)	Refresh Rate (Hz)
320x200	8, 16, 32	60
320x240	8, 16, 32	60
400x300	8, 16, 32	60
480x360	8, 16, 32	60
512x384	8, 16, 32	60
640x350	8, 16, 32	60
640x400	8, 16, 32	60
640x480	8, 16, 32	60
720x480	8, 16, 32	60
720x576	8, 16, 32	60
800x600	8, 16, 32	60
1024x768	8, 16, 32	60
1152x864	8, 16, 32	60
1280x720	8, 16, 32	60
0.98M9 (1280x768)	8, 16, 32	60
1280x960	8, 16, 32	60
1280x1024	8, 16, 32	60
1.30MA (1440x900)	8, 16, 32	60, 75
1600x900	8, 16, 32	60
1.64MA (1600x1024)	8, 16, 32	60
1600x1200	8, 16, 32	60
1.76MA (1680x1050)	8, 16, 32	60
1.76MA-R (1680x1050)	8, 16, 32	75-R
2.07M9-R (1920x1080)	8, 16, 32	60-R
2.30MA-R (1920x1200)	8, 16, 32	60-R
2560x1440	8, 16, 32	60
2560x1600	8, 16, 32	60

VGA AND DVI-A (ANALOG) DISPLAY MODES

Resolution	Depth (bpp)	CRT Refresh Rate (Hz)
320x200	8, 16, 32	60, 75, 85
320x240	8, 16, 32	60, 75, 85
400x300	8, 16, 32	60, 75, 85
480x360	8, 16, 32	60, 75, 85
512x384	8, 16, 32	60, 75, 85
640x350	8, 16, 32	60, 75, 85
640x400	8, 16, 32	60, 75, 85
640x480	8, 16, 32	60, 75, 85

Technical Specifications - Graphics

720x480	8, 16, 32	60, 75, 85
720x576	8, 16, 32	50, 60, 75, 85
800x600	8, 16, 32	60, 75, 85
1024x768	8, 16, 32	60, 75, 85
1152x864	8, 16, 32	60, 75, 85
1280x720	8, 16, 32	60, 75, 85
0.98M9 (1280x768)	8, 16, 32	60, 75, 85
1280x960	8, 16, 32	60, 75, 85
1280x1024	8, 16, 32	60, 75, 85
1.30MA (1440x900)	8, 16, 32	60, 75
1600x900	8, 16, 32	60, 75, 85
1.64MA (1600x1024)	8, 16, 32	60, 75, 85
1600x1200	8, 16, 32	60, 75, 85
1.76MA (1680x1050)	8, 16, 32	60, 75
1920x1080	8, 16, 32	60, 75, 85
2.30MA (1920x1200)	8, 16, 32	60, 75, 85
1920x1440	8, 16, 32	60, 75, 85
2048x1536	8, 16, 32	60, 75

AMD Radeon HD 8350 1GB PCIe x16 DH Graphics Card

Introduction	Get stable 2D and advanced 3D graphics performance from the AMD Radeon HD 8350 1 GB PCIe x16 DH Graphics Card, a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8350 GPU, great for Web conferencing or video and photo editing.
Form Factor	PCIe x16
Graphics Controller	AMD Radeon HD 8350
Core Clock	GPU engine operates at 523 MHz
Memory	1GB, DDR3, SDRAM
Memory Clock	875 MHz
HDCP Support	Yes
Display Max. Resolution	Digital 1920 x 1200 Analog 2048 x 1536

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

	Analog Connection	Digital Connection
640 x 480	85	60

Technical Specifications - Graphics

720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	75
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	75-R
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	N/A
2560 x 1600	N/A	N/A

AMD Radeon HD 8490 1GB PCIe x16 Graphics Card

Introduction	Get impressive graphics and high resolution dual-display performance in a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8490 Graphics Processor. Improve your everyday PC, Web conferencing, and video or photo editing.
Form Factor	PCIe x16
Graphics Controller	AMD Radeon HD 8490
Core Clock	GPU engine operates at 875 MHz
Memory	1GB, DDR3, SDRAM
Memory Clock	900 MHz
HDCP Support	Yes
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Technical Specifications - Graphics

	Analog Connection	Digital Connection
300 x 200	85	60
320 x 240	85	60
400 x 300	85	60
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	75
1600 x 900	85	60
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	75-R
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	60
2560 x 1600	N/A	60

Technical Specifications – Hard Disk and Solid State Storage

HARD DISK AND SOLID STATE STORAGE

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP EliteDesk 800 G1 Series Business PC supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self-Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

NOTE: GB = 1 billion bytes. Actual available capacity is less.

Technical Specifications – Hard Disk and Solid State Storage

Redundant Array of Independent Drives (RAID)

Flexible implementation:

- DriveLock is supported while in RAID mode. Users can manage the DriveLock password from within F10 Setup. Locked drives will be displayed as such in the RAID option ROM interface.
- Hard drive information can be viewed within F10 Setup while in RAID mode. Previously, the hard drives will not appear in Drive Configuration when switching to RAID mode.
- DPS Self-Test can be executed on physical hard drives while in RAID mode.
- The RAID Setup Utility (accessed through CTRL-I) can be protected by the F10 Setup password.

NOTE:

RAID 1 is the only RAID configuration offered via factory configurations. The pre-configured systems:

- Are only available on the SFF and TWR form factors. The USDT and DM form factors do not support RAID as they do not allow for multiple common storage drives.
- Are complete RAID systems and have both drives installed. If the TWR is configured with three hard disk drives, the third drive is would be un-partitioned and not part of the RAID array
- Have the necessary Option ROM configuration.
- Are pre-loaded and pre-installed with all required Intel software.
- Include a preinstalled operating system that is mirrored mode out of the box.

HP 256 GB* (non-SED) TLC Solid State Drive

Unformatted Capacity	256 GB*	
Architecture	Triple Level Cell (TLC) NAND	
Interface	SATA 6 GB/sec	
Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)	
Weight	0.1 lb (45 g)	
Bandwidth Performance	Sustained Sequential Read:	Up to 510 MB/s
	Sustained Sequential Write:	Up to 280 MB/s
	Random Read (4KB):	up to 90K IOPs
	Random Write (4KB):	up to 70K IOPs
Latency	Read:	55ms (TYP)
	Write:	55ms (TYP)

Technical Specifications – Hard Disk and Solid State Storage

Power	DC power requirement:	Min 4.75 V; Max 5.25 V
	Total power consumption:	160 mW (Active) ; <85 mW; (Idle)
Useful Drive Life	1.2 million device hours**	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity (operating):	5% to 95%
	Shock:	1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark	
<p>* For solid state disk drives, GB means 1 billion bytes. Actual formatted capacity is less. Up to 16GB for Windows 7 and up to 36GB for Windows 8.1 is reserved for system recovery software.** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.</p>		

HP 128 GB* (non-SED) TLC Solid State Drive

Unformatted Capacity	128 GB*	
Architecture	Triple Level Cell (TLC) NAND	
Interface	SATA 6 GB/sec	
Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)	
Weight	0.1 lb (45 g)	
Bandwidth Performance	Sustained Sequential Read:	Up to 510 MB/ss
	Sustained Sequential Write:	Up to 140 MB/s
	Random Read (4KB):	up to 90K IOPs
	Random Write (4KB):	up to 36K IOPs
Latency	Read:	55ms (TYP)
	Write:	55ms (TYP)
Power	DC power requirement:	Min 4.75 V; Max 5.25 V
	Total power consumption:	160 mW (Active) ; <85 mW; (Idle)
Useful Drive Life	1.2 million device hours**	

Technical Specifications – Hard Disk and Solid State Storage

Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity (operating):	5% to 95%
	Shock:	1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark	
<p>* For solid state disk drives, GB means 1 billion bytes. Actual formatted capacity is less. Up to 16GB for Windows 7 and up to 36GB for Windows 8.1 is reserved for system recovery software.** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.</p>		

HP 512 GB* (non-SED) TLC Solid State Drive		
Unformatted Capacity	512 GB*	
Architecture	Triple Level Cell (TLC) NAND	
Interface	SATA 6 GB/sec	
Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)	
Weight	54 g	
Bandwidth Performance	Sustained Sequential Read:	Up to 510 MB/ss
	Sustained Sequential Write:	Up to 455 MB/s
	Random Read (4KB):	up to 90K IOPs
	Random Write (4KB):	up to 60K IOPs
Latency	Read:	55ms (TYP)
	Write:	55ms (TYP)
Power	DC power requirement:	Min 4.75 V; Max 5.25 V
	Total power consumption:	250 mW (Active) ; <50 mW; (Idle)
Useful Drive Life	1.2 million device hours**	
	Operating Temperature:	32° to 158° F (0° to 70° C)

Technical Specifications – Hard Disk and Solid State Storage

Environmental (all conditions, non-condensing)	Relative Humidity (operating):	5% to 95%
	Shock:	1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark	

HP Turbo Drive 128 GB PCIe SSD	
Capacity	128 GB SSD*
NAND Type	MLC
Read Bandwidth (128KB)	1.00 GB/s
Write Bandwidth (1MB)	450 MB/s
Random Read IOPS (4KB)	110K
Random Write IOPS (4KB)	40K
Endurance (Total Bytes Written)	73 TB
Weight	1.8oz (51g)
Form Factor	Half-height, half-length**
Endurance (Total Bytes Written)	73 TB

*For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1) of system disk is reserved for the system recovery software.

**Roughly, actual length is 4 inches (100cm)

HP 1TB 10K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	
Unformatted Capacity	1 TB
Rotational Speed	10,000 rpm
Interface	Serial ATA (6.0 Gb/s)

Technical Specifications – Hard Disk and Solid State Storage

Synchronous Transfer Rate (Maximum)	Up to 600 MB/s	
Buffer Size	64 MB	
Cache	Adaptive	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	1.2 ms
	Average:	3.6 ms
	Full-Stroke:	9.0 ms
Height (nominal)	0.6 in/1.53 mm	
Width (nominal)	Media diameter: 2.5 in/63.6 mm	
	Physical size: 2.75 in/69.9 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications – Hard Disk and Solid State Storage

HP 500 GB 10K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive		
Unformatted Capacity	500 GB	
Rotational Speed	10,000 rpm	
Interface	Serial ATA (6.0 Gb/s)	
Synchronous Transfer Rate (Maximum)	Up to 600 MB/s	
Buffer Size	64 MB	
Cache	Adaptive	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	1.2 ms
	Average:	3.6 ms
	Full-Stroke:	9.0 ms
Height (nominal)	0.6 in/1.53 mm	
Width (nominal)	Media diameter: 2.5 in/63.6 mm	
	Physical size: 2.75 in/69.9 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 320-GB 7.2K SATA 6.0Gb/s 2.5” Hard Disk Drive		
Capacity	320,072,933,376 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 2.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	488,397,168	
	Single Track:	2.0 ms
	Average:	12 ms

Technical Specifications – Hard Disk and Solid State Storage

Seek Time (typical reads, includes controller overhead, including settling)	Full-Stroke:	22 ms
Height (nominal)	0.374 in/9.5 mm	
Width (nominal)	Media diameter: 2.5 in/63.5 mm	
	Physical size: 2.75 in/70 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 500-GB 7200 RPM SATA 2.5" Self-Encrypting (SED) Hard Disk Drive		
Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Drive Type	Self-Encrypting Drive (SED) with SATA interface	
Interface	SATA 6 Gb/s	
Segmented Buffer with write cache	32768 KB - A portion of buffer capacity used for firmware	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	1.0 ms
	Average:	13 ms
	Full-Stroke:	25 ms
Media Diameter	2.5 in/63.5 mm	
Height	0.267 in/6.8 mm, ±0.2mm	
Width	2.75 in/69.85 mm, ±0.25mm	
Length	3.945 in/100.2 mm, ±0.25mm	
Weight	3.35 oz/95 g (max)	
Operating Temperature	32° to 140° F (0° to 60° C)	

Technical Specifications – Hard Disk and Solid State Storage

HP 500-GB 7.2K SATA 6.0Gb/s 2.5” Hard Disk Drive		
Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 2.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	12 ms
	Full-Stroke:	25 ms
Height (nominal)	0.374 in/9.5 mm	
Width (nominal)	Media diameter: 2.5 in/63.5 mm	
	Physical size: 2.75 in/70 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 1-TB SATA 6G 2.5” 8GB Solid State Hybrid Drive (SSHD)		
Formatted Capacity	1 TB	
Spindle Speed	5,400 rpm +/- 0.2%	
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
Interface	Serial ATA (SATA)	
Cache Buffer	64 MB	
NAND Flash Commercial Multilevel Cell (cMLC)	8 GB	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	2.0 ms

Technical Specifications – Hard Disk and Solid State Storage

	Average:	12 ms
Height	0.374 +/- .008 in (9.5 +/- 0.2 mm)	
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	
Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)	
Weight	0.254 lb/115 g (max)	
Operating Temperature	32° to 140° F (0° to 60° C)	

Technical Specifications – Hard Disk and Solid State Storage

HP 500 GB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD)		
Formatted Capacity	500 GB	
Spindle Speed	5,400 rpm +/- 0.2%	
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
Interface	Serial ATA (SATA)	
Cache Buffer	64 MB	
NAND Flash Commercial Multilevel Cell (cMLC)	8 GB	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	2.0 ms
	Average:	12 ms
Height	0.268 +/- .008 in (6.8 +/- 0.2 mm)	
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	
Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)	
Weight	0.209 lb/95 g (max)	
Operating Temperature	32° to 140° F (0° to 60° C)	

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		
Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
	Single Track:	2.0 ms
	Average:	11 ms

Technical Specifications – Hard Disk and Solid State Storage

Seek Time (typical reads, includes controller overhead, including settling)	Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm
	Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 120 GB Solid State Drive		
Unformatted Capacity	120 GB	
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller	
Interface	Serial ATA 2.0 (3.0 Gb/s)	
Dimensions (W x H x D)	2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm)	
Weight	0.18 lb (80 g)	
Bandwidth Performance	Sustained Sequential Read:	Up to 250 MB/s
	Sustained Sequential Write:	Up to 70 MB/s
	Random Read:	Up to 35K IOPs
	Random Write:	Up to 6.6K IOPs
Latency	Read:	65-ms
	Write:	85-ms
Power	DC power requirement:	5 VDC 5%-100 mV ripple p-p
	Total power consumption:	0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Maximum Wet Bulb Temperature (operating):	84° F (29° C)

Technical Specifications – Hard Disk and Solid State Storage

	Shock:	1,500 G/0.5-ms
<p>* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content</p> <p>** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.</p>		

HP 128 GB Solid State Drive		
Unformatted Capacity	128 GB*	
Architecture	Multi Level Cell (MLC) NAND	
Interface	SATA 6 GB/sec	
Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)	
Weight	0.16 lb (73 g)	
Bandwidth Performance	Sustained Sequential Read:	Up to 450 MB/ss
	Sustained Sequential Write:	Up to 260 MB/s
	Random Read (4KB):	up to 46K IOPs
	Random Write (4KB):	up to 56K IOPs
Latency	Read:	55ms (TYP)
	Write:	55ms (TYP)
Power	DC power requirement:	Min 4.5 V; Max 5.5 V
	Total power consumption:	160 mW (Active) ; <85 mW; (Idle)
Useful Drive Life	1.2 million device hours**	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity (operating):	5% to 95%
	Shock:	1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark	
<p>* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content</p> <p>** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.</p>		

Technical Specifications – Hard Disk and Solid State Storage

HP 256 GB SATA 2.5” Self-Encrypting (SED) Solid State Drive		
Unformatted Capacity	256,186,209,271 bytes	
Architecture	Self-Encrypting (SED) Solid State Drive with 25nm MLC NAND Flash and SATA interface	
Interface	Serial ATA 2.0 (3.0 Gb/s)	
NAND Flash	25nm MLC NAND Flash	
Height	.275 in/7mm	
Width	2.75 in/69.85 mm	
Length	3.95 in/100.5 mm	
Weight	0.161 lb (73 g)	
Bandwidth Performance	Sustained Sequential 128k Read:	Up to 450 MB/s
	Sustained Sequential 128k Write:	Up to 260 MB/s
	Random 4k Read:	Up to 46K IOPs
	Random 4k Write:	Up to 56K IOPs
Latency	Read:	55 µs
	Write:	55 µs
Power	SATA power consumption:	160 mW (active average); <85 mW (idle average)
Useful Drive Life	72TB written, up to 40GB/day for 5 years	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/1 ms

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive	
Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm

Technical Specifications – Hard Disk and Solid State Storage

Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		
Capacity	1,000,204,886,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	1,953,525,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications – Hard Disk and Solid State Storage

HP 2-TB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive		
Unformatted Capacity	2 TB	
Rotational Speed	7,200 rpm	
Interface	SATA 6Gb/s NCQ	
Cache, Multisegmented (MB)	64 MB	
Seek Time (average)	Read	<8.5 ms
	Write	<9.5 ms
Height	1.028 in/26.11 mm	
Width	4.0 in/101.6 mm	
Depth	5.787 in/146.99 mm	
Weight	1.38 lb/626 g	
Operating Temperature	32° to 140° F (0° to 60° C)	

Technical Specifications – Memory

MEMORY

HP Slim SuperMulti DVD Writer Drive		
Height	12.7mm height	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard	
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel	
Weight (max)	0.42 lb (190 g)	
Write speeds	DVD-RAM	Up to 5X
	DVD-R DL	Up to 6X
	DVD+R	Up to 8X
	DVD+RW	Up to 8X
	DVD+R DL	Up to 6X
	DVD-R	Up to 8X
	DVD-RW	Up to 6X
	CD-R	Up to 24X
	CD-RW	Up to 24X
Read speeds	DVD-RAM	Up to 5X
	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 8X
	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
Access time (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
	Stop Time	6 seconds (typical)
Power	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum)

Technical Specifications – Memory

Environmental conditions (operating - non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)

HP Slim Blu-ray BDXL Drive

Height	12.7mm height		
Orientation	Either horizontal or vertical		
Interface type	SATA/ATAPI		
Disc recording capacity	Up to 128 GB QL, 100 GB TL, 50 GB DL or 25 GB standard SL		
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel		
Weight (max)	Up to 0.37 lb (170 g) without bezel		
Write speeds		Triple-layer	Quadruple-layer
	BD-R	Up to 4X	Up to 4X
	BD-RE	Up to 2X	Not supported
		Single-layer	Double-layer
	BD-R	Up to 6X	Up to 6X
	BD-RE	Up to 2X	Up to 2X
	DVD-R	Up to 8X	Up to 6X
	DVD-RW	Up to 6X	Not supported
	DVD+R	Up to 8X	Up to 6X
	DVD+RW	Up to 8X	Not supported
	DVD-RAM	Up to 5X	
	CD-R	Up to 24X	
	CD-RW	Up to 24X	
		Triple-layer	Quadruple-layer
	BD-R	Up to 4X	Up to 4X
	BD-RE	Up to 4X	Not supported
		Single-layer	Double-layer
	BD-ROM	Up to 6X	Up to 6X
	BD-R	Up to 6X	Up to 6X

Technical Specifications – Memory

Read speeds	BD-RE	Up to 6X	Up to 6X
	DVD-ROM	Up to 8X	Up to 8X
	DVD-R	Up to 8X	Up to 8X
	DVD-RW	Up to 8X	
	DVD+R	Up to 8X	Up to 8X
	DVD+RW	Up to 8X	
	BDMV (AACs Compliant Disc)	Up to 6X/2X (Read/Play)	
	DVD-RAM	Up to 5X	
	DVD-Video (CSS Compliant Disc)	Up to 8X/4X (Read/Play)	
	CD-R/RW/ROM	Up to 24X	
	CD-DA(DAE)	Up to 20X/10X (Read/Play)	
Access time (typical reads, including settling)	Random	BD-ROM: 205 ms (typical), DVD-ROM: 185 ms (typical), CD-ROM: 165 ms (typical)	
	Full Stroke	BD-ROM: 350 ms (typical), DVD-ROM: 345 ms (typical), CD-ROM: 340 ms (typical)	
Power	Source	Slimline SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p	
	DC Current	5 VDC -1200 mA typical, 2000 mA maximum	
Environmental conditions (operating - non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Relative Humidity	10% to 80%	
	Maximum Wet Bulb Temperature	84° F (29° C)	

HP Slim DVD-ROM Drive		
Height	12.7mm	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel	
Weight (max)	Up to 0.37 lb (170 g) without bezel	
Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X
	DVD-ROM	Up to 8X

Technical Specifications – Memory

	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
Access time (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
Power	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature (operating)	84° F (29° C)

System Memory Support

The HP EliteDesk 800 G1 Business PC supports the 4th generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the 4th generation Intel® Core™ processor includes an Integrated Memory Controller (IMC). The IMC supports DDR3/DDR3L protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR3/DDR3L unbuffered dual in-line memory modules (UDIMM) or DDR3/DDR3L unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- Memory data transfer rates of up to 1600 MT/s; actual supported data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR3/DDR3L system memory I/O voltage of 1.5V
- Theoretical maximum memory bandwidth of:
 - 21.3 GB/s in dual-channel mode assuming 1333 MT/s
 - 25.6 GB/s in dual-channel mode assuming 1600 MT/s

Platform Memory Support

- The Small Form Factor (SFF) and Tower (TWR) platforms support up to four (4) industry-standard DDR3-SDRAM DIMMs.
- The Ultra-slim Desktop (USDT) and Desktop Mini (DM) support up to two (2) industry-standard DDR3-SDRAM SO-DIMMs.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

Technical Specifications – Memory

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Technical Specifications – Networking and Communications

NETWORKING AND COMMUNICATIONS

HP WLAN 802.11 a/b/g/n 2x2 Dual Band PCIe x1 WLAN/Bluetooth Card		
Wireless LAN Standards	IEEE 802.11a/b/g/n	
Interoperability	Wi-Fi certification	
	BQE certification of the Bluetooth component	
	CCXv1, v2, v3, v4, v5 CCX certified (Cisco Client Extensions)	
	<p>NOTE: WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</p>	
Frequency Band	802.11b/g/n	2.402-2.482 GHz
	802.11a/n	4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz
Antenna Structure	2 transmit; 2 receive (2x2) Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications.	
Data Rates	<ul style="list-style-type: none"> 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: card will support rates for NSS=1 and NSS=2 for RX and TX for 20 and 40 MHz channels. Short and long guard interval shall be supported. 	
Security	<ul style="list-style-type: none"> IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through V5 WAPI 	
	<p>NOTE: Check latest software/driver release for updates on supported security features.</p>	
Roaming	IEEE 802.11 compliant roaming between band Access Points	
Output Power	<ul style="list-style-type: none"> +13.5 dBm minimum Maximum output power must be able to achieve modular regulatory certification peak gain of +3dBi at 2.4GHz and +5dBi at 5GHz 	

Technical Specifications – Networking and Communications

	NOTE: Maximum output power may vary by country according to local regulations.																											
Power Consumption	Transmit: 2.0 Watts																											
	Receive: 1.6 Watts																											
	Idle mode: 250 mW (WLAN associated)																											
	Idle mode: 100 mW (WLAN unassociated)																											
	Radio off: 75 mW (WLAN unassociated)																											
Bluetooth Power Consumption	Peak operating: 330 mW																											
	Receive: 230 mW																											
	USB selective suspend: 17 mW																											
Power Management	ACPI and PCI Express bus compliant power management 802.11 compliant power saving mode Supports USB selective suspend and resume of the Bluetooth component through the USB control signals.																											
Receiver Sensitivity	802.11b																											
		<table border="1"> <thead> <tr> <th>Sensitivity (dBm)</th> <th>Rate (Mbps)</th> <th>Modulation and Coding Rate</th> </tr> </thead> <tbody> <tr> <td>-95</td> <td>1</td> <td>BPSK</td> </tr> <tr> <td>-93</td> <td>2</td> <td>QPSK</td> </tr> <tr> <td>-91</td> <td>5.5</td> <td>CCK</td> </tr> <tr> <td>-88</td> <td>11</td> <td>CCK</td> </tr> </tbody> </table>	Sensitivity (dBm)	Rate (Mbps)	Modulation and Coding Rate	-95	1	BPSK	-93	2	QPSK	-91	5.5	CCK	-88	11	CCK											
Sensitivity (dBm)	Rate (Mbps)	Modulation and Coding Rate																										
-95	1	BPSK																										
-93	2	QPSK																										
-91	5.5	CCK																										
-88	11	CCK																										
	802.11a/g																											
		<table border="1"> <thead> <tr> <th>Sensitivity (dBm)</th> <th>Rate (Mbps)</th> <th>Modulation and Coding Rate</th> </tr> </thead> <tbody> <tr> <td>-90</td> <td>6</td> <td>BPSK - 1/2</td> </tr> <tr> <td>-89</td> <td>9</td> <td>BPSK - 3/4</td> </tr> <tr> <td>-87</td> <td>12</td> <td>QPSK - 1/2</td> </tr> <tr> <td>-85</td> <td>18</td> <td>QPSK - 3/4</td> </tr> <tr> <td>-82</td> <td>24</td> <td>16 QAM - 1/2</td> </tr> <tr> <td>-79</td> <td>36</td> <td>16 QAM - 3/4</td> </tr> <tr> <td>-76</td> <td>48</td> <td>64 QAM - 2/3</td> </tr> <tr> <td>-74</td> <td>54</td> <td>64 QAM - 3/4</td> </tr> </tbody> </table>	Sensitivity (dBm)	Rate (Mbps)	Modulation and Coding Rate	-90	6	BPSK - 1/2	-89	9	BPSK - 3/4	-87	12	QPSK - 1/2	-85	18	QPSK - 3/4	-82	24	16 QAM - 1/2	-79	36	16 QAM - 3/4	-76	48	64 QAM - 2/3	-74	54
Sensitivity (dBm)	Rate (Mbps)	Modulation and Coding Rate																										
-90	6	BPSK - 1/2																										
-89	9	BPSK - 3/4																										
-87	12	QPSK - 1/2																										
-85	18	QPSK - 3/4																										
-82	24	16 QAM - 1/2																										
-79	36	16 QAM - 3/4																										
-76	48	64 QAM - 2/3																										
-74	54	64 QAM - 3/4																										
	802.11n																											
		<table border="1"> <thead> <tr> <th>Sensitivity (dBm)</th> <th>Rate (Mbps)</th> <th>Modulation and Coding Rate</th> </tr> </thead> <tbody> <tr> <td>-69</td> <td>150</td> <td>64 QAM - 5/6</td> </tr> <tr> <td>-66</td> <td>300</td> <td>64 QAM - 5/6</td> </tr> </tbody> </table>	Sensitivity (dBm)	Rate (Mbps)	Modulation and Coding Rate	-69	150	64 QAM - 5/6	-66	300	64 QAM - 5/6																	
Sensitivity (dBm)	Rate (Mbps)	Modulation and Coding Rate																										
-69	150	64 QAM - 5/6																										
-66	300	64 QAM - 5/6																										
Form Factors	PCI-Express Half-MiniCard																											
Weight	0.1133 oz (3.212 g)																											

Technical Specifications – Networking and Communications

Dimensions	1.04 x 1.17 x 0.042 in (26.65 x 29.85 x 1.067 mm)	
Operating Voltage	3.3V +/- 9%	
Temperature	Operating: Non-operating:	14° to 158° F (-10° to 70° C) -40° to 176° F (-40° to 80° C)
Humidity	Operating: Non-operating:	10% to 90% (non-condensing) 5% to 95% (non-condensing)
Altitude	Operating: Non-operating:	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)

HP WLAN 802.11 a/b/g/n Wireless 2x2 Dual-Band Minicard with Bluetooth Combo*		
Dimensions (L x H)	1.18 x 1.06 in (30 x 26.8 mm)	
Chipset	Atheros AR9462	
System interface	PCI-Express Mini Card	
Network standard	802.11 a/b/g/n	
Frequency band	Bluetooth: 2.402 - 2.480 GHz	
	Wi-Fi: 802.11a/n – 4.9 – 4.95 GHz (Japan), 5.15 – 5.25 GHz, 5.25 – 5.35 GHz, 5.47 – 5.725 GHz, 5.825 – 5.850 GHz 802.11b/g/n 2.402-2.482 GHz	
Bluetooth	The WLAN + Bluetooth Combo Mini Card meets all of the requirements to support Bluetooth 4.0 and is backwards compatible with 2.1 with EDR and 3.0 High speed.	
Operating temperature	14° to 158°F, operating (-10° to 70°C, operating)	
Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)	
Humidity	10-90% operating 5-95% non-operating	
Operating voltage	3.3 V ±9% I/O supply voltage	
Power Consumption	Platform/WLAN Mode	Power Consumption
	Wi-Fi	
	Transmit Mode	2 W

Technical Specifications – Networking and Communications

	Receive Mode	1.6 W
	Idle mode (PSP) (WLAN Associated)	250mW
	Idle mode (WLAN unassociated)	100mW
	Radio disabled	75mW
	Bluetooth	
	Peak Operating	330 mW
	Receive	230 mW
	USB Selective Suspend	17 mW
Output Power	2.4G: +13.5dBm minimum	
	5G: +12dBm minimum	
Security	IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only	
	802.1x authentication	
	WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES	
	IEEE 802.11i	
	Cisco Certified Extensions, all versions through V5	
	WAPI	
Antenna	Dual antenna connectors	
* Wireless access point and Internet service required and not included. Availability of public wireless access points limited.		

Intel® 7260 802.11ac PCIe x1 BT

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
Interoperability	Wi-Fi certified

Technical Specifications – Networking and Communications

Frequency Band	<p>802.11b/g/n</p> <ul style="list-style-type: none"> 2.402 – 2.482 GHz <p>NOTE: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> <p>802.11a/n</p> <ul style="list-style-type: none"> 4.9 – 4.95 GHz (Japan) 5.15 – 5.25 GHz 5.25 – 5.35 GHz 5.47 – 5.725 GHz 5.825 – 5.850 GHz <p>NOTE: Indonesia no support this band)</p>
Data Rates	<ul style="list-style-type: none"> 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
Modulation	<p>Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM</p>
Security¹	<ul style="list-style-type: none"> IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through CCX4 and CCX Lite WAPI
Network Architecture Models	<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)</p>
Roaming	<p>IEEE 802.11 compliant roaming between access points</p>
Output Power²	<ul style="list-style-type: none"> 802.11b : +16dBm minimum 802.11g : +14dBm minimum 802.11a : +14dBm minimum 802.11n HT20(2.4GHz) : +13dBm minimum 802.11n HT40(2.4GHz) : +13dBm minimum 802.11n HT20(5GHz) : +12dBm minimum 802.11n HT40(5GHz) : +12dBm minimum 802.11ac 80MHz(5GHz) : +11dBm minimum
Power Consumption	<p>Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated)</p>

Technical Specifications – Networking and Communications

	Radio disabled: 30 mW	
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications	
Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g Or Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED White – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 	

Wireless LAN

Intel 7260 802.11 a/b/g/nM.2 BT NIC

Intel® I217LM GbE Network Connection (integrated)

Connector

RJ-45

System Interface

Integrated on PCA

Technical Specifications – Networking and Communications

Controller	Intel I217LM GbE platform LAN connect networking controller	
Memory	24 KB FIFO packet buffer memory	
Data rates supported	10/100/1000 Mbps	
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3u	
Bus architecture	PCI Express and SMBus	
Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)	
Power requirement	Requires 3.3V and 0.9V or just 3.3V with integrated regulators Power consumption 0.733 Watts	
Boot ROM support	Yes	
Network transfer mode	Full-duplex	
	Half-duplex (not supported for the 1000BASE-T transceiver)	
Network transfer rate	10BASE-T (half-duplex) 10 Mbps	
	10BASE-T (full-duplex) 20 Mbps	
	100BASE-TX (half-duplex) 100 Mbps	
	100BASE-TX (full-duplex) 200 Mbps	
	1000BASE-T (full-duplex) 2000 Mbps	
Environmental	Operating Temperature:	0° to 85° C
	Operating Humidity:	60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic, WFM 2.0	
Alerting	ASF 2.0 support; AMT 9.0 support	

Intel® Ethernet I210-T1 Gigabit Network Adapter

Technical Specifications – Networking and Communications

Connector	RJ-45	
System Interface	PCI Express x1	
Controller	Intel® I210 Gigabit Ethernet Controller	
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers	
Data rates supported	10/100/1000 Mbps	
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3AB 802.3u 802.3x flow control	
Bus architecture	PCI-E 2.1	
Data path width	X1, 250 MB/s, Bi-directional interface	
Data transfer mode	Bus-master DMA	
Hardware certifications	FCC, B, CE, TUV-c, TUVus Mark Canada and United States, TUV-GS Mark for European Union	
Power requirement	Aux 3.3 V, 3.0 Watts in 1000 base-T and 1.0 Watts in 100 Base-T	
Boot ROM support	Yes 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps	
Network transfer rate	10BASE-T (half-duplex) 10 Mbps	
	10BASE-T (full-duplex) 20 Mbps	
	100BASE-TX (half-duplex) 100 Mbps	
	100BASE-TX (full-duplex) 200 Mbps	
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI bus)	
Environmental	Operating Temperature:	32° to 132° F (0° to 55° C)
	Operating Humidity:	85% at 131° F (55° C)
Management	WOL, PXE, DMI, WFM 2.0	

Technical Specifications – Networking and Communications

Intel Centrino Advance-N 6205 Wireless Network Interface Connection	
Wireless LAN Standards	IEEE 802.11a/b/g/n
	IEEE 802.11 e, 802.11i, 802.11d, 802.11d, 802.11h
Interoperability	Wi-Fi certified (802.11 a/b/g/n WMM, WPA, WPA2 and WPS)
	Tested with wireless access points from several major manufacturers
	OS compatible with Microsoft Windows, Win7 and XP
	Cisco Compatible Extensions Program compliant (802.11a/b/g only) with Microsoft Windows XP and Windows 7
Frequency Band	2.4 GHz and 5 GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps
	802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128bits), TKIP, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP, MSCHAP, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM, EAP-AKA PAP, CHAP, TLS, GTC
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer)
	Infrastructure (Access Point Required)
	Intel® My Wifi Technology (iPAN)
Roaming	Provide seamless roaming between like access points (same frequency band)
Output Power (for CCK)	15 dBm
Output Power (for OFDM; power varies by data rate)	15 dBm
Power Consumption	Transmit: 2.3 Watts (average, with one spatial streams)

Technical Specifications – Networking and Communications

	Receive: 1.9 Watts (average with two receive chains)	
	Idle mode: 30mW – 40mW (average)	
	Radio off: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance	
Range	802.11 a - Typical (@6 Mbps)	600 feet - Outdoor Open Area 150 feet - Indoor, Office environment
	802.11 b - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
	802.11 g - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
Form Factors	USDT:	MiniPCI-Express
	CMIT & SFF:	PCIe
Weight	0.013 lb (4.0 g)	
Dimensions	1.1 x 1.2 in (26.8 x 30.0 mm)	
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%	
Temperature	Operating:	32° to 176° F (0° to 80° C)
	Non-operating:	-40° to 176° F (-40° to 80° C)
Humidity	Operating:	10% to 90% (non-condensing)
	Non-operating:	5% to 90% (non-condensing)
	Microsoft Windows XP	Microsoft Windows Win 7
Configuration Utility	<ul style="list-style-type: none"> Microsoft Windows XP Wireless Network Connection Manager Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support) 	Intel IHV extensions for Win7 available to support Cisco Compatible Extensions

Technical Specifications - Audio

AUDIO

High Definition Audio	
Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC221 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance)
	Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver)
	Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load)
	Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal.
	All ports are 3.5mm
Internal Speaker Amplifier	1.5W amplifier for the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses	Yes – Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Speaker	Yes
External Speaker Jack	Yes

Technical Specifications - Input/Output Devices

INPUT/OUTPUT DEVICES

HP USB Keyboard		
Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.12 x 6.47 x 0.96 in (46.03 x 16.43 x 2.44 cm)
	Weight	2 lb (0.9 kg)
Electrical	Operating voltage	+ 5VDC ± 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
Mechanical	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces

Technical Specifications - Input/Output Devices

	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	30 in (76.2 cm) on concrete, 16-drop sequence
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, KC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

HP PS/2 Keyboard

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.22 x 6.47 x 1.1 in (46.28 x 16.43 x 2.79 cm)
	Weight	2 lb (0.9 kg) minimum
Electrical	Operating voltage	+ 5VDC \pm 10%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
Key-leveling mechanisms	For all double-wide and greater-length keys	

Technical Specifications - Input/Output Devices

	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	50-dBA maximum sound pressure level
	Operating temperature	32° to 104° F (0° to 40° C)
	Non-operating temperature	-22° to 149° F (-30° to 65° C)
	Operating humidity	15% to 80% (non-condensing at ambient)
	Non-operating humidity	15% to 90% (non-condensing at ambient)
	Operating shock	N/A
	Non-operating shock	65 inch 2.9 ms, six surface; 30g 266 inch/second; 50g 266 inch/second six surface
	Operating vibration	2-g peak acceleration
	Non-operating vibration	Starting at 5 Hz, vary the frequency of vibration from 5 to 500 Hz and back to 5 Hz at a Logarithmic sweep rate of 1 octave per minute.
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	29.93 in (76 cm) on concrete, 16-drop sequence
Approvals	CUL, ICES-003 Class B, FCC, CE Mark, TUV GS, VCCI, BSMI, C-Tick, KC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP USB Smart Card (CCID) Keyboard

Key Benefits:	<ul style="list-style-type: none"> • Protects against unauthorized access with smart card technology • Delivers even greater security when combined with a HP Client Security smart card and the HP Client Security Security Software • Combination of username and password or pin with a smart card or security token • Secures online transactions using digital signatures and certificates • Conforms to industry standards for ease of setup and use • Delivers long product life and quiet operation with high-impact materials and lubricated keys • Spill drain feature
----------------------	---

Technical Specifications - Input/Output Devices

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Form factor	USB basic smart card keyboard
	Colors	Carbonite/Silver
	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
	Weight	2 lb (0.9 kg) minimum
Electrical	Operating voltage	+ 5VDC \pm 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
Mechanical	Languages	30+ available
	Keycaps	Standard design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)

Technical Specifications - Input/Output Devices

	Operating shock	40 g, six surfaces		
	Non-operating shock	80 g, six surfaces		
	Operating vibration	2-g peak acceleration		
	Non-operating vibration	4-g peak acceleration		
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence		
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence		
SmartCard Function	Support	All ISO 7816 smart cards		
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)		
	Chipset	SCM STCII		
	Standard APIs supported	PC/SC, EMV2000, SET		
	Power	USB Port		
		Short circuit detection (protects smart card and reader)		
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)		
		Supports 3-V and 5-V cards		
	Power consumption	100-mA maximum draw		
	Communication	From card	9600 bps to 330,000 bps	
		From computer	12 Mbps (USB transfer speed)	
	Landing mechanism	Contact device	Friction contact	
		Card insertions rating	Up to 100,000 insertion cycles	
	Interface modes	CCID protocol		
Reader performance interface	USB connection			
Electro-magnetic standards	Europe	2004/108/EC		

Technical Specifications - Input/Output Devices

		USA	USAFCC part 15
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF		
Ergonomic Compliance	ISO 9241-4, TUVGS		
Kit Contents	Keyboard, I/O Security and Documentation CD, warranty card		
HP USB PS/2 Washable Keyboard			
Physical Characteristics	Keys	104 (US) Layout, 105 (EU) layout – depending upon country	
	Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)	
	Weight	1.7 lb (0.77 kg) minimum	
Electrical	Operating voltage	+ 5VDC ±5%	
	Power consumption	50-mA maximum (with three LEDs ON)	
	System interface	USB Type A plug connector	
	ESD	CE level 4, 15-kV air discharge	
	EMI - RFI	Conforms to FCC rules for a Class B computing device	
	Microsoft PC 99 - 2001	Functionally compliant	
Mechanical	Keycaps	Stepped -profile design	
	Switch actuation	55-g nominal peak force with tactile feedback	
	Switch life	20 million keystrokes	
	Switch type	Contamination-resistant switch membrane	
	Key-leveling mechanisms	For all double-wide and greater-length keys	
	Cable length	7 ft (2.2 m)	
	Microsoft PC 99 - 2001	Mechanically compliant	
	Acoustics	43-dBA maximum sound pressure level	
Environmental	Operating temperature	50° to 122° F (10° to 50° C)	
	Non-operating temperature	4° to 149° F (-20° to 65° C)	
	Operating humidity	10% to 95% (non-condensing at ambient)	
	Non-operating humidity	0% to 95% (non-condensing at ambient)	
	Operating shock	40 g, six surfaces	
	Non-operating shock	80 g, six surfaces	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	

Technical Specifications - Input/Output Devices

	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Operating system support	Windows® 7, Windows Vista, Windows XP Professional	
Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP Wireless Keyboard and Mouse

Keyboard	Dimensions (H x L x W)	1.09 x 18.1 x 6.47 in (27.87 x 460.3 x 164.3 mm)
	Weight – Without Two AA Alkaline Batteries	1.94 lb (880 g)
Mouse	Dimensions (H x L x W)	1.46 x 4.53 x 2.47 in (37 x 115 x 62.9 mm)
	Weight – Without Two AA Alkaline Batteries	0.15 lb (67 g)
Receiver	Dimensions (H x L x W)	0.33x 1.79 x 0.72 in (8.4 x 45.5 x 18.4 mm)
	Weight	0.21 oz (5.9 g)
	Range	32.8 ft (10 m)
System Requirements	<p>Windows 10, Windows 8, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows Vista or Windows XP</p> <p>Available USB port for the receiver</p> <p>CD-ROM Drive</p> <p>* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See http://www.microsoft.com.</p>	
Approvals	Product Safety	UL; CSA /TUV (Europe only); CE Mark; CB Report
	Ergonomics	ANSI; ISO (Europe only); GS Mark (Germany only)
	EMC	FCC; CE; ACA (-tick); BSMI; KC ; VCCI
	CE Mark	EN 55022:2010; EN 55024; EN 301489-1; EN 61000

Technical Specifications - Input/Output Devices

	Design Guidelines for PCs	PC 99 – connector overmold colors; PC 2001 – full functionality
	Telecom	All local telecom requirements and approvals for intended markets
	USA	FCC Title 47 CFR, Par 15, Subpart C; other local requirements
	Country Support	US, Belgium, Switzerland, Spain, Denmark, Netherlands, France, Germany, Italy, Portugal, Sweden, Norway, Finland, UK, Poland, Czech Republic, Turkey, Greece, Austria, Bulgaria, Cyprus, Estonia, Hungary, Ireland, Latvia, Lithuania, Luxemburg, Malta, Romania, Slovakia, Slovenia, Vietnam, HK, Australia, NZ, Malaysia, Singapore, Indonesia, Philippines, Thailand, Canada, China, Japan, Korea, Taiwan, India, Venezuela, Ecuador, Russia, Ukraine, Israel, Croatia, United Arab Emirates, Peru, Brazil, Chile, Argentina, Mexico, South Africa, and up to 193 countries worldwide.
Environmental	Keyboard contains 25% post-consumer recycled plastic material	
Encryption	128bit AES Encryption	

HP PS/2 Mouse		
Dimensions (H x L x W)	1.46 x 2.48 x 4.53 in (3.70 x 6.29 x 11.50 cm)	
Weight	3.53 oz (100g; +10g/- 5 g)	
Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non condensing at ambient)
	Non-operating humidity	10% to 90% (non condensing at ambient)
	Operating shock	40 g, 6 surfaces

Technical Specifications - Input/Output Devices

	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
Electrical	Operating voltage	5 VDC \pm 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
Mechanical	Resolution	800 DPI
	Tracking speed	10 in/s (25.4 cm/s) maximum
	Acceleration	\pm 15%
	Switch actuation	65 \pm 20 gf
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	80 km
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
Scroll wheel	Width	6 mm
	Diameter	22.5 \pm 0.2 mm
	Maximum rotation force	50 gf-cm
	Switch type	Light force micro-switch
	Switch life	1 million operations

Technical Specifications - Input/Output Devices

	Mechanical life	Minimum 200,000 revolutions
Regulatory Approvals	UL/cUL, FCC, CE Mark, TUV/GS, VCCI, KCC, BSMI, C-Tick	

HP USB Mouse

Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.7 x 11.5 x 6.3 cm)
Weight	0.22 lb (0.10 kg)
Cable length	70.9 in (180 cm)
System requirements	Available USB port

HP USB 1000dpi Laser Mouse

Dimensions (H x L x W)	1.47 x 4.53 x 2.47 in (37.3 x 114.97 x 62.86 mm)	
Weight	3.360 oz (102g)	
Cable length	70.9 in (180 cm)	
System requirements	Available USB port	
Environmental	Operating Temperature	32° to 104° F (0° to 40° C)
	Non-operating Temperature	-4° to 140° F (-20° to 60° C)
	Operating Humidity	10% to 90% (non-condensing at ambient)
Mechanical	Resolution	1000dpi
	Tracking Speed	45 cm/sec
	Cable Length	70.9 in (180 cm)

HP USB PS/2 Washable Mouse

Technical Specifications - Input/Output Devices

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)	
Weight	4.44 oz (126 g)	
Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	10% to 90% non-condensing
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
Electrical	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector or USB
	ESD	CE level 2 8 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
Mechanical	Resolution	1000 ± 20% DPI
	Tracking speed	14 in/s (35.56 cm/s) maximum
	Acceleration	2 g
	Switch actuation	70 g nominal peak force
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches

Technical Specifications - Input/Output Devices

	Tracking mechanism life	8.8 ft total 70 cm+ 2m extension
	Cable length	Mechanically compliant
	Microsoft PC99 - 2001	1000 ± 20% DPI
Scroll wheel	Width	6 mm
	Diameter	1 in (25.4 mm)
	Maximum rotation force	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	3 million operations
	Mechanical life	Minimum 200,000 revolutions
Regulatory Approvals	FCC, CE Mark, ICES-003-B, IP66/NEMA4X	

Technical Specifications – Power

POWER

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply	DM	USDT	SFF	TWR	
Standard Efficiency	65W active PFC 87% efficient 89% average efficiency at 230V 88% average efficiency at 115V	Integrated graphics: Discrete graphics:	135W active PFC 87% efficient 180W active PFC 87% efficient	240W active PFC 240W active PFC	320W active PFC 320W active PFC
80 PLUS Gold	N/A	N/A	87/90/87% efficient at 20/50/100% load (115V) 89/91/90% efficient at 20/50/100% load (230V) 240W active PFC	87/90/87% efficient at 20/50/100% load (115V) 89/92/90% efficient at 20/50/100% load (230V) 320W active PFC	
80 PLUS Platinum	N/A	N/A	90/92/89% efficient at 20/50/100% load (115V) 90/93/91% efficient at 20/50/100% load (230V)	90/92/89% efficient at 20/50/100% load (115V) 90/94/91% efficient at 20/50/100% load (230V)	
Operating Voltage Range	90 - 264 VAC	90 - 264 VAC	90 - 264 VAC	90 - 264 VAC	
Rated Voltage Range	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	
Rated Line Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	

Technical Specifications – Power

Operating Line Frequency	47 – 63 Hz	47 – 63 Hz	47 – 63 Hz	47 – 63 Hz
Rated Input Current	N/A	N/A	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply		135W: 2.4A 180W: 2.9A	4A	5.5A
DC Output	+19.5V	N/A	N/A	N/A
Current Leakage (NFPA 99: 2102)	<p>Less than 500 microamps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.</p> <p>Less than 100 microamps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.</p>			
Power Supply Fan	N/A	N/A	92=>70mm variable speed	92mm variable speed
Power cord length	N/A	N/A	6.0 ft. (1.83 m)	6.0 ft. (1.83 m)
External Power Adapter				
Dimensions	2.2 x 1.2 x 4.5 in 55 x 30 x 113.5 mm	2.8 x 1.7 x 6.6 in 70 x 42 x 167.5 mm	N/A	N/A
Total Cord Length	12 ft 8 in	12 ft 8 in	N/A	N/A

Technical Specifications – Weights & Dimensions



WEIGHTS & DIMENSIONS

Weights & Dimensions

(configured with 1 HDD & 1 ODD; DM configured with 1 HDD only)


	DM	USDT	SFF	TWR
Chassis (W x H x D)	6.9 x 1.3 x 7.0 in 175 x 34 x 177 mm	9.9 x 2.6 x 10 in 251 x 66 x 254 mm	13.3 x 3.95 x 14.9 in 338 x 100 x 379 mm	6.7 x 15.7 x 17.4 in 170 x 399 x 442 mm
System Volume	62.79 cu in 1.05 L	257.5 cu in 4.2 L	782.7 cu in 12.8 L	1828 cu in 30 L
System Weight*	2.9 lb 1.3 kg	6.8 lb 3.1 kg	16.7 lb 7.6 kg	20.5 lb 9.3 kg
Max Supported Weight (desktop orientation)	77.0 lb 35.0 kg	77.0 lb 35.0 kg	77.0 lb 35.0 kg	77.0 lb 35.0 kg
Stand Dimensions	77x 4.6 x 6.3 in 19.5 x 117 x 160 mm Weight: 47g/ .1 lbs.	1.1 x 4.9 x 6.7 in 27 x 125 x 170 mm	1.1 x 7.0 x 7.9 in 29 x 178 x 200 mm	N/A
Packaging (H x W x D)	7.8 x 11.4 x 19.7 in 198 x 290 x 500 mm	8.6 x 15.7 x 19.7 in 218 x 398 x 500 mm	9.0 x 19.7 x 23.4 in 229 x 500 x 594 mm	11.6 x 19.7 x 23.2 in 295 x 500 x 590 mm
Shipping Weight	9.0 lb. 4.1 kg	14.4 lb 6.5 kg	17.9 lb 8.1 kg	28.8 lb 13.1 kg
Palletization Profile	8-units per layer 10/12 layer max 80/96 per pallet 47.126 x 39.291 x 99.252 in (including pallet)	6-units per layer 10-layer max. 60-units per pallet 47.126 x 39.291 x 91.535 in (including pallet)	4-units per layer 10-layer max. 40-units per pallet 47.126 x 39.291 x 88.858 in (including pallet)	4-units per layer 8-layer max. 32-units per pallet 47.126 x 39.291 x 98.622 in (including pallet)
	<i>Dependent on 40-Ft Stnd. Sea Container or 40-Ft High-cube Sea Container is used)</i>			

Technical Specifications – Weights & Dimensions

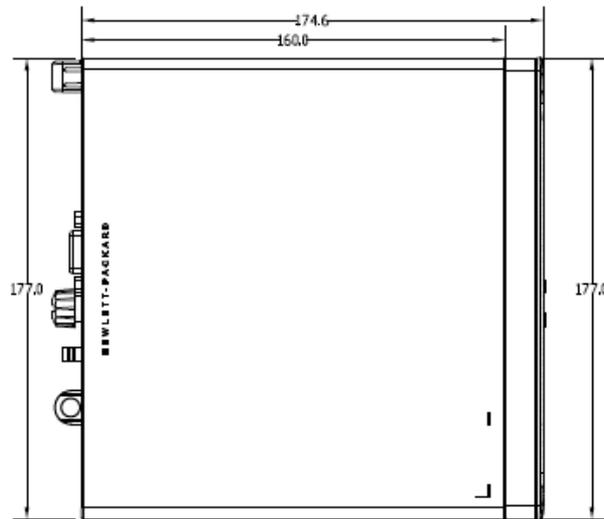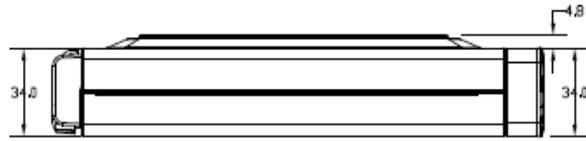


**Desktop
Mini**

Technical Specifications – Weights & Dimensions

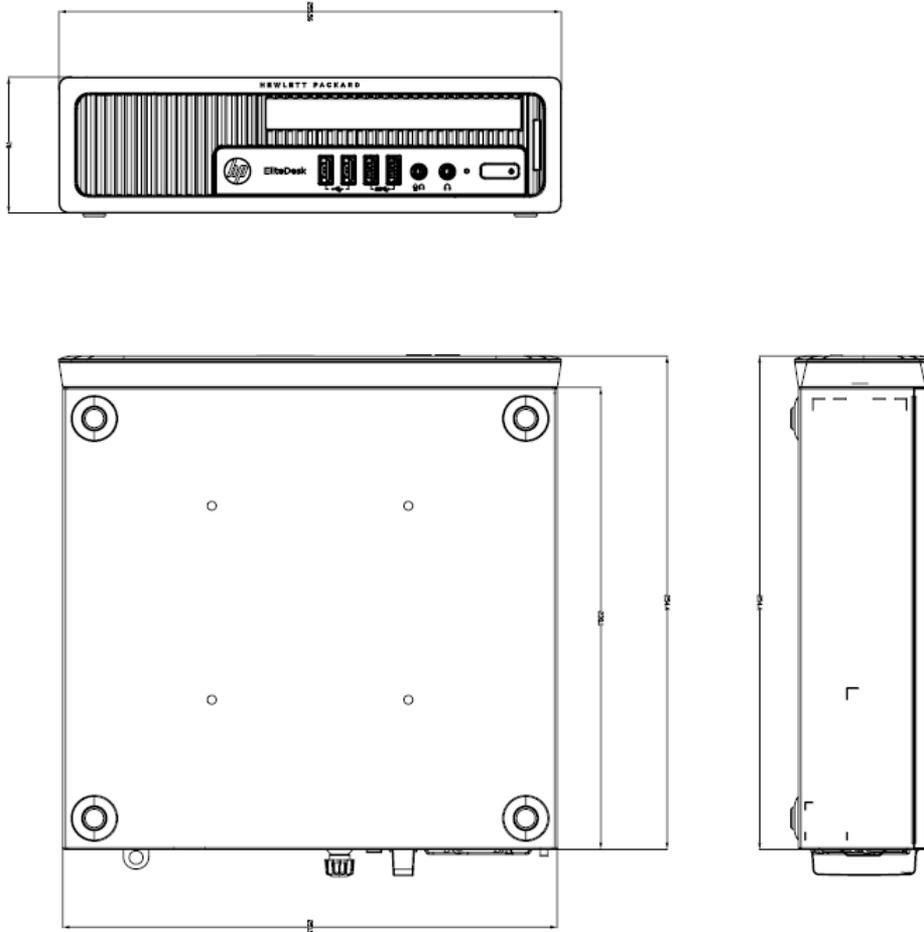


**Ultra-slim
Desktop**


Technical Specifications – Weights & Dimensions

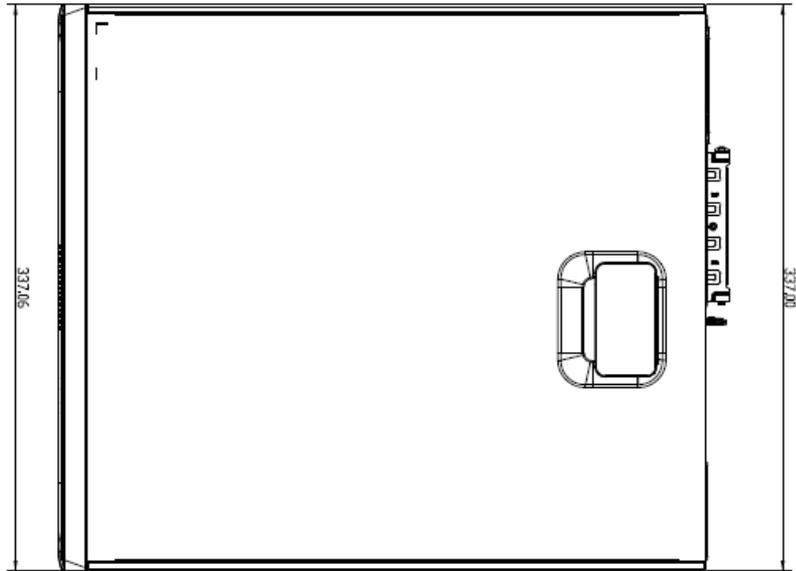



Small Form Factor

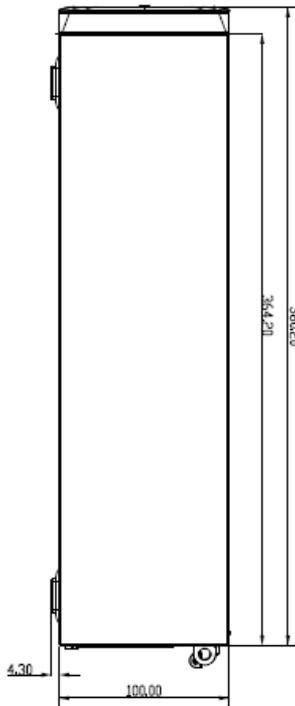

Technical Specifications – Weights & Dimensions

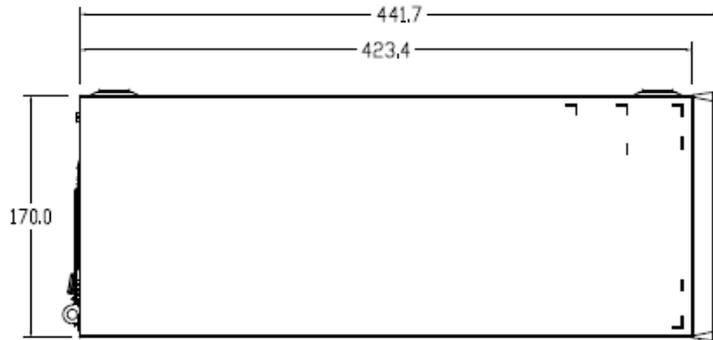

Tower

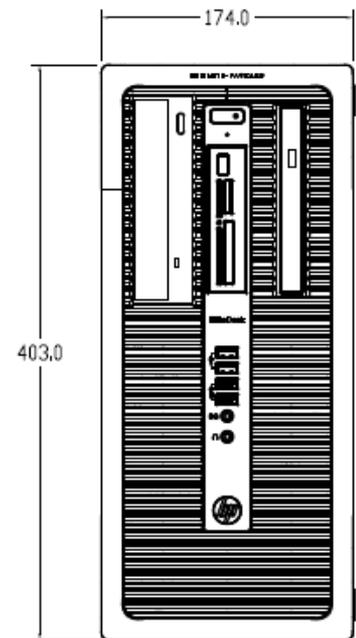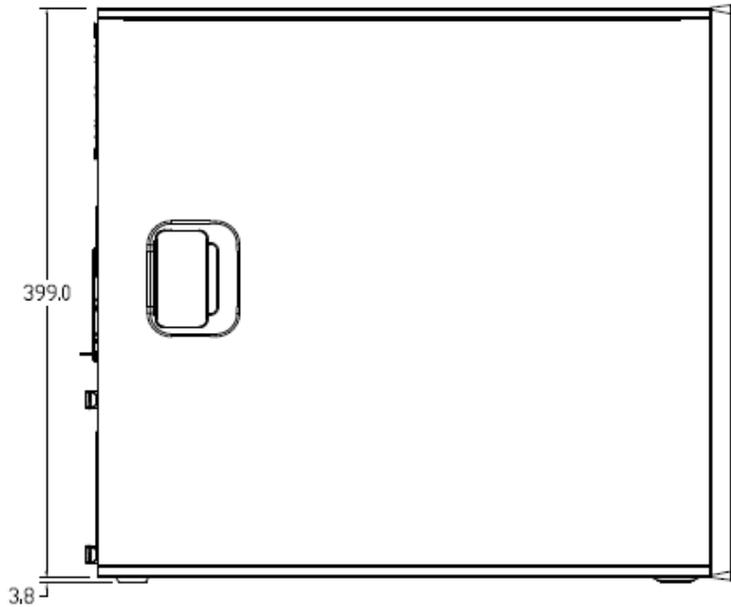

Technical Specifications – Miscellaneous Features

MISCELLANEOUS FEATURES

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 -- memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, boot block recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- HP PC Hardware Diagnostics UEFI:
 - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Additional Features

Description

Towerable Orientation

Product can be oriented as either a desktop (horizontal) or a tower (vertical)

Technical Specifications – Miscellaneous Features

Drive Lock

Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.

DPS Access through F10 Setup during Boot

Drive Protection System

A diagnostic hard drive self-test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user

Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced

The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures

SMART Technology (Self-Monitoring, Analysis and Reporting Technology)

Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted

SMART I - Drive Failure Prediction

Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count

SMART II - Off-Line Data Collection

By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure

SMART III - Off-Line Read Scanning with Defect Reallocation

IOEDC: I/O Error Detection Circuitry

Detects errors in Read/Write buffers on HDD cache RAM

SMART IV - End-to-End CRC for hard drives

Interface in F10 setup provides confirmation of SMART IV support.

Technical Specifications – Environmental Data

ENVIRONMENTAL DATA

Eco-Label Certifications & Declarations

This product series has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR®
- IT ECO declaration
- EPEAT® Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Model	Energy Consumption in accordance with US ENERGY STAR® test method (typically configured)	115 VAC	230 VAC	100 VAC
DM	Normal Operation (Short idle)	8.08 W	8.18 W	8.12 W
	Normal Operation (Long idle)	6.58 W	6.73 W	6.67 W
	Sleep	1.61 W	1.57 W	1.64 W
	Off	1.02 W	1.01 W	1.04 W
USDT	Normal Operation (Short idle)	13.14 W	14.25 W	13.21 W
	Normal Operation (Long idle)	11.57 W	12.25 W	11.19 W
	Sleep	0.74 W	0.77 W	0.75 W
	Off	0.54 W	0.57 W	0.54 W
SFF	Normal Operation (Short idle)	16.32 W	16.04 W	16.07 W
	Normal Operation (Long idle)	14.23 W	13.46 W	14.25 W
	Sleep	1.56 W	1.64 W	1.56 W
	Off	0.54 W	0.60 W	0.53 W
TOWER	Normal Operation (Short idle)	17.62 W	17.92 W	17.21 W
	Normal Operation (Long idle)	14.95 W	16.28 W	15.20 W
	Sleep	1.47 W	1.58 W	1.46 W
	Off	0.51 W	0.60 W	0.50 W

NOTE: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Technical Specifications – Environmental Data

Model	Heat Dissipation*	115 VAC	230 VAC	100 VAC
DM	Normal Operation (Short idle)	28 BTU/hr	28 BTU/hr	28 BTU/hr
	Normal Operation (Long idle)	23 BTU/hr	23 BTU/hr	23 BTU/hr
	Sleep	6 BTU/hr	5 BTU/hr	6 BTU/hr
	Off	3 BTU/hr	3 BTU/hr	4 BTU/hr
USDT	Normal Operation (Short idle)	45 BTU/hr	49 BTU/hr	45 BTU/hr
	Normal Operation (Long idle)	40 BTU/hr	42 BTU/hr	38 BTU/hr
	Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
	Off	2 BTU/hr	2 BTU/hr	2 BTU/hr
SFF	Normal Operation (Short idle)	56 BTU/hr	55 BTU/hr	55 BTU/hr
	Normal Operation (Long idle)	49 BTU/hr	46 BTU/hr	49 BTU/hr
	Sleep	5 BTU/hr	6 BTU/hr	5 BTU/hr
	Off	2 BTU/hr	2 BTU/hr	2 BTU/hr
TOWER	Normal Operation (Short idle)	60 BTU/hr	61 BTU/hr	59 BTU/hr
	Normal Operation (Long idle)	51 BTU/hr	56 BTU/hr	52 BTU/hr
	Sleep	5 BTU/hr	5 BTU/hr	5 BTU/hr
	Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Model	(Typically configured)		
DM	Idle	3.6	25
	Fixed Disk (random writes)	3.6	24
USDT	Idle	3.6	27
	Fixed Disk (random writes)	3.6	27

Technical Specifications – Environmental Data

SFF	Idle	3.6	26
	Fixed Disk (random writes)	3.6	26
TOWER	Idle	3.6	25
	Fixed Disk (random writes)	3.6	26

Longevity and This product can be upgraded, possibly extending its useful life by several years.

Upgrading Upgradeable features and/or components contained in the product may include:

- 10 externally accessible USB ports
- DIMM memory slots
- 1 PCI Express x16 graphics slot
- 3 PCI Express x1 accessory slot
- 2 2.5" internal storage drive bay
- 1 2.5" internal storage drive bay
- 1 3.5" Media Card Reader bay
- 1 external slim optical drive bay
- 5.25" Half height optical drive bay

Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries

Batteries used in the product do not contain:

- Mercury greater the 1ppm by weight
- Cadmium greater than 20ppm by weight

Battery Size CR2032 (coin cell)

Battery Type Lithium

Model Additional Information

- DM**
- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
 - This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
 - This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
 - This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
 - This product has obtained a Korea KCC EMC certificate.
 - Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
 - This product contains 16% post-consumer recycled plastic (by wt.)
 - This product is 91.3% recyclable when properly disposed of at end of life.

Technical Specifications – Environmental Data

- **ALL Form Factors are UL Certified**

Packaging Materials

- External:
 - PAPER/Corrugated 852 g
- Internal:
 - PLASTIC/EPE (Expanded Polyethylene) 38 g
 - PLASTIC/Polyethylene low density 13 g
 - PLASTIC/Polypropylene 8 g
- The plastic packaging material contains at least 9.5 % recycled content.
- The corrugated paper packaging materials contains at least 42.3% recycled content.

USDT

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- This product has obtained a Korea KCC EMC certificate.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 12.2% post-consumer recycled plastic (by wt.)
- This product is 95.4% recyclable when properly disposed of at end of life.
- **ALL Form Factors are UL Certified**

Packaging Materials

- External:
 - PAPER/Corrugated 1526.2 g
- Internal:
 - PLASTIC/Polyethylene low density 177 g
- The PAPER/Corrugated material contains at least 49.42% recycled content.
- • The PLASTIC/Polyethylene low density material contains at least 60.42% recycled content.

SFF

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net
- This product has obtained a Korea KCC EMC certificate.
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.

Technical Specifications – Environmental Data

- This product contains 14.8% post-consumer recycled plastic (by wt.)
- This product is 94.1% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 2300 g
- Internal:
 - PLASTIC/EPE (Expanded Polystyrene) 110 g
 - PLASTIC/Polyethylene low density 56 g
 - PLASTIC/Polypropylene 15 g

The plastic packaging material contains at least 60.42 % recycled content.

The corrugated paper packaging materials contains at least 38.38% recycled content.

TOWER

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- This product has obtained a Korea KCC EMC certificate.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 14.9% post-consumer recycled plastic (by wt.)
- This product is 95.5% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 2280 g
- Internal:
 - PLASTIC/EPE (Expanded Polystyrene) 144 g
 - PLASTIC/Polyethylene low density 40 g
 - PLASTIC/Polypropylene 15 g

The PAPER/Corrugated material contains at least 53.5% recycled content.

The PLASTIC/Polyethylene low density material contains at least 60.42% recycled content.

The PLASTIC/EPE-Expanded Polyethylene material contains at least 60.42% recycled content.

The PLASTIC/Polypropylene materials contains at least 60.42% recycled content.

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized

Technical Specifications – Environmental Data

that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions)

Technical Specifications – Environmental Data

is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

**Hewlett-Packard
Corporate
Environmental
Information**

For more information about HP's commitment to the environment:
Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Options and Accessories (sold separately and availability may vary by country)

Communication Devices

	DM	USDT	SFF/TWR	Part Number
Intel Ethernet I210 – T1 Gbe NIC			X	E0X95AA
Intel 6205 802.11 a/b/g/n PCIe x1 NIC			X	E0X93AA
HP WLAN 802.11 a/g/n 2x2 DualBand PCIe x1 Card			X	J5C51AA

Graphics Solutions

	DM	USDT	SFF/TWR	Part Number
AMD Radeon HD 8350 Graphics (PCIe x16)			X	E1C63AA
AMD Radeon HD 8490 Graphics Card			X	E1C64AA
Nvidia NVS 310 Graphics (PCIe x16)			X	A7U59AA
Nvidia NVS 315 Graphics (PCIe x16)			X	E1C65AA
HP USB Graphics Adapter		X	X	NL571AA
HP DisplayPort Cable Kit	X	X	X	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	X	X	X	NR078AA
HP DisplayPort To DVI-D Adapter	X	X	X	FH973AA
HP DisplayPort to HDMI Adapter	X	X	X	BP937AA
HP DisplayPort to VGA Adapter	X	X	X	AS615AA
HP DMS-59 to Dual DVI Cable			X	DL139A
HP DMS-59 to Dual DisplayPort Adapter			X	XP688AA
HP DisplayPort to HDMI 1.4 Adapter	X	X	X	K2K92AA

Data Storage Drives and Accessories

	DM	USDT	SFF/TWR	Part Number
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X	QK554AA
HP Desktop Mini DVD-Writer ODD	X			K9Q83AA
HP Desktop Mini I/O	X			K9Q82AA
HP Desktop Mini Rack Mount	X			G1K21AA
HP Desktop Mini Security/Dual Vesa Sleeve	X			G1K22AA
HP Desktop 65w Mini Power Supply Kit	X			TBD
HP Desktop 90w Mini Power Supply Kit	X			TBD
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X	QK555AA
HP 1-TB 10K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X	C2T91AA
HP 128-GB SATA 3.0Gb/s Solid State Drive	X	X	X	QV063AA
HP 160-GB SATA 3.0Gb/s Solid State Drive	X	X	X	QV064AA*
HP 500-GB SATA 3.0Gb/s Solid State Hybrid Drive	X	X	X	E1C62AA
HP 128-GB SED Opal 2 Solid State Drive	X			G1K24AA
128 GB Turbo Drive SSD (PCIe card)			X	J5V07AA
HP Slim Removable SATA Hard Drive Enclosure (frame & carrier)		X	X	C1N41AA
HP Slim Removable SATA Hard Drive Enclosure (carrier only)		X	X	E3F39AA
HP Removable SATA Hard Drive Enclosure (Frame & Carrier)			TWR only	RY102AA
HP Removable SATA Hard Drive Enclosure (Carrier Only)			TWR only	RY103AA

Options and Accessories (sold separately and availability may vary by country)

HP Chassis (1bay) Security Kit		TWR only	AR639AA
HP Desktop Mini DVD Super Multi-Writer ODD Expansion Module	X		K9Q83AA

*Not available in all regions.

Summary of Changes

Input Devices	DM	USDT	SFF/TWR	Part Number
HP USB Keyboard	X	X	X	QY776AA
HP USB Gray Keyboard	X	X	X	B6B64AA
HP USB Smart Card (CCID) Keyboard	X	X	X	BV813AA
HP USB Keyboard and Mouse Kit	X	X	X	B1T09AA
HP USB Washable Keyboard	X	X	X	VF097AA
HP USB and PS/2 Washable Mouse	X	X	X	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	X	X	X	BU207AA
HP USB Grey Mouse	X	X	X	K7W54AA
HP PS/2 Mouse	X	X	X	QY775AA
HP USB Mouse	X	X	X	QY777AA
HP USB 1000dpi Laser Mouse	X	X	X	QY778AA
HP USB Gray Mouse	X			K7W54AA
HP Wireless Keyboard and Mouse Combination*	X	X	X	QY449AA
HP USB Antimicrobial Keyboard and Mouse (China Only)	X	X	X	K7X25AA
HP Desktop Mini I/O Expansion Module	X			K9Q84AA

*Keyboard contains 25% post-consumer recycled plastic material

System Memory	DM	USDT	SFF/TWR	Part Number
HP 4GB DDR3-1600 (PC3-12800) DIMM			X	B4U36AA
HP 8GB DDR3-1600 (PC3-12800) DIMM			X	B4U37AA
HP 4GB DDR3-1600 (PC3-12800) SODIMM	X	X		B4U39AA
HP 8GB DDR3-1600 (PC3-12800) SODIMM	X	X		B4U40AA

Multimedia Devices	DM	USDT	SFF/TWR	Part Number
HP Slim DVD-ROM Drive		X	X	VP033AA
HP Slim SuperMulti DVD Writer Drive		X	X	QS209AA
HP USB HD 720P v2 Business Webcam	X	X	X	D8Z08AA
HP Business Headset	X	X	X	QK550AA
HP USB Business Speakers	X	X	X	D9J19AA

Removable Media Storage	DM	USDT	SFF/TWR	Part Number
HP 14-n-1 Media Card Reader			X	TBD

Security Devices	DM	USDT	SFF/TWR	Part Number
HP USDT Rear Port Controller Cover		X		VN571AA
HP Solenoid Lock and Hood Sensor (USDT/SFF)		X	X	E0X97AA

Summary of Changes

HP Solenoid Lock and Hood Sensor (TWR)			TWR only	E0X96AA
HP SFF Wall Mount/Security Sleeve			SFF only	VN570AA
HP UltraSlim Cable Lock	X	X	X	H4D73AA

Stands and Accessories

	DM	USDT	SFF/TWR	Part Number
HP Integrated Work Center – Desktop Mini / Thin Client (IWCdm)	X			G1V61AA
HP Integrated Work Center Stand (SFF)			SFF only	QP897AA
HP USDT Tower Stand		X		VN568AA
HP SFF Tower Stand			SFF only	VN569AA
HP DM Chassis Tower Stand	X			G1K23AA
HP 600/800 Tower Bezel Kit			TWR only	E1C66AA
HP 800/600 SFF Bezel Kit			SFF only	E3F27AA
HP 800 USDT Kit		X		E3F28AA
HP Serial Port Adapter (RS-232 compatible)			X	PA716A
HP Parallel Port Kit			X	KD061AA
HP PCI Expansion Kit			TWR only	E1V16AA
HP USB to Serial Adapter	X	X		J7B60AA

LANDesk Software (E-Delivery)

	Part Number
LANDesk Management Suite License - 1-499 Nodes E-Delivery	QY369AAE
LANDesk Management Suite License - 500-999 Nodes E-Delivery	QY370AAE
LANDesk Management Suite License - 1000-1999 Nodes E-Delivery	QY371AAE
LANDesk Management Suite License - 2000-4999 Nodes E-Delivery	QY372AAE
LANDesk Management Suite License - 5000-9999 Nodes E-Delivery	QY373AAE
LANDesk Security Suite License E-Delivery	QY379AAE
LANDesk Management Suite 1 Year Maintenance - 1-499 Nodes E-Delivery	HZ825AAE
LANDesk Management Suite 1 Year Maintenance - 500-999 Nodes E-Delivery	HZ826AAE
LANDesk Management Suite 1 Year Maintenance - 1000-1999 Nodes E-Delivery	HZ827AAE
LANDesk Management Suite 1 Year Maintenance - 2000-4999 Nodes E-Delivery	HZ828AAE
LANDesk Management Suite 1 Year Maintenance - 5000-9999 Nodes E-Delivery	HZ829AAE
LANDesk Security Suite 1 Year Subscription	HZ830AAE
LANDesk Patch Management 1 Year Subscription - 1-499 Nodes E-Delivery	HZ831AAE
LANDesk Patch Management 1 Year Subscription - 500-999 Nodes E-Delivery	HZ832AAE
LANDesk Patch Management 1 Year Subscription - 1000-1999 Nodes E-Delivery	HZ833AAE
LANDesk Patch Management 1 Year Subscription - 2000-4999 Nodes E-Delivery	HZ834AAE
LANDesk Patch Management 1 Year Subscription - 5000-9999 Nodes E-Delivery	HZ835AAE
LANDesk Patch Management 1 Year Subscription - 5000-9999 Nodes E-Delivery	HZ835AAE

Summary of Changes

© Copyright 2016 HP Development Company, L.P. All rights reserved.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

Summary of Changes

Date of change:	Version History:		Description of change:
	From v1 to v2		
May 28, 2014	From v2.0 to v2.1	Changed	Updated the wattage consumption for the DM.
May 30, 2014	From v2.1 to v2.2	Changed	Updated 3 rd party software
June 2, 2014	From v2.2 to v2.3	Changed	Processors, storage, environmental.
July 14, 2014	From v2.3 to v3	Update	Added the headings
July 16, 2014	From v3 to v27	Upgrade	Change the version so it would match the PB
July 18, 2014	From v27 to v28	Addition	Added a new description on processors
		Addition	Added a Section to the networking communication, a new wlan card
		Addition	Added a new section for (NON-SED) with a description, to the storage area
July 28, 2014	From v28 to v29	Addition	Added drawings to Weights and Dimensions section.
August 7, 2014	From v29 to v30	Addition	Additon to "Presintalled when purchased" the value "Windows 8.1 Pro for Education (64-bit)*"
		Change	In "Supports DDR3 memory up to 1333 MT/s data rate" change 1333 to 1600
		Change	The lower i in "128 GB Turbo Drive M.2 PCIe SSD"
September 29, 2014	From v30 to v31	Addition	Added new wireless connection under Networking/communications "Intel 7260 802.11 a/b/g/n M.2 BT NIC Wireless Network Connection (optional)" Added under Networking and Communications two new sections" HP WLAN 802.11 a/b/g/n 2x2 Dual Band PCIe x1 WLAN/Bluetooth Card" and "HP WLAN 802.11a/b/g/n Wireless 2x2 Dual-Band Minicard with Bluetooth Combo*"
		Addition	Added under security "Common Criteria Certified, Infineon TPM SLB9656TT1.2- 4.32 FW"
		Addition	Added under graphics the section "AMD Radeon R9 255 2GB PCIe x16 "
October 6, 2014	From v31 to v32	Removed	From section Security "Trusted Platform Module (TPM) 1.2"
		Change	Change the slim drive bay in pages 2-4 to add the number "5.25'" before it
		Remove	Remove from the section Slots on page 1 the sentence "(Available Jun '14)"
October 14, 2014	From v32 to v33	Change	Change the values of Environmental data for SFF, US, Tower
October 15, 2014	From v33 to v34	Change	Change the values of Environmental for DM
October 29, 2014	From v34 to v35	Remove	Remove windows Home and ultimate
November 12, 2014	From v35 to v 36	Remove	Several removals from Javier Lazaro in the document
		Addition	Added HP USB Gray Mouse value , added a value to the Max Supported Weighth
January 21, 2015	From v36 to v37	Addition	Added a note about Current Leakage
January 28, 2015	From v37 to v38	Addition	Under Optional Discrete Graphics Solutions, AMD Radeon R7 240 2GB FH PCIe x16 GFX for SFF Under Adapters and cables, HP DisplayPort To HDMI 1.4 Adapter for all 120GB SATA 2.5 Non-SED SSD (with 3.5" adapter when needed) 180GB SATA 2.5 Non-SED SSD (with 3.5" adapter when needed) 120GB SATA 2.5 Opal2 SED SSD (with 3.5" adapter when needed)

Summary of Changes

			180GB SATA 2.5 Opal2 SED SSD (with 3.5" adapter when needed) under KEYBOARDS AND POINTING DEVICES, HP USB Antimicrobial Keyboard HP USB Antimicrobial Mouse for all Added the whole section of AMD Radeon R7 240 2GB PCIe x16 HP USB Antimicrobial Keyboard and Mouse (China Only)
		Remove	Deleted "HP" from 128 GB Turbo Drive SSD (PCIe card)
		Changed	Change value in OpenGL 4.3, from .0 to .3
February 23, 2015	From v38 to v39	Addition	Processor support up to 84W (TWR/SFF), 65W (USDT), 35W (DM) added to "at a glance"
		Removed	Removed 160 GB SSD Non-SED from Solid State Drives (SSD) & Self-encrypting Solid State Drives (SED) Removed HP 160 GB Solid State Drive
March 16, 2015	From v39 to v40	Addition	Added a new value for "Power Supply" "DM"
March 24, 2015	From v40 to v41	Changed	Change the value in interface for "HP 500-GB 7200 RPM SATA 2.5" Self-Encrypting (SED) Hard Disk Drive"
April 6, 2015	From v41 to v42	Addition	added HP Desktop Mini DVD Super Multi-Writer ODD Expansion Module to Data Storage Drives and Accessories added HP Desktop Mini I/O Expansion Module to Input Devices
April 28, 2015	From v42 to 44	Addition	Added Intel® Core™ i3-4360T Processor Intel® Core™ i3-4170 Processor Intel® Core™ i3-4160 T Processor Intel® Pentium G3470 Processor Intel® Pentium G3460T Processor Intel® Pentium G3260 Processor Intel® Pentium G3250T Processor Added under Solid State Drives (SSD) & Self-encrypting Solid State Drives (SED) 128GB SATA 2.5 SSD TLC Non-SED (with 3.5" adapter when needed) 256GB SATA 2.5 SSD TLC Non-SED (with 3.5" adapter when needed) 512GB SATA 2.5 SSD Non-SED (with 3.5" adapter when needed) Added under NETWORKING/COMMUNICATIONS Intel 7260 802.11 ac PCIe x1 BT NIC Added chart for HP 256 GB* (non-SED) TLC Solid State Drive, HP 128 GB* (non-SED) TLC Solid State Drive HP 512 GB* (non-SED) TLC Solid State Drive and Intel® 7260 802.11ac PCIe x1 BT
May 20, 2015	From v44 to v45	Addition	Added an "X" mark to Solenoid Hood Lock / Sensor under USDT/DM
June 17, 2015	From v45 to v47	Addition	Added SKU number for HP USB to Serial Adapter under stands and accessories
July 6, 2015	From v47 to v48	Addition	Added new Storage

Summary of Changes

		Changed	Changed Operating System
October 8, 2015	From v48 to v49	Added	Added note about AMD and NVIDIA graphics cards are not available for Windows 10
November 30, 2015	From v49 to v50	Deleted	Deleted TWR under technical specifications.
December 9, 2015	From v50 to v51	Added	Max resolution to Intel Celeron Procesors
March 7, 2016	From v51 to v52	Added	256GB SATA 2.5" Non-SED Solid State Drive
April 18, 2016	From v52 to v53	Added	This product has obtained a Korea KCC EMC certificate.