




COMMERCIAL DISPLAYS
SW-014


Key Features

Industry standard architecture | Deployment flexibility | Greater simplicity | Streamlined content management | Integrated layout tool

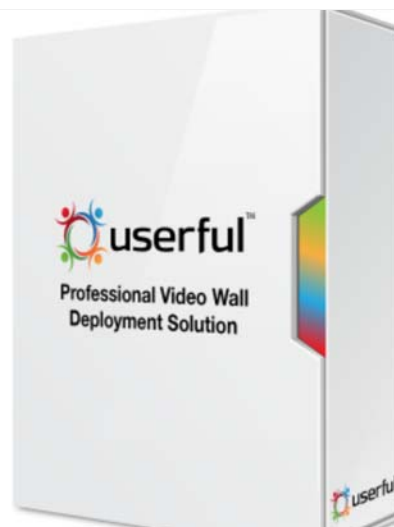

Product Description

Featuring Userful video wall controller software and a ViewSonic zero client media player, the Professional Video Wall Deployment Solution delivers stunning digital signage at a great price. With an integrated drag-and-drop management tool, the intuitive software allows virtually anyone to configure a video wall with just a smartphone. Content can be easily pushed to multiple displays (1 license per display) in any landscape or portrait grid formation, while color consistency can be calibrated across all displays. Because a standard PC and a standard LAN can be used to deliver the video wall, the amount of specialized knowledge, equipment installers, and support teams is reduced, thereby allowing for low upfront costs, easy set-up, and little to no maintenance. Enjoy 6K video, live TV, real-time camera feeds, full-screen web browser, and more. In addition to video walls, this professional solution can simultaneously support touch screens, desktops, self-serve kiosks, and individual digital signs. Content can be displayed with multiple CMSs, while a built-in playlist makes playback a breeze. By simply plugging in more zero clients, the number of displays on a network can be expanded for bigger impact on a larger scale.

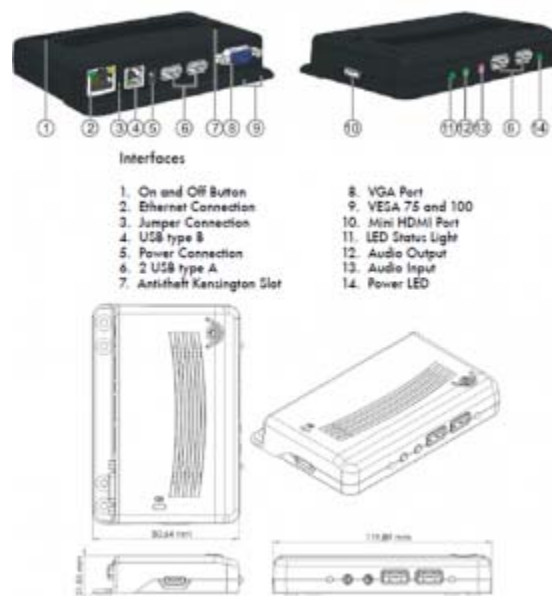

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Dimensions (imperial) (WxHxD):

Physical (in.): 9.0 x 1.6 x 5.9

Physical Without Stand (in.): 4.7 x 0.9 x 3.2

Dimensions (metric) (WxHxD):

Physical (mm): 230 x 40 x 150

Physical Without Stand (mm): 120 x 22 x 82

Weight (metric):

Net (kg): 100g

Gross (kg): 250g

Weight (imperial):

Net (lbs): 0.22

Gross (lbs): 0.55

General:

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Regulations: CE, CD LVD/ FCC class B

PACKAGE CONTENTS: Power adapter x 1, miniHDMI to HDMI adapter cable x 1, USB-A to DC power adapter x 1, Starting guide x 1

Warranty: One-year limited warranty on parts and labor

UPC: 766907819618

Connector:

Mini HDMI(1), USB 2.0(4), 3.5mm Audio Out(1), 3.5mm Audio In(1), Ethernet LAN (RJ45)(1), VGA(1), Kensington Lock Slot(1)

Power:

Consumption (typical): 2.4W

Operating Conditions:

Temperature: 41-113° F (5 - 45° C)

Humidity (non-condensing): 10-93%

Accessories:

CDE6510, CDE6510-S, CDE7500, CDE8600, CDM4300R, CDM4300T, CDM4900R, CDM5500R, CDM5500R-S, CDM5500T, CDX4650-L, CDX4650-L-R, CDX4952, CDX5552, CDX5552-R, CDX5552-S, CDX5562, SW-037