


ēlo

**E-Series
Touchscreen
Computer**



Company Overview

We know touch. In fact, we invented the touchscreen over 40 years ago and haven't stopped since. Every 57 seconds, a new Elo touchscreen is installed somewhere in the world. We obsess over details to exceed the highest quality standards. Our product portfolio includes one of the broadest selections of interactive touchscreen displays from 10-70 inches, touchscreen monitors, all-in-one touchscreen computers as well as touchscreens component and controllers. Most people have used an Elo touchscreen in a gaming machine, interactive kiosk, hospitality system, point-of-sale terminal, wayfinder display, interactive retail display or transportation application—just to name a few!

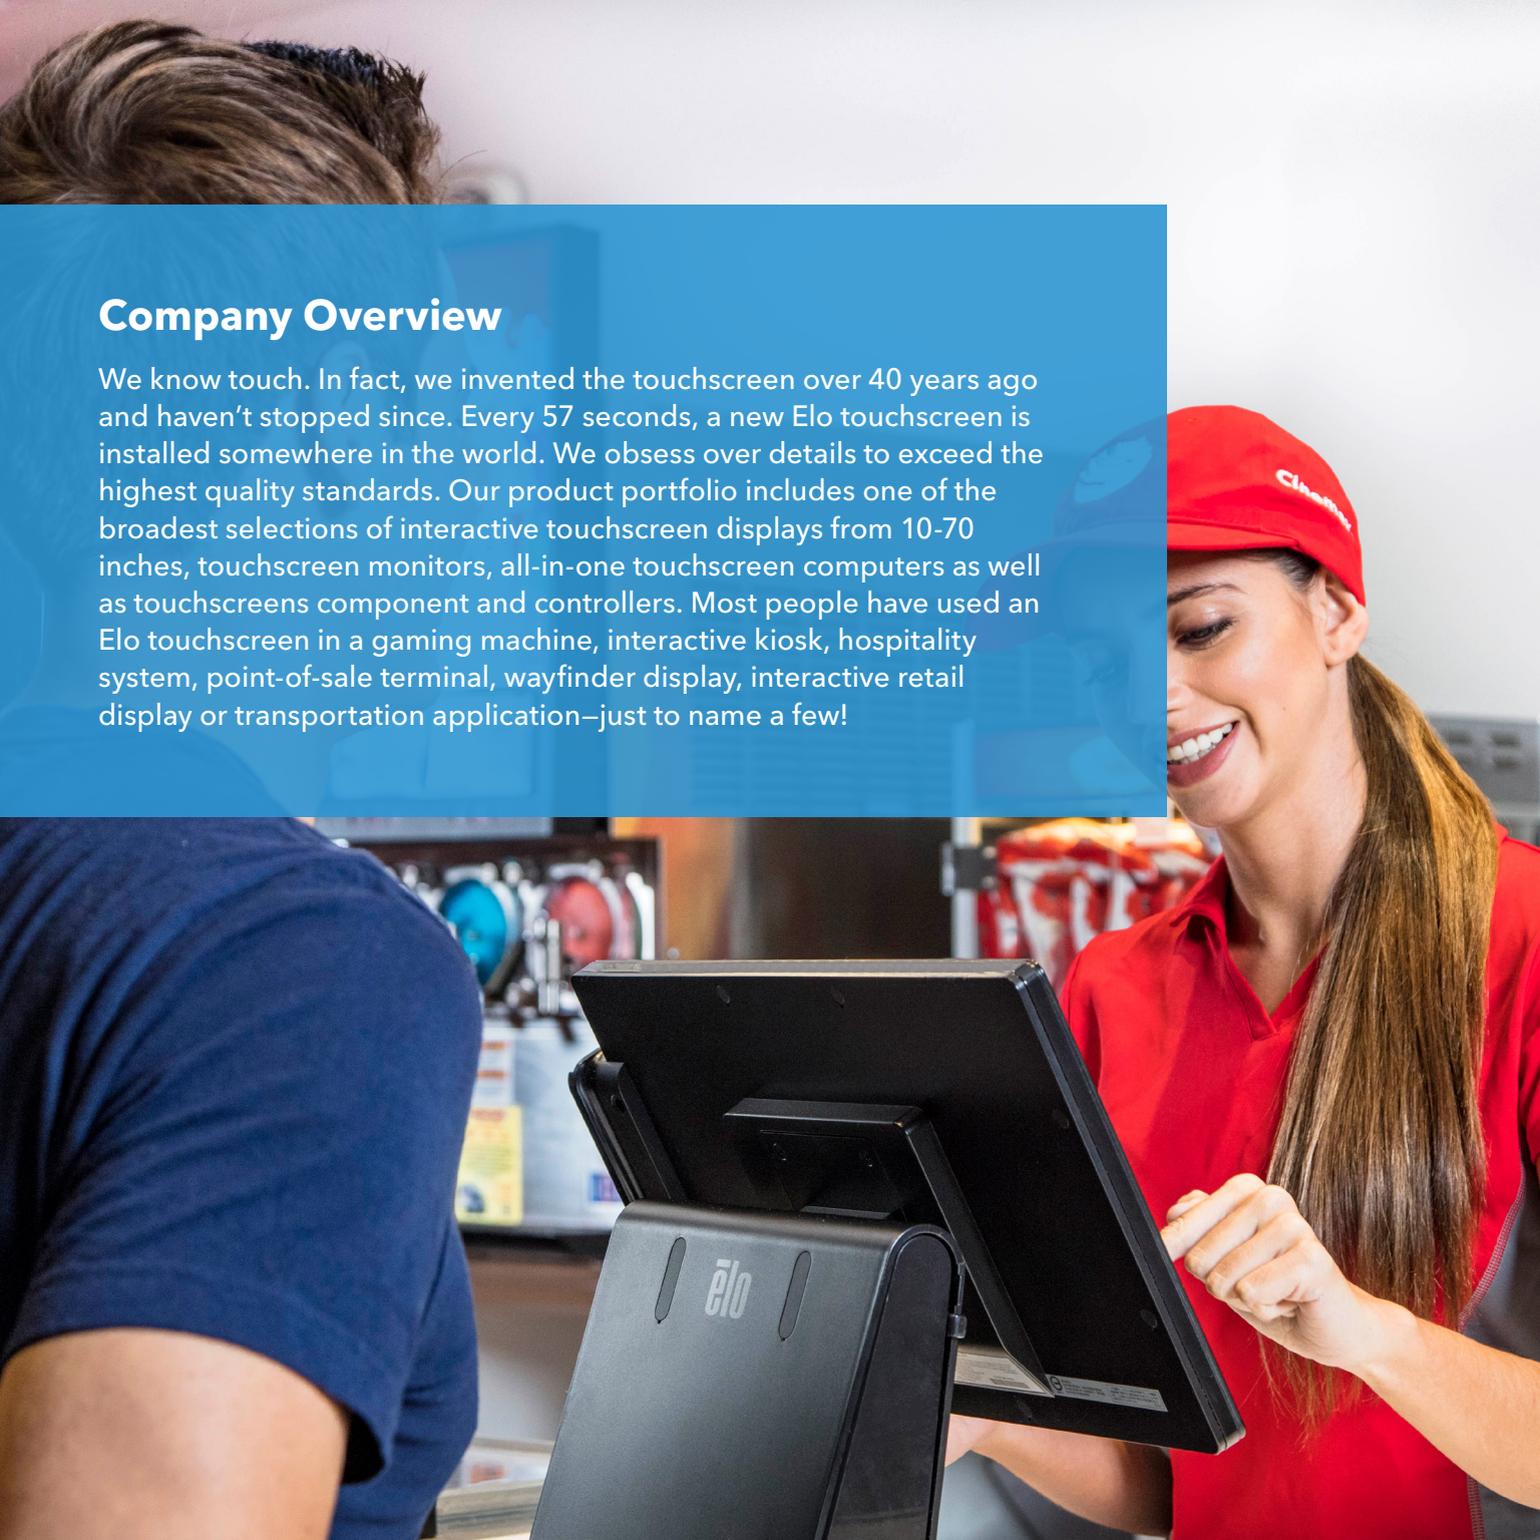



Sleek & Functional Design

With a rugged design and fan-less operation, the E-Series is ideally suited for use in any retail or hospitality environment. Available in standard aspect 4:3 (15E3) or widescreen aspect 16:9 (15E2) sizes.





1

Commercial-Grade

Rugged design and fanless operation backed by a three year warranty

2

Touch Ready

Available with Elo's leading touchscreen technologies

3

Seamless

Edge-to-edge glass design

4

Flexible Mounting

Removable base plate for wall mount

5

Connectivity

4 USB, 2 serial ports, VGA, 1 Ethernet

6

Accessories

Optional MSR, customer facing displays, rear facing display mount and wall mount

E-Series Product Specifications

| | 15E2 | 15E3 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Display | 15.6" diagonal | 15" diagonal |
| Aspect Ratio | 16:9 (widescreen) | 4:3 (standard) |
| Active Display Area | IntelliTouch® ZB: 13.6" x 7.6" / 344.2mm x 193.5mm AccuTouch®: 13.7" x 7.8" / 348.2mm x 197.5mm | TouchPro™ PCAP: 12.17" x 9.18" / 309.1mm x 233.1mm AccuTouch: 12.09" x 9.10" / 307.1mm x 231.1mm |
| Dimensions | 15.4" x 13.0" x 6.3" / 390mm x 330mm x 161mm | 14.1" x 13.8" x 6.1" / 358mm x 351mm x 156mm |
| Brightness (typical) | LCD panel: 220 nits IntelliTouch ZB: 198 nits AccuTouch: 176 nits | LCD panel: 350 nits TouchPro PCAP: 315 nits AccuTouch: 280 nits |
| Response Time | 10 msec | 8 msec |
| Viewing Angle (typical) | Horizontal: ±45° or 90° total Vertical: 20°/45° or 65° total | Horizontal: ± 80° or 160° total Vertical: 70°/80° or 150° total |
| Contrast Ratio (typical) | 600:1 | 800:1 |
| Processor | Intel Celeron J1900 Quad-Core 2 GHz (up to 2.42 GHz) | |
| Memory (RAM) | 4GB DDR3L SODIMM on 1 of 1 slot | |
| Storage | 128GB 2.5" 7mm SATA SSD1 | |
| I/O Ports | 4 x USB 2.0, 2 x Native DB9 RS-232, 1 x LAN RJ45 (Gigabit), VGA out, 1 x 3.5mm line out, 1 x 3.5mm line in, 1 x 3.5mm mic in | 4 x USB 2.0, 2 x Native DB9 RS-232, 1 x LAN RJ45 (Gigabit), VGA out, 1 x 3.5mm line out, 1 x RJ12 cash drawer (EPSON pinouts) |
| Other Features | Serviceable internal components, Threaded holes on bottom of base for mounting, Removable base, Kensington security lock | |
| Accessories | Magnetic stripe reader (MSR), customer facing displays, rear facing display mount, wall mount | |



EloTouch.com

Elo reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo, the Elo logo, AccuTouch, IntelliTouch and TouchPro are either trademarks or registered trademarks of Elo Touch Solutions, Inc. All other trademarks are the property of their respective owners. © 2017 Elo Touch Solutions, Inc. All rights reserved. 17073AEB00034