

24" (23.8" Viewable) Professional Monitor with SuperClear® IPS Panel

ViewSonic® See the difference® 

Ultimate Screen Precision for Color-Critical Applications

VP2468



Engineered to deliver unmatched color accuracy crucial for professional applications, the ViewSonic® VP2468 monitor displays your work with the vivid and lifelike color it deserves. With an edge-to-edge SuperClear® IPS panel and one of the world's thinnest bezels, the VP2468 provides a sleek and frameless viewing experience ideal for multi-monitor setups. For simple, single-cable daisy chaining of multiple monitors, the VP2468 is equipped with future-proof DisplayPort technology, in addition to HDMI ports. To ensure precise, uniform color, each of our monitors is factory calibrated to deliver an amazing Delta E_{s2} value for superior color accuracy. An integrated color uniformity function ensures consistent chromaticity across the screen, while a 14-bit 3D look-up table generates a stunningly smooth palette of 4.39 trillion colors. Add to that 6-axis color adjustment functionality, and this monitor provides the ultimate color processing capability for professional applications. Hardware calibration is also available with the optional ViewSonic Colorbration Kit, which allows you to quickly and easily calibrate the monitor for photography, graphic design, content creation, and other color-critical applications.

Key Features:


- Seamless viewing experience
- Loaded with connectivity
- Ultimate color accuracy and screen uniformity
- Professional color processing capability
- Versatile color adjustability

Designed for:

- Photography
- Content Design and Development
- Advertising and Marketing

24" (23.8" Viewable) Professional Monitor with SuperClear® IPS Panel

VP2468

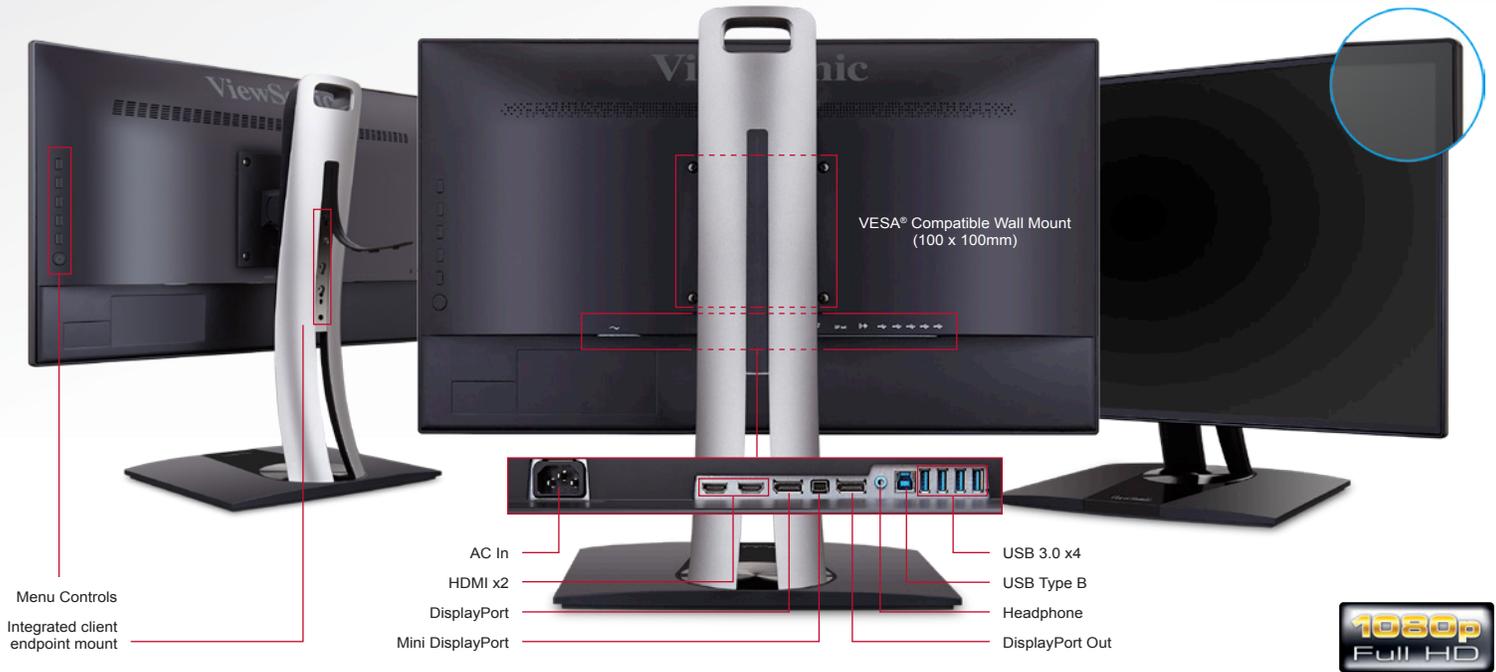

Specifications

LCD PANEL	Type	Color Active Matrix TFT LCD		POWER	Voltage	AC 100–240V (universal), 50 / 60Hz
	Display Area	20.75" horizontal x 11.7" vertical; 23.8" diagonal			Consumption	22W (typ.)
	Optimum Resolution	1920x1080			Optimize	19W (typ.)
	Brightness	250 cd/m ² (typ.)			Conserve	17W (typ.)
	Contrast Ratio	1,000:1 (typ.)		ERGONOMICS	Tilt	Forward 5°, Back 21°
	Dynamic Contrast Ratio	20,000,000:1			Swivel	±60°
	Viewing Angles	178° horizontal, 178° vertical			Height	0–5.1" / 0–130mm
	Colors	16.7M (6bit + A-FRC)			Pivot	0–90°
	Response Time	5ms (GTG)		OPERATING CONDITIONS	Temperature	32–104° F (0–40° C)
	Backlight	White-light LED			Humidity	20–90% (non-condensing)
	Backlight Life	30,000 hours (min.)		DIMENSIONS (W x H x D)	Physical with stand	21.2 x 20.5 x 8.5 in. / 538.7 x 519.5 x 215 mm
	Panel Surface	Anti-glare, hard-coating (3H)			Physical without stand	21.2 x 12.2 x 1.9 in. / 538.7 x 310.5 x 48.1 mm
					Packaging	25.6 x 16.2 x 10.6 in. / 650 x 412 x 270 mm
VIDEO INPUT	Digital	HDMI, DisplayPort		WEIGHT	Net with Stand	12.5 lb. / 5.7 kg
	Frequency	Fh: 15–90kHz, Fv: 24–75Hz			Net without Stand	7.0 lb. / 3.2 kg
	Sync	Separate Sync			Gross	17.1 lb. / 7.75 kg
COMPATIBILITY	PC	Up to 1920x1080 non-interlaced		WALL MOUNT	VESA compatible	100 x 100mm
	Mac®	Up to 1920x1080		REGULATIONS		CB, CE, WEEE, RoHS, ErP, REACH, UL, FCC-B, Mexico CoC, EPEAT GOLD, ENERGY STAR, Mexico Energy
CONNECTOR	Video In	HDMI 1.4 (x2), DisplayPort 1.2, Mini DisplayPort 1.2		RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
	Video Out	DisplayPort 1.2		WARRANTY		Three-year limited warranty on parts, labor and backlight
	Headphone	3.5mm mini jack				
	USB	USB 3.0 (x4), USB Type B				
	Power	3-pin plug (CEE22)				
CONTROLS	Front Panel Buttons	Power, 1, 2, 3, 4, 5				
	OSD	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu (See user guide for complete OSD functionality)				

Optional Accessories

Mini DisplayPort to DisplayPort Cable 6FT	CB-00010958
DisplayPort to DisplayPort Cable 6FT	CB-00010555
HDMI to HDMI cable 6FT	CB-00009950
Desktop Display Wall Mount Kit	LCD-WMK-001
Calibration Kit	CS-xR1

What's in the box?

VP2468 monitor, Power cable, Mini DisplayPort to DisplayPort cable, USB 3.0 Cable, Quick Start Guide, ViewSonic Wizard CD



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.