



MAXIMUM SECURITY



PARENTAL CONTROL



DESIGNED FOR
ADSL



WIRELESS G ADSL2+ MODEM ROUTER

HIGH-SPEED ADSL2/2+ INTERNET CONNECTION

Latest ADSL2/2+ standards provide Internet transmission of up to 24Mbps downstream, 1Mbps upstream

ALL-IN-ONE SINGLE BOX SOLUTION

Built-in ADSL interface, 54Mbps Wireless LAN, 4-port Ethernet Switch, QoS and Firewall protection, all in one single desktop box

TOTAL COMPATIBILITY & EASE OF USE

Works with all major Internet Service Providers, supports UPnP, easily installable by home and office users



ULTIMATE INTERNET CONNECTION

The DSL-2640B wireless ADSL router is an affordable high-performance ADSL router for home and the small office. With integrated ADSL2/2+ supporting up to 24Mbps download speed, 802.11g wireless LAN, firewall protection, Quality of Service (QoS) and 4-port switch, this router provides all the essentials that a home or small office needs to establish a secure and high-speed remote link to the outside world.

AFFORDABLE HIGH-SPEED CONNECTION FOR HOME & SMALL OFFICE

Designed as a very affordable high-performance ADSL router for home and SOHO users, the DSL-2640B provides not only the low-cost, high-speed Internet connection, but also the security and Quality of Service (QoS) required by users in today's high-risk and versatile Internet environments.

READY WIRED & WIRELESS LAN CONNECTION

The DSL-2640B provides an integrated 802.11g WLAN interface supporting wireless speeds of up to 54Mbps and interoperability with 802.11b wireless devices on the 2.4GHz frequency band. It also provides four 10/100Mbps Ethernet switch ports for ready workstations connection. These built-in functions save you the cost and trouble of installing a separate wireless access point and an Ethernet switch.

FIREWALL PROTECTION & QoS



Security features prevents unauthorized access to the home and office network from Internet intruders. The router provides firewall security using Stateful Packet Inspection (SPI) and Denial of Service (DoS) attack protection. SPI inspects the contents of all incoming packet headers before deciding what packets are allowed to pass through. Router access control is provided with packet filtering based on port and source/destination MAC/IP addresses. For Quality of Service (QoS), the router supports multiple priority queues to enable a group of home or office users to experience the benefit of smooth network connection of inbound and outbound data without concern of traffic congestion. This QoS support allows users to enjoy high ADSL transmission for applications such as VoIP, streaming multimedia and on-line games over the Internet.

WHAT THIS PRODUCT DOES

This wireless ADSL router connects to the Internet using an integrated high-speed ADSL2/2+ interface. Multiple computers at home or the office can share the high-speed Internet connection. The router provides firewall protection and QoS for secure and smooth on-line games, voice communication and download of photos, files, music and video over the Internet. Built-in 802.11g wireless LAN provides ready connection for wireless users, while 4 Ethernet ports provide connection to computers through the Ethernet cables

GET HIGH-SPEED ADSL SPEED

Ready ADSL connection with up to 24Mbps downstream and 1Mbps upstream. Watch TV, listen to live music and broadcast on the Internet, play games and experience clear Internet phone calls. Now, smooth streaming multimedia and VoIP voice are possible at home and in the office through a simple connection to this router.

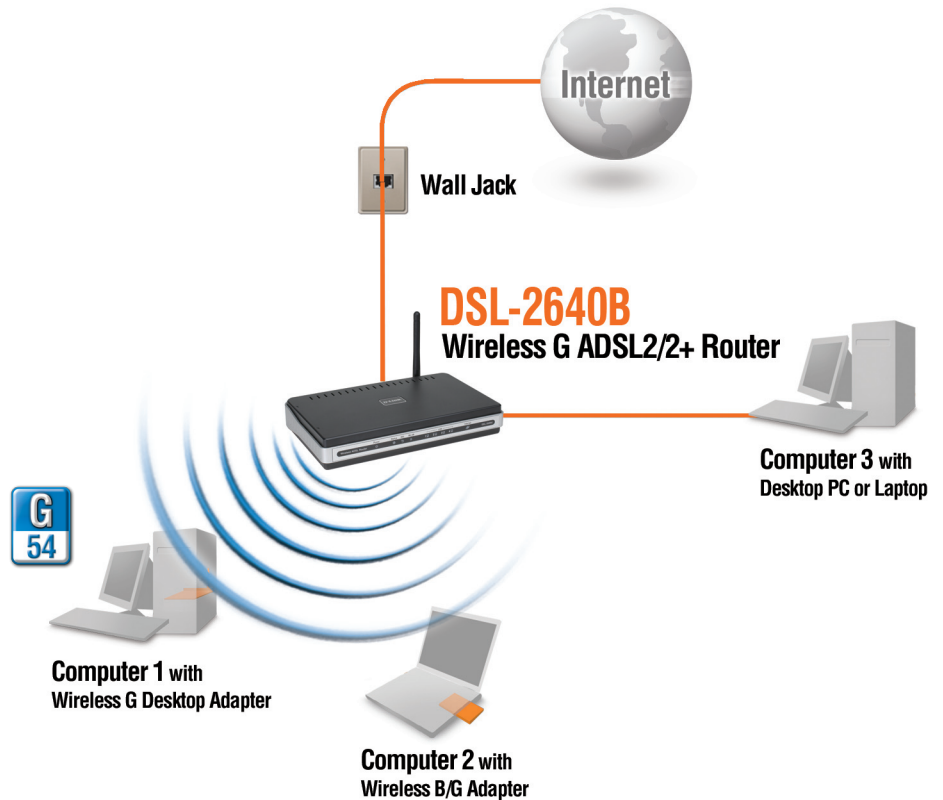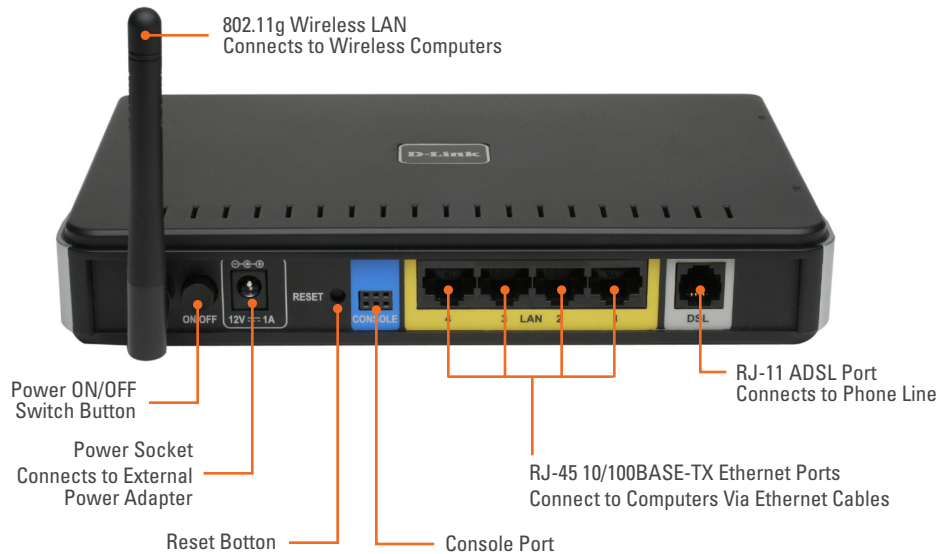

TECHNICAL SPECIFICATIONS

DEVICE INTERFACES

- + 1 RJ-11 ADSL port
- + 4 RJ-45 10/100BASE-TX Fast Ethernet LAN switch ports with auto MDI/MDIX
- + Built-in 802.11g WLAN
- + Console port

WIRELESS LAN

- + IEEE 802.11g standard
- + Frequency range: 2.4 GHz to 2.484 GHz
- + Wireless speed: up to 54Mbps
- + 64/128-bit WEP data encryption
- + Multiple SSID
- + MAC-based ACL
- + WPA/WPA2 security with TKIP, AES support
- + 802.11e WLAN QoS (WMM/WME)

ADSL STANDARDS

- + ADSL: Full-rate ANSI T1.413 Issue 2, ITU-T G.992.1 (G.dmt) Annex A, ITU-T G.992.2 (G.lite) Annex A, ITU-T G.994.1 (G.hs)
- + ADSL2: ITU-T G.992.3 (G.dmt.bis) Annex A/L/M, ITU-T G.992.4 (G.lite.bis) Annex A
- + ADSL2+: ITU-T G.992.5 Annex A/L/M

ADSL DATA RATES

- + G.dmt: 8Mbps downstream, 832Kbps upstream
- + G.lite: 1.5Mbps downstream, 512Kbps upstream
- + ADSL2: 12Mbps downstream, 1Mbps upstream
- + ADSL2+: 24Mbps downstream, 1Mbps upstream

ATM & PPP PROTOCOLS

- + Multiple protocol encapsulation over AAL5
- + Bridged and routed Ethernet encapsulation
- + Logical Link Control (LLC) encapsulation
- + VC-based multiplexing
- + ATM Forum UNI3.1/4.0 PVC
- + ATM Adaptation Layer Type 5 (AAL5)
- + ITU-T I.610 OAM F4/F5 loopback
- + ATM QoS (Traffic Shaping)
- + PPP over ATM
- + PPP over Ethernet

NETWORK PROTOCOLS AND FEATURES

- + IP Static Routing
- + RIP
- + NAT
- + Virtual Server, Port Forwarding
- + DHCP server/client/relay
- + DNS Relay, DDNS
- + IGMP proxy
- + SNTP

FIREWALL/ACCESS SECURITY

- + NAT firewall
- + MAC Filtering
- + Packet Filtering (IP/ICMP/TCP/UDP)
- + Stateful Packet Inspection (SPI)
- + Denial of Service (DoS) prevention
- + Intrusion Detection System and logging
- + DMZ

VPN

- + Multiple IPSec/PPTP/L2TP pass-through

QoS

- + Traffic Prioritization/Classification based on:
 - Port
 - 802.1p Priority Queues
 - Application port
 - User-defined (TCP/UDP/ICMP etc.)
- + 3 priority queues per PVC
- + PVC/VLAN port mapping
- + IGMP v.2 snooping

CONFIGURATION/MANAGEMENT

- + Quick Installation Wizard
- + Web-based GUI
- + Web-based/TFTP firmware upgrade, configuration up/download
- + UPnP
- + SNMP v1, v2c, built-in MIB-I, MIB-II agent
- + TR-069 compliant (optional)
- + Factory reset button

DIAGNOSTIC LEDS

- + Power
- + Status
- + DSL
- + WLAN
- + LAN 1 to LAN 4
- + Internet

POWER

- + Power input: through 12VDC/1A, 100 to 120VAC 50/60Hz or 200 to 240VAC 50/60Hz external AC power adapter
- + Power ON/OFF switch
- + Dying Gasp support

DIMENSIONS

196 mm (L) x 121 mm (W) x 32 mm (H)
(7.72 x 4.76 x 1.26 inches)

WEIGHT

327 grams (0.72 lb)

OPERATING TEMPERATURE

0° to 40° C (32° to 104° F)

STORAGE TEMPERATURE

-20° to 65° C (-4° to 149° F)

OPERATING HUMIDITY

5% to 95% non-condensing

Emission (EMC/EMI)

- + FCC Part 15 Class B
- + CE (EN55022/EN55024/EN300 328/EN301 489)

Safety

- + CSA
- + LVD
- + RoHS compliant

Driver Languages Supported



































D-Link Worldwide Offices

U.S.A	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Spain	TEL: 34 93 409 0770	FAX: 34 93 491 0795	Iran	TEL: 90-212-289-5659	FAX: 90-212-289-7606
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Portugal	TEL: 351 21 8628493	FAX: 351 21 8622492	Pakistan	TEL: 92-21-454-8158	FAX: 92-21-453-5103
Europe (U. K.)	TEL: 44-20-8955-9000	FAX: 44-20-8955-9001	Greece	TEL: 30 210 9914 512	FAX: 30 210 9916902	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Czech Republic	TEL: 420 224 247 500	FAX: 420 224 234 967	Latin America	TEL: 56-2-5638-950	FAX: 56-2-5638953
France	TEL: 33 1 30 23 86 88	FAX: 33 1 30 23 86 89	Hungary	TEL: 36 (0) 1 461 30 00	FAX: 36 (0) 1 461 30 04	Brazil	TEL: 55-11-2185-9300	FAX: 55-11-2185-9322
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	Poland	TEL: 48 (0)22 583 92 75	FAX: 48 (0)22 583 92 76	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Belgium & Luxemburg	TEL: 32 (0)2 517 7111	FAX: 32 (0)2 517 6500	Bulgaria	TEL: 359 2 958 22 42	FAX: 359 2 958 65 57	Russia	TEL: 7-495-744-0099	FAX: 7-495-744-0099
Switzerland	TEL: 41 (0)1 832 11 00	FAX: 41 (0)1 832 11 01	Romania	TEL: 40(0)21 320 23 05	FAX: 40(0)21 320 23 07	Japan	TEL: 81-3-5761-0963	FAX: 81-3-5761-0965
Austria	TEL: 43 (0)1 240 27 270	FAX: 43 (0)1 240 27 271	Singapore	TEL: 65-6774-6233	FAX: 65-6774-63225	Korea	TEL: 82-2-890-5491	FAX: 82-2-890-549
Sweden	TEL: 46 (0)8 564 619 00	FAX: 46 (0)8 564 619 01	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868	China	TEL: 86-10-58635800	FAX: 86-10-58635799
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	India	TEL: 91-22-2652 6696	FAX: 91-22-2652 8914	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-3339
Norway	TEL: 47 99 300 100	FAX: 47 22 30 90 85	Middle East (Dubai)	TEL: 971 4-391-6480	FAX: 971 4-390-8881	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898
Finland	TEL: 358-10 309 8840	FAX: 358-10 309 8841	Egypt	TEL: 202-291-9035	FAX: 202-291-9051			
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Turkey	TEL: 90-212-289-5659	FAX: 90-212-289-7606			