

## **Specifications**

# **SMART** Board® 6075 interactive flat panel

**Model SPNL-6075** 

#### Overview

The SMART Board® 6075 interactive flat panel features SMART's proprietary DViT® (Digital Vision Touch) technology and combines a premium touch experience with the power of SMART Notebook® collaborative learning software on a 75" LED display. For simple and powerful digital whiteboarding, this interactive flat panel is also SMART kapp iQ™ enabled.

The 4K ultra-high-definition resolution display provides optimal image clarity and wide viewing angles. With the new Pen  $ID^{\infty}$  feature, you can assign different appearances to either pen and write or draw over any application in digital ink.


Object Awareness allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and two users can write or draw at the same time.





# Dimensions and weights<sup>1</sup>

# **Dimensions**

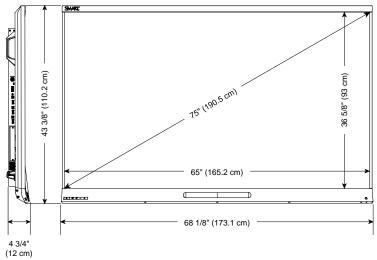

# Weight

185 lb. (84 kg)

#### Shipping dimensions (including pallet)

75 3/8" × 54 3/8" × 14" (191.6 cm × 138 cm × 35.5 cm)

#### **Shipping weight**

238 lb. (108 kg)

 $<sup>^{1}</sup>$ All dimensions  $\pm$  1/8" (0.3 cm). All weights  $\pm$  2 lb. (0.9 kg).

#### Hardware

#### Interaction

Touch technology DViT technology

Multitouch capabilities

4 touches on Windows® and Mac computers

Gesture support Windows 7, Windows 8 and Windows 10 operating systems

OS X 10.9, 10.10 and 10.11 operating system software

Object awareness Functionality automatically adjusts depending on the tool or object being used, whether it's

a pen, finger, eraser or palm.

Pen ID Two people can write independently and simultaneously, using different colored ink.

Display

Type LED

Aspect ratio 16:9

Optimal resolution 3840 × 2160 at 30 Hz (HDMI®) or 60 Hz (DisplayPort)

HDM

Horizontal frequency 122–140 kHz (typically 135 kHz)

Vertical frequency 47–63 Hz (typically 60 Hz)

Contrast ratio (typical) 1200:1

Brightness (typical) 280–360 cd/m<sup>2</sup>

Pixel pitch 0.429 mm × 0.429 mm

Gamut 72% of NTSC

Viewing angle 178°

Response time 9 ms (typical)

12 ms (maximum)

**Presence detection** Presence detection sensor on the bottom frame

**Audio** 2 10 W integrated side-firing speakers

Noise level <35 dbA

Included cables and accessories

8' (2.4 m) country-specific power cable

16' 5" (5 m) USB cable $^2$ 

Pen (×2)

**Mounting holes** For a standard VESA $^{\circ}$  600 mm  $\times$  400 mm mounting plate

13 3/4" (34.9 cm) from the bottom of the interactive flat panel

Mounting bracket

depth

Minimum depth of 15/8" (4.2 cm) for all components on the back of the interactive flat panel

to clear the wall

 $<sup>{}^2{\</sup>rm HDMI\,cable\,not\,included\,(See}\,{\it Installation\,requirements}\, for\, {\rm HDMI\,cable\,requirements.)}$ 

#### Connectors

Side Side connector panel: Accessory slot:

USB 2.0 Type-B (×3) HDMI 1.4 in HDMI 1.4 in (×2) DisplayPort in DisplayPort in

Stereo 3.5 mm out RS-232 in

Bottom USB 2.0 Type-A

**Back** AC power inlet

# Installation requirements

Interactive flat panel See the SMART Board 6000 series interactive flat panels administrator's guide

(smarttech.com/kb/170641)

#### Room computers and guest laptops

General requirements See smarttech.com/SMARTNotebookReleaseNotes

4K UHD Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5

memory

See kb.smarttech.com/?q=15546

HDMI cable HDMI 1.4 compliant or better

Maximum recommended passive length of 25' (7.6 m)

Mini-computers

General requirements See smarttech.com/SMARTNotebookReleaseNotes

Dimensions Smaller than 10"  $\times$  10"  $\times$  2" (25.4 cm  $\times$  25.4 cm  $\times$  5.1 cm)

Weight Less than 10 lb. (4.5 kg)

Mounting VESA 75 mm  $\times$  75 mm or 100 mm  $\times$  100 mm mounting pattern

### Storage and operating requirements

**Power requirements** 100V to 240V AC, 50 Hz to 60 Hz

#### Power consumption at 77°F (25°C)

Standby mode 1.7 W

Normal operating 180 W

Maximum operating 350 W

Operating temperature 41–95°F (5–35°C)

Storage temperature -4–140°F (-20–60°C)

**Humidity** 5–80% relative humidity, non-condensing

# Certification and compliance

Regulatory certification UL (U.S./Canada), FCC, IC, EMC, LV, VCCI, PSE, KC Mark

**Environmental compliance** 

European Union REACH, RoHS, WEEE and Packaging

U.S. Packaging and Conflict Minerals

# Purchasing information

Order numbers

SPNL-6075 SMART Board 6075 interactive flat panel, including a SMART Notebook software license key

**Optional accessories** 

UGK-KAPPIQ-AM30 SMART kapp iQ appliance for SMART Board 6000 series interactive flat panels

Other See smarttech.com/accessories

Warranty Two-year limited equipment warranty

Extended warranty TBD

smarttech.com/support smarttech.com/contactsupport

© 2016 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, SMART kapp iQ, DViT, Pen ID, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. HDMI and all associated logos are trademarks of HDMI Licensing, LLC. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 02/2016.