

# 20" (19.5" viewable) Full HD 1080p LED Multimedia Monitor

Stunning Color Performance with SuperClear® MVA Technology

**VA2055Sm**



If you're looking for stunning color at a great value, look no further than the ViewSonic® VA2055Sm monitor. Designed with SuperClear MVA technology, this 20" (19.5" viewable) monitor delivers incredibly brilliant color at almost any viewing angle. And we didn't stop there, our proprietary ViewMode™ feature lets you select the optimal screen setting for different applications, while Flicker-free and Blue Light filter technology eliminates eyestrain so you can work or play for extended periods of time. Featuring ENERGY STAR and EPEAT certification, the energy-saving VA2055Sm offers solid performance and great long-term value. Add dual 2W speakers with DVI and VGA inputs, and you have the ultimate multimedia experience.

#### **Key Features:**

Stunning color performance  
& wide-angle viewing

Full HD 1080p resolution

Superior color rendering  
& intuitive settings

Flexible connectivity

Dual integrated speakers

#### **Designed for:**

Home


Business

Education

# 20" (19.5" viewable) Full HD 1080p LED Multimedia Monitor



**VA2055Sm**

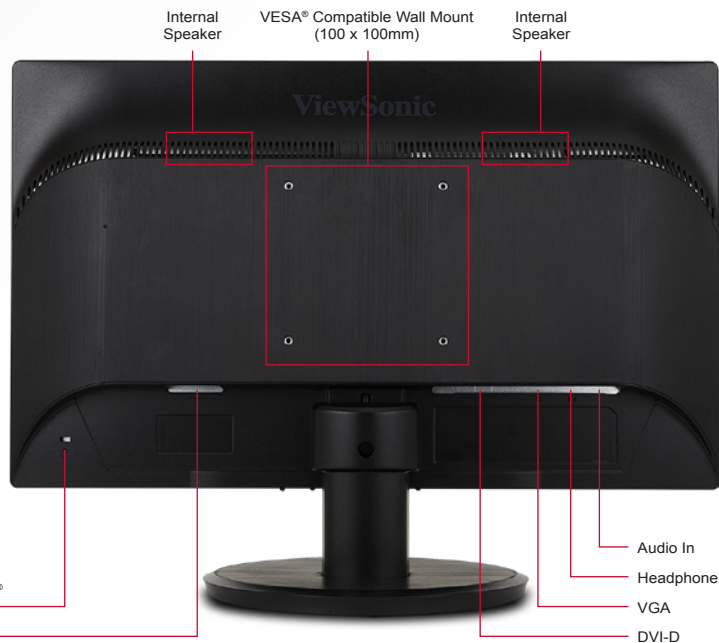

## Specifications

<b>LCD PANEL</b>	Type	Color Active Matrix TFT LCD
	Display Area	17.1" horizontal x 9.4" vertical; 19.5" diagonal
	Optimum Resolution	1920x1080
	Brightness	250 cd/m <sup>2</sup> (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (6bit + Hi-FRC)
	Response Time	25ms (GTG)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
<b>VIDEO INPUT</b>	Digital	VGA, DVI-D
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green
<b>AUDIO OUTPUT</b>	Speakers	2-watt (x2)
<b>COMPATIBILITY</b>	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
<b>CONNECTOR</b>	Video In	VGA, DVI-D
	Audio In	3.5mm mini jack
	Power	External power adapter
<b>CONTROLS</b>	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

<b>ERGONOMICS</b>	Tilt	Forward 6° / Back 22°
<b>POWER</b>	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	24W (typ.) / 35W (max.)
	Optimize	18W (typ.)
	Conserve	15W (typ.)
<b>OPERATING CONDITIONS</b>	Temperature	32~104° F (0~40° C)
	Humidity	20~90% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical with Stand	18.6 x 13.7 x 8.3 in. / 472.2 x 349.1 x 211.7 mm
	Physical without Stand	18.6 x 11.3 x 1.9 in. / 472.2 x 287.8 x 47.5 mm
	Packaging	20.9 x 15.9 x 4.3 in. / 531 x 405 x 110 mm
<b>WEIGHT</b>	Net with Stand	6.2 lb. / 2.8 kg
	Net without Stand	5.4 lb. / 2.5 kg
	Gross	8.8 lb. / 4.0 kg
<b>WALL MOUNT</b>	VESA	100 x 100mm
<b>REGULATIONS</b>		US NRTL w/CA (cULus/cTUVus/cETLus/cBVus), FCC-B w/ICES003, ENERGY STAR, Mexico, Mexico Energy, EPEAT Silver
<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state, or federal laws
<b>WARRANTY</b>		Three-year limited warranty on parts, labor and backlight

## Optional Accessories

HDMI to DVI Cable 6 Ft.....	CB-00008948
DVI-D to DVI-D Cable 6 Ft.....	CB-00008187
Desktop Display Wall Mount Kit.....	LCD-WMK-001

## What's in the box?

VA2055Sm monitor, Power cable, VGA cable, Quick Start Guide



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.