PJD5234L

Performs Better and Lasts Longer



Overview

ViewSonic's new PJD5 Series features DynamicEco Technology to automatically adjust lamp brightness and thereby extend lamp life to 10000 hours. Requiring only 0.5W power consumption in standby mode, the PJD5 series lowers the total ownership cost, making it a budgetfriendly option. This series has a slim and portable design that weighs less than 5 pounds. Boasting BrilliantColor™ technology, 3,000 lumens, and 15,000:1 contrast ratio, the PJD5 series delivers clear, crisp images and vivid, accurate colors, while supporting a variety of resolutions, to best meet the environmental requirements of any professional presentation. The HDMI connection, multiple video input options and integrated speakers in the PJD5 series provide flexible connections to a variety of devices. Additionally, the Off-to-Go mode, vertical keystone correction, and 144Hz/3D ready functions allow the operation of this projector series to be simple and efficient, making business presentations convenient, smart, and easy. The PJD5 series delivers value to you by fully utilizing every second.

Features



Hight brightness and contrast ration ensures the stunning image quality

The PJD5 series carries a variety of models with a versatile range

For more product information, visit us at www.viewsoniceurope.com





of resolutions to cater to specific image quality requirements. Each model will support 3,000 lumens brightness and 15,000:1 contrast, ensuring the image quality will remain crystal clear and vivid even

in the bright environments.

100% Normal DynamicEco™

DynamicEco Technology makes excellent energy conservation

ViewSonic's proprietary DynamicEco Technology will automatically adjust lamp brightness to render a longer projector lamp life and conserve up to 70% power consumption.



BrilliantColor™ technology delivers vivid color to the life


ViewSonic integrates BrilliantColor™ technology into the PJD5 series to construct digital colors that deliver stunning and vivid images. The advanced 6-segment color wheel enriches the performance of the yellow color and further augments overall color

reproduction to present defined picture quality.



10000-hours high performance long-life light bulbs

The energy-saving mode on the PJD5 series automatically adjusts the brightness, which extends the lamp light to up to 10,000 hours and saves on maintenance costs.

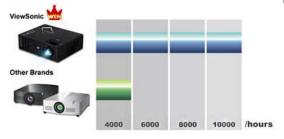

3D Propugation AND Propugation

3D Projection Ready HDMI 1.4 Input (only for PJD5134, PJD5234, PJD5234L, PJD5533w)

The 3D DLP® Link technology supports an image update frequency of 144Hz, allowing the projected image to be shown with a 3D stereoscopic effect. Along with HDMI 1.4, the PJD5 series brings supreme images onto a large screen.





Ultra-low power consumption in standby mode

The PJD5 series consumes only 0.5W in standby mode, saving ownership cost and practicing environmental friendliness.




Off-to-Go Mode saves your time

The efficient Off-to-Go mode on the PJD5 series enables quick shutdown and turn-on, saving every second of your valuable time. The PJD5 series takes only 3 seconds to turn on, while shutting down instantly and requiring zero power consumption to cool down the projector.



Easy vertical keystone correction

When projectors are tilted, the projection image aspect ratio may display rectangular images in a trapezoidal shape, resulting in image distortion. The PJD5 series offers +40°/-40° keystone correction to fix projected image distortion issues easily and quickly.

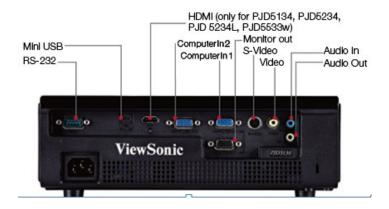

Technical Specifications

PACKAGE CONTENTS

PC	1024 x 768 @ 60Hz (Native)
Mac®	1024 x 768 @ 75Hz
Physical (mm)	268 x 221 x 84.4(W × D × H)
Physical (in)	10.55" x 8.70" x 3.32"(W × D × H)
	CB, UL, cUL, FCC (including ICES-003), CE, UL-Argentina, NOM, TUV-GS, GOST-R, SASO, Ukraine, PSB, C-Tick, Korean-KC, CCC, CECP, WEEE, RoHS
	Mac® Physical (mm)

For more product information, visit us at www.viewsoniceurope.com



1.8 Meter Power Cord *1, 1.8 Meter VGA Cable *1, Remote Control *1 with AAA Battery, Quick Start Guide (one sheet version) *1, ViewSonic CD Wizard (with user manual) *1, Warranty Card & Sticker (only for China) *1

AUDIO	Speaker	2W *2	
Com	Frequency	Horizontal: 15 ~ 100 kHz Vertical: 24 ~ 120 Hz	
	Computer and Video	NTSC M (3.58 MHz), 4.43MHz PAL (B, D, G, H, I, M, N, 60) SECAM (B, D, G, K, K1, L) 480i and 576i 480p and 576p	
		720p,1080i, 1080p	
CONNECTOR	Audio Out	3.5mm mini- Mono Jack *1	
	S-Video Input	Mini-Din 4 pin *1	
	HDMI (input)	1.4 x1	
	RS-232	DB-9 *1	
	Audio Input	3.5mm mini- Mono Jack *1	
	USB	Mini Type B	
	Component-In	Share with RGB *2	
	Composite Input	RCA *1	
	RGB Input	DB-15 *2	
	RGB Output	DB-15 *1	
POWER	Voltage	100V ~ 240Vac 50 / 60Hz	
	Consumption	250W (Max.)	
DISPLAY	Contrast Ratio	15,000:1(Max.)	
	Display size	24'' ~ 300'' (diagonal)	
	Aspect Ratio	4:3	
	Throw Distance	1.0M ~ 8M	
	Throw Ratio	1.86 ~ 2.04	
	Brightness	3,000 lm	
	Color Wheel	6-Seg RGBCYW	
	Keystone Correction	+40 ~ -40	
	Lamp life (Normal / Eco / Dynamic Eco)	5,000/6,000/10000 hours	
	Туре	TI DMD 0.55	



	Lamp Lens	OSRAM 1.1X
LANGUAGE		English, France, Spanish, Thai, Korea, Germany, Italian, Russian, Swedish, Dutch, Polish, Zech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic
WEIGHT	Net	4.63lbs (2.1kg)
OPERATING CONDITIONS	Humidity Temperature Altitude	10 ~ 90% (non- condensation) 32° ~ 104° F (0° ~ 40° C) 0 ~ 6,000 ft.

ViewSonic® Limited Warranty



ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.