

Multimedia Projector

LV-7490

you can



With 4000 lumens and 10W audio, the LV-7490 is a compact yet powerful projector.

At 4000 lumens, the LV-7490 is the brightest projector in the ultra-portable range. Native XGA resolution offers clear, sharp images, while the built-in 10W speaker offers powerful audio output.

XGA RESOLUTION
4000 LUMENS
2000:1 CONTRAST RATIO
1.2X ZOOM LENS
AUTO KEYSTONE CORRECTION
BUILT-IN 10W SPEAKER
6000 HOUR LAMP LIFE

Key features

- Native XGA resolution for crisp image detail
- 4000 lumens for ultra-bright images, even in well-lit environments
- High 2000:1 contrast ratio with lamp control, delivering deep blacks and vivid colours
- Canon wide-angle 1.2x zoom projection lens
- Easy to operate with Auto Input Search and Auto Vertical Keystone Correction
- Built-in audio with powerful 10W output, plus line-out terminal
- Eco-friendly operation: 6000 hour lamp life, 5500 hour filter life and less than 1W power consumption in standby (with network off and all in Eco mode)
- Direct Power On / Off
- Low noise: Just 29dBA in Eco Mode
- RJ-45 network port for remote monitoring and control

What's in the Box

LV-7490 Multimedia Projector, Remote Controller, AAA Batteries (x2), AC Mains Power Cable, VGA Computer Connection Cable, Lens Cap, PIN Code Label, Instruction Manual on CD-ROM, Important information and Quick Start Guide, Warranty Card, Carrying case

Dimensions (W x H x D)

350 x 97 x 262 mm

Weight

3.4 kg



PROJECTOR

Canon

LV-7490


Specifications



MULTIMEDIA PROJECTOR Product Class	Ultra-Portable
LCD PANEL Type Size and Number Aspect Ratio Native Resolution	Transmissive LCD, Poly-silicon TFT Active Matrix 0.63" diagonal with microlens, 3 panels 4:3 1024 x 768 (XGA), 786432 pixels
OPTICS Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift	245W NSHA F1.6 - F1.76; f=22.3 - 26.8mm 1.2x Manual Manual 9 : 1 (fixed)
IMAGE AND AUDIO Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Digital Zoom Magnification Keystone Correction Range Analogue RGB Compatibility Component Video Scan Systems Video / S-Video Colour Systems Display Modes Built-in Speaker	4000 lumens (2600 Lumens Eco mode) 85% 2000:1 (with lamp control) 1.4m - 12.7m (3.5m - 4.2m for 100" image) 40" - 300" (80 x 60cm - 610 x 457cm) Yes Vertical: +/- 30° (Auto / Manual) (WUXGA/UXGA/WXGA+/WXGA/WSXGA+/SXGA+/SXGA) / XGA / SVGA / VGA / MAC 1080i / 1035i / 720p / 575p / 575i / 480p / 480i PAL / PAL-M / PAL-N / NTSC / NTSC4.43 / SECAM Dynamic, Standard, Real, Cinema, Colour x 5 10.0W RMS, Monaural

PORTS AND CONNECTORS Analogue RGB Input 1 Analogue RGB Input 2 Analogue RGB Output S-Video Input Composite Video Input Audio Input 1 Audio Input 2 Audio Input 3 Audio Output Service Port / Projector Control Network Port	Mini D-Sub 15-pin (Component Video via optional cable / SCART-RGB via optional cable) Mini D-Sub 15-pin (Component Video via optional cable / SCART-RGB via optional cable) - (shared with RGB output) Mini D-Sub 15-pin - (Shared with RGB input 2) Mini DIN 4-pin RCA x1 3.5mm stereo mini-jack (input for RGB 1) 3.5mm stereo mini-jack (input for RGB 2 / Microphone) RCA x2 (L/R) (input for Video) 3.5mm stereo mini-jack (variable level) Mini D-Sub 9-pin (RS-232c) RJ-45
MECHANISMS Front Elevation Mechanism	2x Mechanical feet, 12° maximum image elevation
RATINGS Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Storage Environment Warranty	350mm x 97mm x 262mm 3.4kg 100V - 240V AC, 50/60Hz Normal Mode: 307W / Eco Mode: 216W Standby (LAN off): 0.9W Normal Mode: 34dBA / Eco Mode: 29dBA +5°C to +35°C -10°C to +60°C 3 years
All data is based on Canon's standard testing method. This Leaflet and the specifications of the product have been developed prior to the date of product launch. Specifications are subject to change without notice. ™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.	

Connectivity

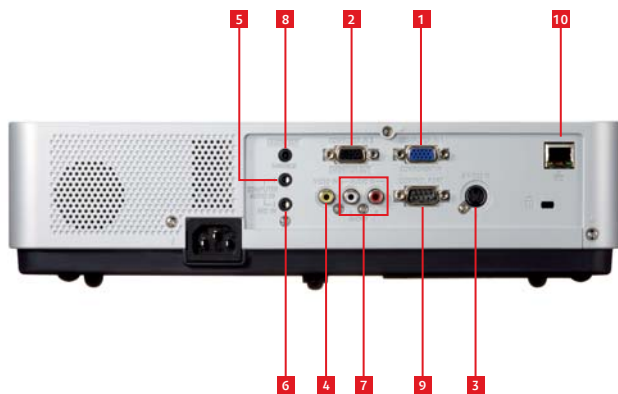

- 1 **Mini D-Sub 15-pin:** Analogue RGB Input 1 / Component Input (with optional adapter cable)
- 2 **Mini D-Sub 15-pin:** Analogue RGB Input 2 / Analogue RGB (Monitor) Output
- 3 **Mini DIN 4-pin:** S - Video Input
- 4 **RCA x1:** Composite Video Input
- 5 **3.5 mm mini-jack:** Stereo Audio Input 1 (for RGB input 1)
- 6 **3.5 mm mini-jack:** Stereo Audio Input 2 (for RGB input 2)
- 7 **RCA x2 (L/R):** Stereo Audio Input 3 (for S-Video input / Composite Video Input)
- 8 **3.5 mm mini-jack:** Stereo Audio Output (Variable level)
- 9 **Mini D-Sub 9-pin:** Control Port (RS-232c)
- 10 **RJ-45:** Network Connection



Canon Inc.
canon.com
Canon Europe
canon-europe.com

Canon Europe Ltd
3 The Square, Stockley Park
Uxbridge, Middlesex
UB11 1ET UK

English Edition
© Canon Europa N.V., 2011