


Clarity Matrix MX46HDU

LCD Video Wall System

The Clarity® Matrix™ MX46HDU-L with G2
Architecture is an ultra-narrow bezel 46" LCD video wall display that provides outstanding tiled visual performance, supports extended operation and requires minimal installation space. Designed for 24x7 operation, the Clarity Matrix MX46HDU-L features 800 nits brightness, LED backlight technology and Full HD resolution making it the ideal video wall for high-impact, mission-critical applications. The Clarity Matrix MX46HDU-L sets a new benchmark with a tiled bezel width as small as 3.7 mm, creating a near seamless digital canvas.

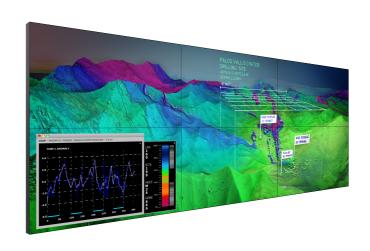

SPECIFICATION	DETAIL
Planar Part Number	997-7790-00
Technology	Commercial-grade direct view LCD
Diagonal	46 inches
Aspect Ratio	16:9
Native Resolution Panels	1920 x 1080
Tiled Bezel Width	3.7 mm
Brightness (typ)	800 cd/m² or nits
Response Time (typ)	8 ms
Contrast ratio (full field)	3500:1
Full viewing angle	178°
Backlight life (1/2 brightness)	50,000 Hrs
Mounted depth	3.6" wall to front of screen
Acoustic noise	Fanless operation
Heat load	520 BTU per hour at 800 nit
Operating temperature range	5 - 40 Degrees C
Operating humidity range	20-90% RH non-condensing
Backlight control	Individual and wall control
Backlight sensing and reporting	At display level
Display module position sensing	Auto-sensing integrated

Power Consumption (typ)	163 watts
Power supply voltage	100-230V AC ± 10%, 50 to 60 Hz
Power Status	Diagnostics LEDs, health monitoring and alerts
Safety regulations	Complies with EN60950, FCC Class A, CISPR22/85, CE, EU RoHS
Data Inputs	4 Single Link HDMI inputs, 1 DisplayPort input
Control	IR Remote, RS232, Ethernet (optional)
Per Panel Dimensions (Including Mount)	40.24" x 22.70" x 3.6"
Per Panel Weight (Including Mount)	42 lbs
Shipping weight	142 lbs
Touch Options	Clarity Matrix MultiTouch Kits