

For Topaz Signature Pads

Wireless Signature Pad

For T-LBK750, T-LBK755, T-LBK766 Models & SE Versions

CONNECTION AND COMMUNICATION


The Topaz Wireless Pad enables Topaz -BHSB-R signature pads to be used in an environment with WiFi or Bluetooth connection. Available on signature pads or sold separately for existing -BHSB-R signature pad users. The unit works with existing Topaz software and just requires a simple Topaz Network Port Driver installer and configuration on the PC to complete the connection.

Communication with the Wireless Signature Pad is bi-directional, allowing for interactive text, graphics, and pen-tap hotspots and checkboxes, in addition to signature capture. Serving as a virtual serial device, the Wireless Signature Pad is also compatible with remote usage (Citrix, Terminal Server, VDI environments, and ore). Data security is handled by the built-ins standard WiFi and Bluetooth protocols.

BATTERY LIFE AND HOUSING INFORMATION

The Topaz Wireless Signature Pad uses a long-life thin Lithium Polymer battery, providing up to eight (8) hours of continuous use with a T-LBK766 signature pad, or sixteen (16) hours of continuous use with a T-LBK750 or T-LBK755 signature pad.

The Wireless Signature Pad comes with a protected power switch in the rear of the unit, as well as built-in power management to allow use over several days without recharging.

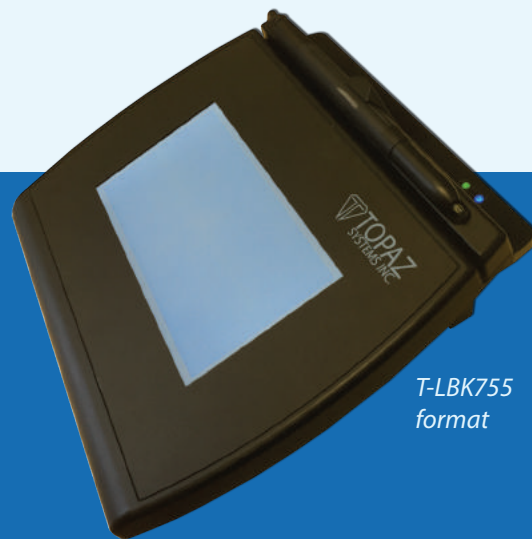

T-LBK755
format

Connection

WiFi-Enabled

OR

Bluetooth-Enabled

Dimensions

Thin profile

Adds 0.3" in thickness to the unit

Adds 0.5" to the back of the unit

Resolution & Conversion Rate

Exceeds industry standards

Programmable PPI

Authentication Capability

Forensic quality .SIG data capable of examination and authentication with Topaz software

Complete Software Collection

www.topazsystems.com/software

Remote Usage Options

Citrix, Terminal Server,
and VDI environments



650 Cochran Street
Suite 6 | Simi Valley, CA
93065 | USA

P: 805.520.8282
F: 805.520.0867
www.topazsystems.com