

55" (54.6" viewable) Full HD LED Commercial Display

Convenience and Control for Hospitality Environments

CDE5502



Versatility and good looks go hand-in-hand in a display destined to shine in any hospitality, business, or retail environment. Loaded with control, management and connectivity features, the ViewSonic® CDE5502 55" (54.6" viewable) commercial LED display makes it easy to deploy and maintain multiple screens throughout your establishment. From in-room entertainment to eye-catching digital signage to stunning sports coverage, guests will enjoy vibrant multimedia content – while you enjoy the convenience of customizable, automated multi-screen control. Plus, with a sleek finish, slim bezel and optional glass stand, it's sure to add appeal to any décor.

Key Features:


- Integrated USB multimedia player
- Free-bundled vController™ software
- Hospitality mode for automated multi-screen control
- Control multiple devices with HDMI® CEC and IR pass-through
- Enhanced viewing comfort

Designed for:

- Hospitality
- Business
- Retail

55" (54.6" viewable) Full HD LED Commercial Display

CDE5502

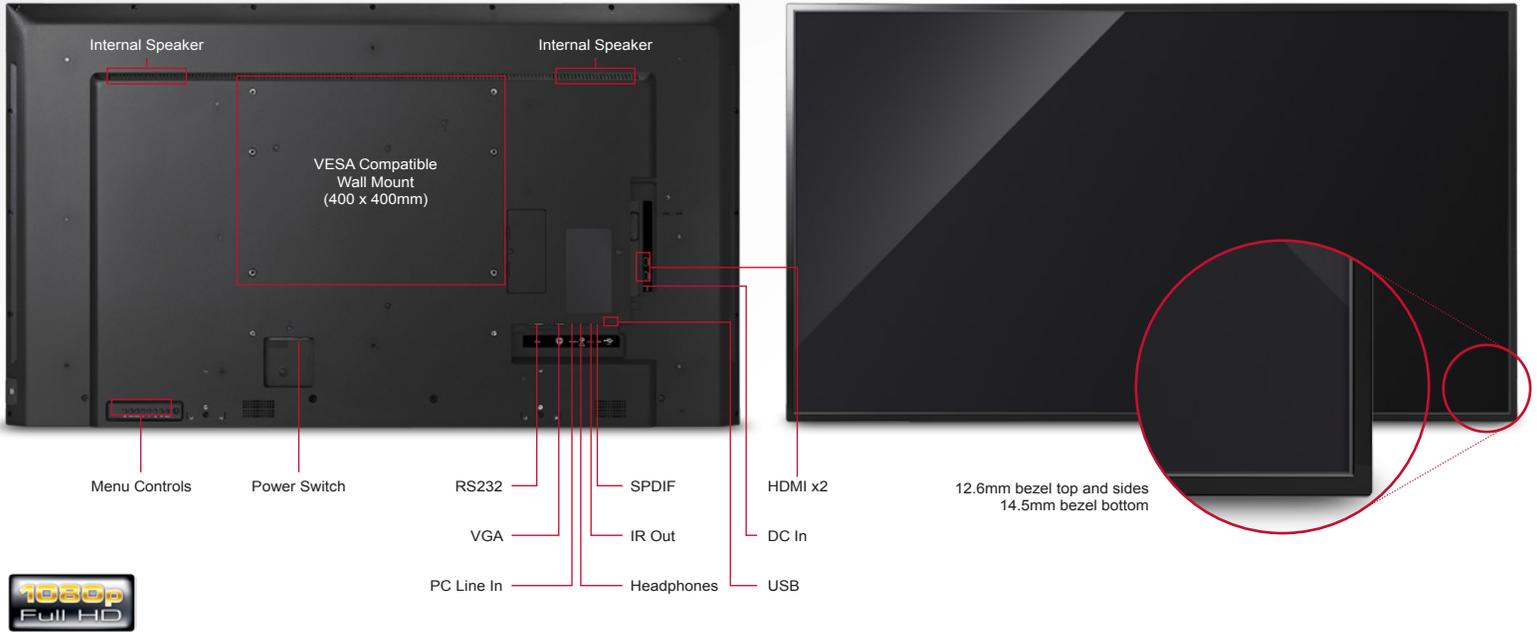

Specifications

PANEL	Type	IPS TFT LCD Module with DLED Backlight
	Display Area	47.6" horizontal x 26.8" vertical; 54.6" diagonal
	Optimum Resolution	1920x1080
	Contrast Ratio	1200:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	9ms
	Light Source	Long life, 30,000 hrs. (typ)
	Brightness	350 cd/m ²
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating 3H
INPUT	Video Input	HDMI, VGA
	Control Input	RS232, IR In
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p
CONNECTOR	Analog	15-pin mini D-sub (VGA x1), PC Audio In (x1), headphone out
	Digital	HDMI (x2), SPDIF, USB, RS232
	Power	5V/2A DC In
CONTROLS	Panel	Power, Mute, Input, Vol +, Vol -, Up, Down, Menu
	Picture	Auto picture, Brightness, Contrast, Color, Advanced settings, Reset picture setting
	Sound	Auto sound, Equalizer, Balance, Reset sound settings
	Clock	Sleep timer, Date/Time
	Features	Language, PC settings, Button lock, Remote lock, Monitor ID, Current software info, Reset AV & features
	USB Menu	Photo, Music, Movie

POWER	Voltage	AC 100–240V (universal), 50 / 60Hz
	Consumption	140W (typ), 160W (max)
OPERATING CONDITIONS	Temperature	32-104°F (0–40°C)
	Humidity	20-80% (non-condensing)
DIMENSIONS (W x H x D)	Physical	48.8 x 28.0 x 2.4 in. / 1238.6 x 711.1 x 60 mm
	Packaging	48.8 x 29.6 x 13.0 in. / 1365 x 864 x 185 mm
BEZEL DIMENSIONS	Top/Left	12.6 mm / 12.6 mm
	Bottom / Right	14.5 mm / 12.6 mm
WEIGHT	Net	35.3 lbs / 16.0 kg
	Gross	50.7 lbs / 23.0 kg
WALL MOUNT	VESA Compatible	200 x 400 / 400 x 400 mm
REGULATIONS		CE, CB, ErP, WEEE, C-tick, cTUVus, FCC, ENERGY STAR, Mexico Energy
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts and labor

Optional Accessories

VESA Compatible Wall Mount	WMK-014
Stand for CDE5502	STND-034

What's in the box?

CDE5502 display, power cable, VGA cable, RS232 cable, remote control with batteries, ViewSonic Wizard CD (User Guide), Quick Start Guide



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.