

A4 MONOCHROME PRINTER FOR BUSINESS NETWORKS

EPSON EPL-N3000 SERIES



Quick and low-cost: print speeds of 34ppm, 7 seconds first page out and high yield toner cartridges - 17,000 pages.

Fast handling of complex print jobs: thanks to 300MHz controller and 64 MB memory, expandable to 512 MB.

Great flexibility for large print runs: up to 1,800 sheets from 4 trays - 700 sheet standard paper capacity, and 2 optional 550 sheet paper cassettes. Options also include duplex printing and an offset stacker.

All the interfaces you need: Ethernet 10/100 Base Tx, high-speed USB and Parallel as standard.

Meeting the challenges of your business – at low cost

This business printer delivers excellent results with speed, efficiency and reliability. Professional performance is assured, with print speeds of 34ppm and a 7 second first page out time. All this whilst keeping the cost per page very low, resulting in a low lifetime cost of ownership.

Versatile solution for a wide range of printing tasks

This printer is fast, and results always look superb, thanks to Epson's 1200dpi RiTech technology. A range of standard and optional paper handling provides the flexibility to match individual and changing needs, with an optional duplex unit to add even more efficiency. In addition, the optional hard disk drive offers advanced functions including: confidential printing, proofing and reprinting.


Simple, comprehensive printer integration and management

All popular operating systems are supported, with USB and parallel connection, and a 10/100Base Tx network interface ensures quick printer availability for multiple users. Seamless integration is provided with genuine Adobe® PostScript® 3™, PCL5e and PCL6. EpsonNet tools also provide simple configuration, monitoring and management across the network.

PRODUCT SPECIFICATIONS

PRINT FEATURES	
Printing technology	Laser
Resolution	1200dpi RiT* (*Epson Resolution Improvement Technology)
Print speed	A4: 34ppm, A4 duplex: 20.9ppm
First page out	7 sec
Warm up time	17 sec
Maximum monthly volume	150,000 pages
CONTROLLER SPECIFICATIONS	
Processor	300MHz
Memory	Standard: 64MB, Max: 512MB
Printer control language emulations	Genuine Adobe® PostScript® 3™, PCL6, PCL5e, ESC/Page™, ESC/P2™, FX, I239X
Resident typefaces	Scalable: 84 ESC/Page™, 93 PCL, 17 PS3, 10 ESC/P2™, 8 FX, 8 I239X Bitmap: 7 ESC/Page™, 7 PCL
INTERFACES AND CONNECTIVITY	
Standard interfaces	Ethernet (100 Base - Tx, 10 Base - T), USB (2.0 compatible), Parallel (IEEE 1284)
Optional interfaces	Type B
Network printing protocols	TCP/IP: LPR, FTP, IPP, PORT2501, PORT9100 MS Network: SMB Netware: Operation mode, Standby, NDS Print Server, Bindery Print Server, Remote Printer AppleTalk
Network management protocols	TCP/IP: SNMP, ENPC, HTTP, TELNET, DHCP, BOOTP, PING, DDNS, SNTP, Rendezvous Microsoft Network: Auto-IP, SSDP; NetBEUI: SNMP, SSDP; NetWare and AppleTalk: SNMP, ENPC
CONSUMABLES LIFE	
Imaging cartridge	17,000 pages - includes toner, photoconductor & waste toner collector (initial cartridge 6,000 pages)
MAINTENANCE ITEMS	
Maintenance kit (fuser)	200,000 pages (C13S053017BA)
MEDIA HANDLING	
Standard paper input	700 sheets (150 multi-purpose tray + 550 sheet paper cassette)
Maximum paper input	1,800 sheets (150 multi-purpose tray + 550 sheet paper cassette + 2 x optional 550 sheet paper cassette)
Paper size	A4, A5, B5, F4, LT, HLT, LGL, EXE, GLG, GLT, Mon, COM 10, DL, C5, C6. Custom size - 76.2 to 215.9 mm x 127 to 355.6 mm
Paper weight	60-216 g/m ²
Optional paper handling	550 sheet paper cassette (C12C802091), max 2 500 sheet offset stacker (C12C802111), duplex unit (C12C802101)
Paper output standard/maximum	500 sheets / 1000 sheets (500 standard + 500 offset stacker)
POWER REQUIREMENTS	
Norms	Directives IEC61000-4-4, IEC60801-2
Rated voltage/frequency/current	220/240V / 50 to 60Hz / 4.9A
Power consumption	Max operating 959W (Av operating 538W - Av standby 76W - Av sleep 10W)
SYSTEM REQUIREMENT & OS SUPPORT	
PC	Parallel port, Ethernet (10/100 Base Tx) or USB (1.1 or higher)
OS supported	Microsoft® Windows® NT 4.0 / 98 / 2000 / Me / XP / XP 64bit Edition / Server 2003 / Server 2003 64bit Edition / Vista / Vista 64bit Edition / Server 2008 / Server 2008 64bit Edition
Mac	EtherTalk or USB
OS supported	Mac OS 8.1 or later, 9.X and OSX (PostScript only)
Linux/Unix/Citrix/SAP/Novel Support	For compatibility details relating to Linux, Unix, Novell, SAP, etc. Please refer to http://www.business-solutions.epson.co.uk/Compatible.htm
ADDITIONAL SOFTWARE	
Drivers	Printer driver, Epson Status Monitor 3
Software	Network utilities, network guide, reference guide, paper jam guide
DIMENSIONS AND WEIGHT	
(W x D x H mm, Kg)	EPL-N3000 main unit: 428 x 468 x 404 mm, 20.9 Kg
ENVIRONMENTAL CONDITIONS	
Temperature	Operation: 5 to 35°C, storage: 0 to 35°C
Humidity	Operation: 15 to 85% RH, storage: 10 to 80% RH
Sound pressure	Operating: 53.6 dB(A), stanby: 27 dB(A)
SAFETY AND REGULATIONS	
Safety standards	Directives EN 60950, IEC60950, CE Directive, FDA21CFR, GB7247.1, IEC60825-1 Directives EN 550222(CISPR 22), EN 55024(CPISPR 24), EN 61000-3-2, EN 61000-3-3, IEC61000-4-[2,3,4,5,6,8,11]
EMC/EMI	0.02m g/m ³ or less (New Blue Angel standard compliance) UL Standard compliant
Materials	Does not contain any materials prohibited by any country's regulations
Chemical regulations	Conform to OSHA, TSCA, and EINECS
WARRANTY*	
Standard	1 year On-Site
Optional	Optional extension to 3 years

EPSON EPL-N3000 SERIES

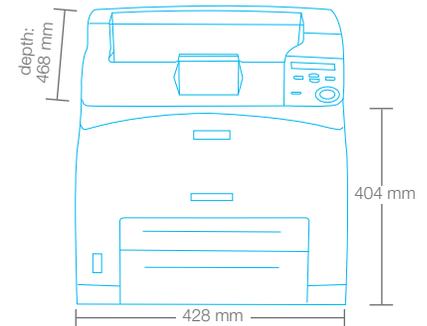

MODEL CONFIGURATION

- EPL-N3000 C11C554001DA
- EPL-N3000T includes 550 sheet paper cassette C11C554001DB
- EPL-N3000D includes automatic duplex C11C554001BV
- EPL-N3000DT includes automatic duplex and 550 sheet paper cassette C11C554001DC
- EPL-N3000DTS includes automatic duplex, 550 sheet paper cassette and stacker C11C554001BW

SUPPLIES

- Imaging cartridge: C13S051111
Standard: 17,000 pages
- Fuser: 200,000 pages C13S053017BA
- Initial cartridge: 6,000 pages

OPTIONS

- 550 sheet paper cassette: C12C802091
- 500 sheet offset stacker: C12C802111
- Duplex unit: C12C802101
- Epson CoverPlus 3 year on-site Extended warranty: ECPGRP55

* Warranty offers are not available in all countries. Please contact your local Epson representative for more information.



For more information please contact

Telephone: 0871 222 6702 (UK)
01 436 7742 (Republic of Ireland)
E-mail: enquiries@epson.co.uk
Chat: etalk.epson-europe.com
Fax: 0871 222 6740

Web: www.epson.co.uk
www.epson.ie

Better Products for a Better Future™

At Epson, we know that planning for the future requires a strong commitment to the environment. That is why we strive to create innovative products that are reliable, recyclable, and energy efficient. Better products that use fewer resources help ensure a better future for us all.

EPSON®