由 Autodesk 教育版产品制作

Items	Content Revised	Date
1		

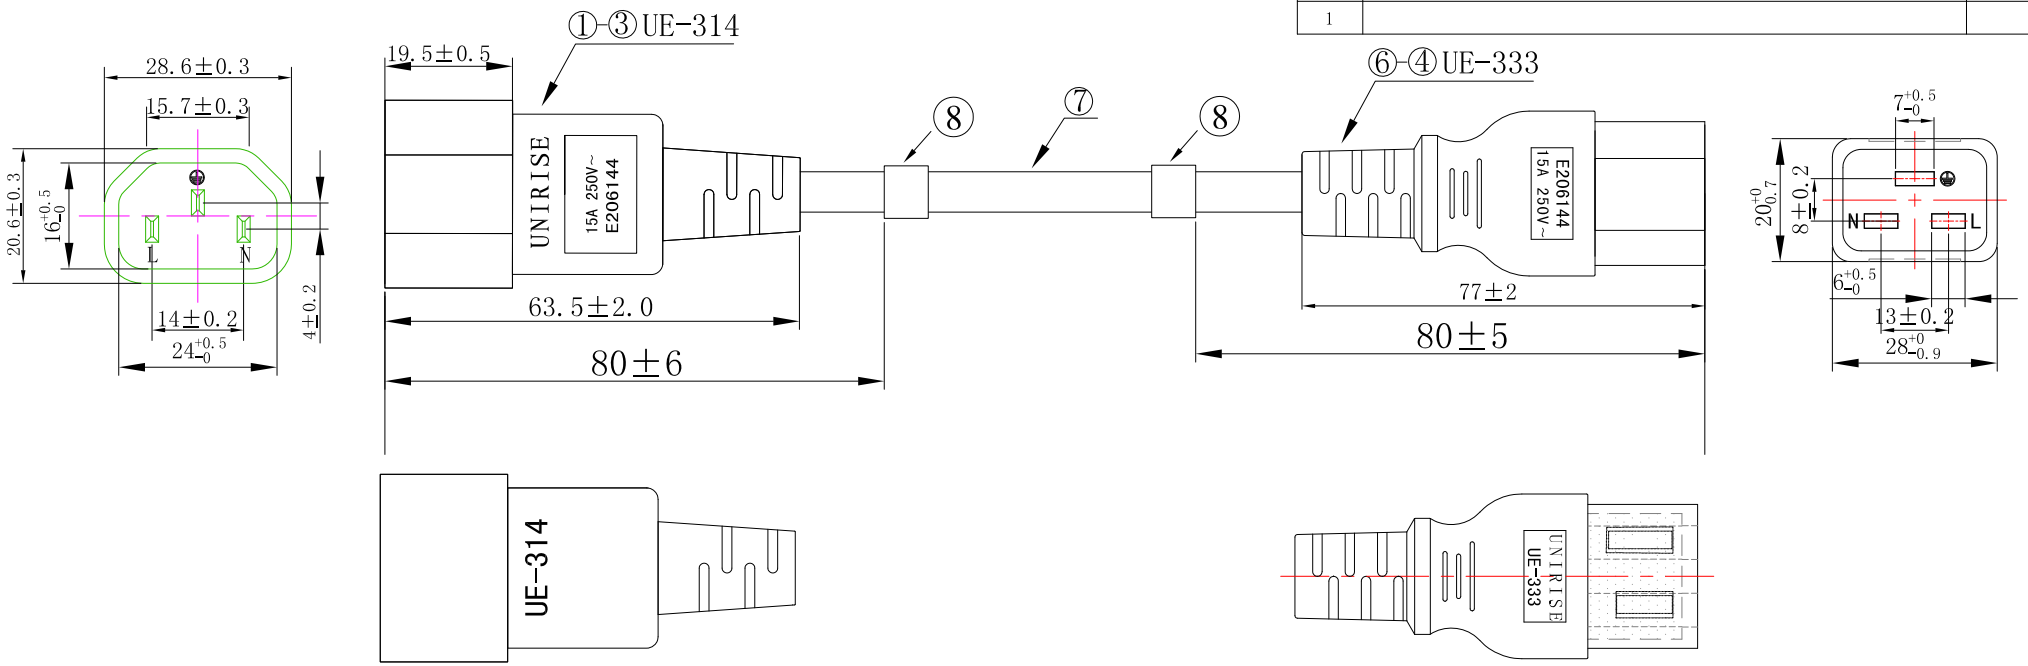

Technical requirements:

1. Plug: a: UE-333, Current(A): 15, Voltage(V): 250
   b: UE-314, Current(A): 15, Voltage(V): 250
2. Cord: Soft SJT #14/3C 105℃ unirise
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

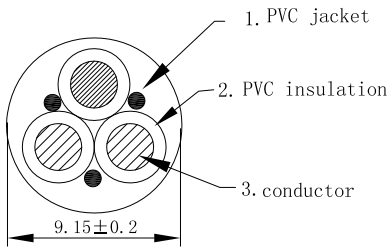

41*0.25±0.005MM OD:9.15±0.2MM

BOM表

8	39005023	47x13mm PET Paster Length Label	2PCS	----
7	205353021026	SJT 14/3C 105℃ Soft	1PCS	
6	306560220	PVC of plug 77A	/	
5	316333900	UE-333 Inside Shelf	1PCS	White
4	315333900	Blade of UE-333	3PCS	----
3	306560220	PVC of plug 77A	/	
2	315314900	Blade of UE-314	3PCS	----
1	316314220	UE-314 Inside Shelf	1PCS	Red
Items	Part Number	Description	Q'TY	Colour

CORD MARKING: E176096 (UL) SJT VW-1 105℃ 300V 3x2.08mm2 (14AWG)
Or C(UL) SJT FT1 105℃ 300V 3x2.08mm2 (14AWG) UNIRISE

CUSTOMER CONFIRM	PWCD-C14C19-15A-XXF-YYY	XXF = LENGTH YYY = COLOR	
Drawing No.:	Unirise	Page:	Version:A
Power Supply Cord: UE-333+UE-314		**Approved by:jason**	
Customer:		**Checked by:king**	
Colour:		**Drawn by:** songyu	
Sample Part NO..: W009-005-2013	**Unit:** mm	Sheet:	DATE:2013-05-13

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作