



# P12B projector

Touch—it's the way the real world works. Now it can be the way your interactive classroom works, too. Touch to draw. Touch to write. Touch to move, scale, and rotate. With up to 10 users working at the same time. Collaboration made brilliant.

“[P12B] is an all-in-one solution to effectively deliver classroom instruction and collaboration.”

Tricia Fontenot  
Third-Grade Teacher

What could be more natural than touch?

It's the new standard for smartphones and tablets. It's second nature to today's students, so touch requires almost no training.

The P12B ultra-short-throw projector brings collaborative, 10-touch interactivity\* to your classrooms, with images as large as 110 inches!

- A full-featured hardware and software solution.
- Comes with easy-to-learn and easy-to-use MimioStudio™ classroom software and the MimioMobile™ app.
- Software and app enable collaboration and assessment either at the front of the room or on almost any student device.

- A solution that makes it easy to gauge and personalize student learning.
- Laser Curtain Module is powered directly from the projector – no extra wires or complicated installation.
- Analog and digital audio/video connections ensure compatibility with virtually any PC.
- Runs on Mac, Windows, and Linux.
- Ethernet LAN connectivity, for central management and control.



Up to ten students can work together at the front of the classroom, with touch interactivity.

To learn more, call 360.464.2119.

\* Also available as a pen-only and non-interactive option.

©2016 BOXLIGHT, Inc. © 2016 Mimio | Specifications subject to change without notice.



# Key Features

## Package Contents



**P12BTW touch-interactive projector** - Projector, AC power cord (4m), HDMI cable (5m), remote control with battery, mini-USB cable (5m), 2 magnetic static pens, laser curtain module, DC power cable for laser curtain, and MimioStudio software license.

**P12BIW pen-interactive projector** - Projector, AC power cord (4m), HDMI cable (5m), remote control with battery, mini-USB cable (5m), 2 IR pens, and MimioStudio software license.

**N12BNW non-interactive projector** - Projector, AC power cord (4m), HDMI cable (5m), remote control with battery, and mini-USB cable (5m).

## Specifications

|         |                             |   |
|---------|-----------------------------|---|
| OS      | Software Requirements       | MimioStudio 11.6 or higher on a Windows, Mac, or Linux OS                                     |
|         | Brightness                  | 4,000 lumens (2,800 eco)  |
|         | Light Source                | 260 W Philips halogen   |
|         | Lamp Life (typical)         | 3000 hr (standard) / 4000 hr (economy)  |
|         | Native Aspect Ratio         | 16:10   |
|         | Native Resolution           | WXGA 1280 x 800   |
|         | Image Size (diagonal)       | 80 in. - 110 in. / 203 cm - 279 cm  |
|         | Keystone Correction         | Vertical: $\pm 10^\circ$  |
|         | Contrast Ratio (typical)    | 1,800:1 (10,000:1 high contrast)  |
|         | Color Reproduction          | 1.07 billion colors (R/G/B 10 bit)  |
|         | Color Uniformity            | $\Delta u^*v^* \leq 0.03$   |
|         | Projection Lens             | f/2.4   |
|         | Throw Ratio                 | Ultra-short throw of 0.27   |
|         | Focus Type                  | Manual  |
|         | Projection Technology       | Digital Light Processing (DLP), utilizing a 6-segment color wheel.                            |
| Display | Closed Captioning           | Based on TI DDP4421 spec, CC1/CC2/CC3/CC4 supported   |
|         | 3D                          | DLP Link 3D and HDMI 1.4a 3D  |
|         | Digital A/V Inputs          | HDMI x 2  |
|         | Video Analog Inputs         | - VGA x 1<br>- VGA in/out switched* x 1<br>- Composite x 1                                    |
|         | Video Analog Outputs        | VGA in/out switched x 1   |
|         | Audio Analog Inputs         | - Stereo line 3.5 mm x 1<br>- Stereo line RCA jacks x 1<br>- Mic level 3.5 mm x 1             |
|         | Audio Analog Outputs        | Line out 3.5 mm x 1   |
|         | Speaker                     | 1 speaker 10 Watts.   |
|         | LAN                         | Standard using RJ-45 connector  |
|         | LAN Control Protocols       | Crestron  |
|         | Laser Curtain DC Power      | 3.5 mm  |
|         | Service and Network Control | RS-232, RJ45, mini-USB (shared with interactive)  |
|         | Mounting                    | Front or rear projection, wall, ceiling, or table mount**                                     |
|         | Security                    | Kensington Lock >20 kg  |
| General | Power Supply                | AC 100 – 240 V 50-60 Hz   |
|         | Power Consumption (typical) | Normal mode: 330 W<br>ECO mode: 210 W<br>Standby: < 0.5 W Touch Mode***                       |
|         | Operating Temperature       | 5 - 40° C (41 - 104° F) non-condensing  |
|         | Fan Noise                   | Full mode : 36dBA (typical) / 38dBA (maximum)<br>ECO mode : 32dBA (typical) / 35dBA (maximum) |

|                   |                                 |  |
|-------------------|---------------------------------|--|
| Interactivity**** | Touch Points                    | 10   |
|                   | Calibration                     | Auto/Manual  |
|                   | Laser Curtain Module            | IR Laser 825 nm, 20,000 hrs  |
|                   | Laser Curtain Power             | 12V/0.3A from projector  |
|                   | Visible Laser Curtain Alignment | - Visible light 650 nm<br>- Optical power < 0.39 mW<br>- Dot size at focus point 10 mm |
|                   | Whiteboard Non-planarity        | <3 mm  |
|                   | Laser Safety                    | IEC 60825-1 Class-1  |
|                   | Interactivity                   | USB Mini   |

\* One connector switchable between VGA in or out.

\*\* Ceiling and table mount require third-party bracket.



\*\*\* LAN/RS-232/VGA out are off.

\*\*\*\* Laser Curtain specifications only apply to touch model.

## Dimensions and Weight


### Projector

Weight: 5 kg  
(11.02 lb)

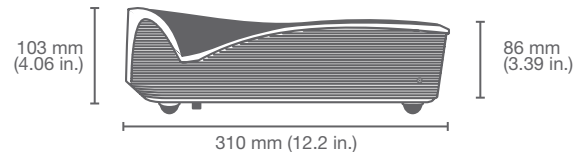


### Laser Curtain Module

Weight: .35 kg  
(.77 lb)

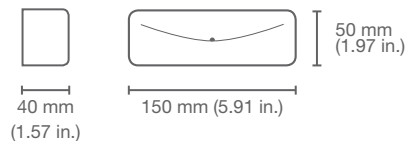

## Connections

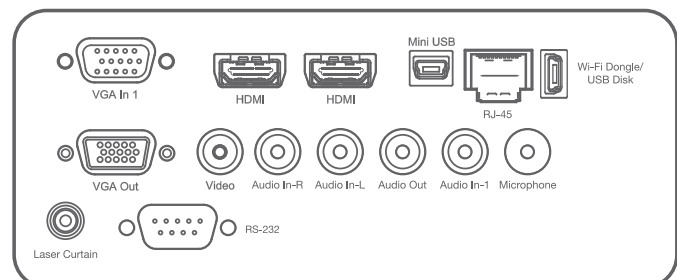

To learn more, call 360.464.2119.

Specifications subject to change without notice.