


Overview

**HP recommends Windows Vista®
Business**

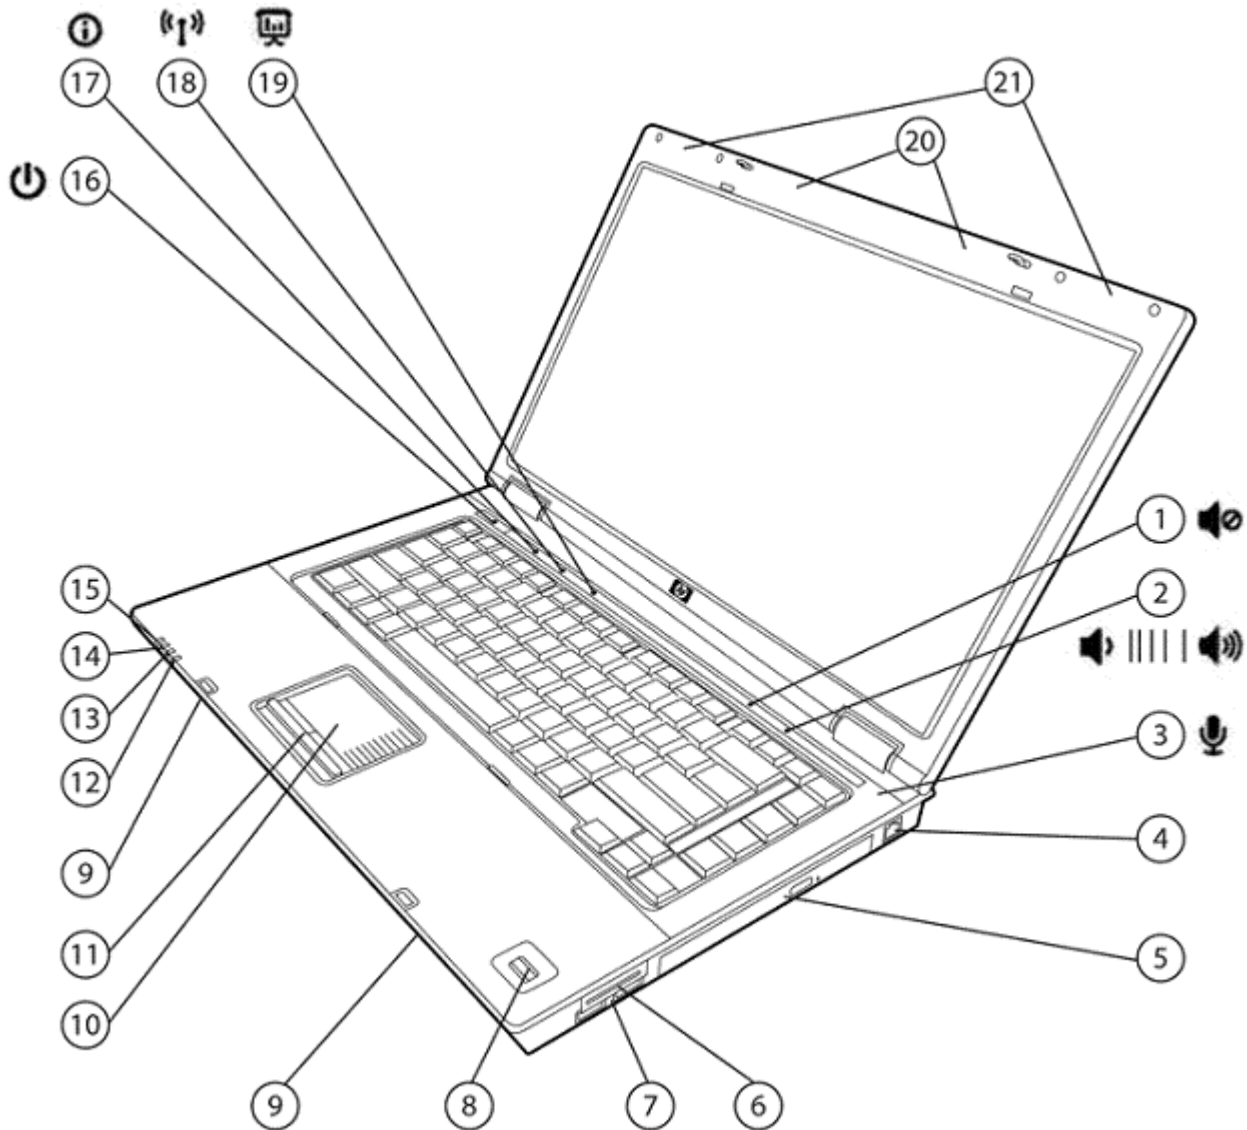


- | | |
|---|--|
| 1. Volume mute button with LED indicator | 12. Hard drive activity / HP 3D DriveGuard LED |
| 2. Volume scroll zone with up/down LED indicators | 13. Battery charging LED |
| 3. Integrated microphone | 14. Power/standby LED |
| 4. RJ-11/modem port | 15. Wireless on/off LED |
| 5. Optical drive | 16. Power button with LED |
| 6. Media Card Reader | 17. HP Info / HP QuickLook button with LED indicator |
| 7. 2 USB 2.0 ports | 18. Wireless on/off button with LED indicator |
| 8. HP Fingerprint Sensor | 19. HP Presentation button with LED indicator |
| 9. Integrated stereo speakers | 20. WLAN antennas (with WLAN option) |

Overview

- 10. Touchpad with scroll zone
- 11. Touchpad buttons

- 21. WWAN antennas (with WWAN option)

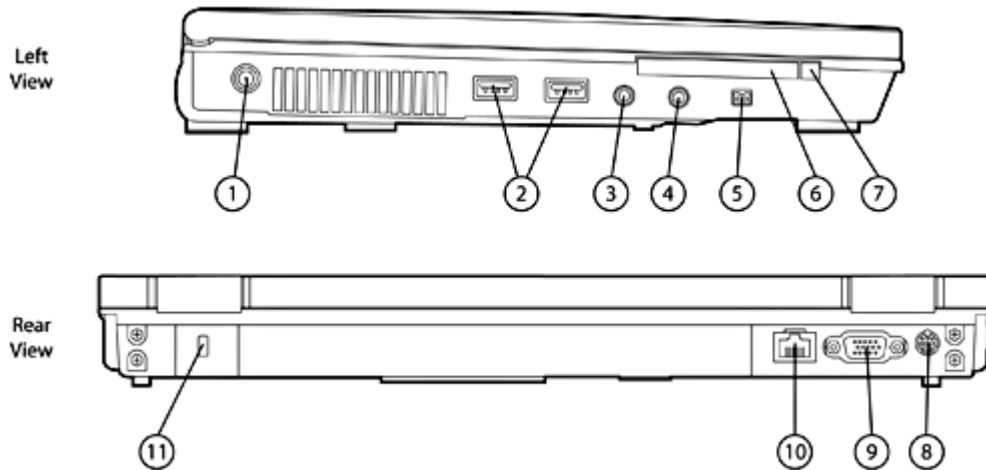

- | | |
|------------------------------|-----------------------------------|
| 1. Power connector | 7. PC Card eject button |
| 2. 2 USB 2.0 ports | 8. S-Video TV out |
| 3. Stereo headphone/line out | 9. VGA/external monitor connector |
| 4. Stereo microphone in | 10. RJ-45/Ethernet port |
| 5. 1394a port | 11. Kensington Lock slot |
| 6. Type I/II PC Card slot | |

At A Glance

- Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial), Genuine Windows Vista Business*, Genuine Windows Vista Home Basic, Genuine Windows XP Professional, or FreeDOS
- Widescreen 15.4-inch diagonal display with wide-viewing angle, BrightView and HP Privacy Filter support
- Flexible wireless connectivity options:
 - Integrated HP ev2200 1xEV-DO or HP hs2300 HSDPA Broadband Wireless module
 - Integrated 802.11 a/b/g/draft-n, a/b/g, or b/g wireless LAN module
 - Bluetooth®
- Intel® Core™2 Duo processor
- Thin, lightweight design starting at 5.7 lb/2.59 kg and 1.4-inch/34.9 mm thin at front
- Security features including Drive Encryption for HP ProtectTools, HP Fingerprint Sensor, TPM 1.2
- HP QuickLook on Windows Vista models for instant access to email, calendar, and contact information
- Up to 160-GB 5400 rpm or 120-GB 7200 rpm user-removable hard drive with HP 3D DriveGuard protection
- 6-in-1 Media Card Reader (Secure Digital, MultiMediaCard, Memory Stick, Memory Stick Pro, Memory Stick Duo (adapter required) and xD memory cards)
- Touch-sensitive controls for HP Info Center, HP QuickLook, wireless on/off, HP Presentation button, external volume up, volume down, and mute
- Integrated optical drive, including optional DVD+/-RW SuperMulti DL LightScribe Drive
- Up to 4 GB of 667-MHz DDR2 SDRAM, dual channel memory support
- Mobile Intel Graphics Media Accelerator X3100, with up to 384-MB shared system memory (select models)
- Broadcom NetLink Gigabit Ethernet Controller
- Touchpad with scroll zone

* At initial boot, either 32- or 64-bit can be selected. This is a one time selection and the other version will be deleted.

Standard Features

Processors

Intel Core 2 Duo Processor T9500 (2.60-GHz, 800-MHz FSB, 6-MB L2 cache)*
 Intel Core 2 Duo Processor T9300 (2.50-GHz, 800-MHz FSB, 6-MB L2 cache)*
 Intel Core 2 Duo Processor T8300 (2.40-GHz, 800-MHz FSB, 3-MB L2 cache)*
 Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-MHz FSB, 3-MB L2 cache)*
 Intel Core 2 Duo Processor T7700 (2.40-GHz, 800-MHz FSB, 4-MB L2 cache)*
 Intel Core 2 Duo Processor T7500 (2.20-GHz, 800-MHz FSB, 4-MB L2 cache)*
 Intel Core 2 Duo Processor T7300 (2.00-GHz, 800-MHz FSB, 4-MB L2 cache)*
 Intel Core 2 Duo Processor T7250 (2.00-GHz, 800-MHz FSB, 2-MB L2 cache)*
 Intel Celeron Processor 560 (2.10-GHz, 533-MHz FSB, 1-MB L2 cache)*
 Intel Celeron Processor 545 (2.00-GHz, 533-MHz FSB, 1-MB L2 cache)*

* Intel's numbering is not a measurement of higher performance.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

Operating System

Preinstalled

Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
 Genuine Windows Vista® Ultimate
 Genuine Windows Vista Business†*
 Genuine Windows Vista Home Basic*
 Genuine Windows XP Professional
 FreeDOS

Supported

Genuine Windows Vista Enterprise*

Certified

SuSE Linux Enterprise Desktop 10

† At initial boot, either 32- or 64-bit can be selected. This is a one time selection and the other version will be deleted.

* Certain Windows Vista product features require advanced or additional hardware. See <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <http://www.windowsvista.com/upgradeadvisor>.

Chipset

Mobile Intel GM965

Standard Features

Graphics

Mobile Intel Graphics Media Accelerator X3100

Total System Memory	Reserved Graphics Memory *	Maximum Graphics Memory **
Windows XP		
256 MB	8 MB	128 MB
512 or 768 MB	8 MB	256 MB
1024 MB or more	8 MB	384 MB
Windows Vista		
512 MB	32 MB	64 MB
768 MB	128 MB	123 MB
1024 MB	128 MB	251 MB
1536 MB or more	128 MB	358 MB
* System memory exclusive to graphics. ** Total available graphics memory (HyperMemory), which includes Reserved Graphics Memory and Shared System Memory.		

Microsoft DirectX 9 capable

Display

Internal

15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)
 15.4-inch diagonal WXGA BrightView (1280 x 800 resolution)
 15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
 HP Privacy Filter support

External

Up to 32-bit per pixel color depth
VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz
NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Memory

Standard

512-MB, 1024-MB or 2048-MB 667-MHz DDR2 SDRAM; two SODIMM slots supporting dual channel memory

Maximum

Upgradeable to 4096-MB with 2048-MB SODIMM in slots 1 and 2

Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Standard Features

Communications

Integrated Broadcom NetLink Gigabit Ethernet Controller (10/100/1000 NIC)*
56K V.92 modem**

* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

Wireless Devices

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Wireless LAN is factory configurable or available as an option to be added later. Broadband Wireless (WWAN) requires Windows Vista Business or Windows XP Professional and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

HP ev2200 1xEV-DO Broadband Wireless Module

Integrated WWAN module connects to the Verizon Wireless BroadbandAccess and NationalAccess networks (U.S. only)

Supports CDMA 1xEV-DO, 1xRTT connections at 850 and 1900 MHz.

NOTE: Separately purchased Verizon Wireless service is required. For details, go to <http://www.hp.com/go/broadbandwireless>.

Two 850/900/1800/1900/2100-MHz antennas integrated in the top of the display panel support current and future WWAN technologies

HP hs2300 HSDPA Broadband Wireless Module

Integrated WWAN module that provides connection to GSM, GPRS, EDGE, UMTS, and HSDPA mobile networks in many countries. Currently available for the AT&T Broadbandconnect network in the U.S. (supports international roaming).

NOTE: Separately purchased mobile network operator service is required.

Two 850/900/1800/1900/2100-MHz antennas integrated in the top of the display panel support current and future WWAN technologies.

All 802.11a/b/g integrated wireless LAN options

Wi-Fi certified

Cisco Compatible Extensions support (Version 4.0) with Microsoft Windows XP

Wired Equivalent Privacy (WEP) support up to 128-bit keys

Wi-Fi Protected Access (WPA) and WPA2 support

802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP

Advanced Encryption Standard (AES) support

WiFi certified for WPA2, WMM

Dual antennas integrated in the display enclosure

Intel Wireless WiFi Link 4965AGN*

Integrated support for 802.11a, b, g, and draft-n
Up to 300-mbps data rate

Intel Wireless WiFi Link 4965AG*

Integrated support for 802.11 a, b and g
Up to 54-mbps data rate

Intel PRO/Wireless 3945ABG Network Connection*

Integrated support for 802.11 a, b and g
Up to 54-mbps data rate

Standard Features

Broadcom 4311AG 802.11a/b/g WiFi Adapter	Integrated support for 802.11 a, b and g Up to 54-mbps data rate
HP Integrated Module with Bluetooth Wireless Technology	Bluetooth Specification v2.0 compliant Works with a wide range of Bluetooth devices
<i>* Requires Intel Core 2 Duo processor</i>	

Keyboard

The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. U.S. and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19-mm x 19-mm key pitch (center-to-center spacing), 2.5-mm stroke, and comfort-dished keycaps.

Touch-sensitive controls

Touch-sensitive controls provide easy access to the following features: HP Info Center, HP QuickLook, wireless on/off, HP Presentation button, external volume up, volume down, and mute

Pointing device

Touchpad with scroll zone, two pick buttons

Expansion card slots

1 Type I/II PC Card slot or Optional Integrated Smart Card Reader (replaces PC Card slot)	Supports 32-bit CardBus and 16-bit PC Cards Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
6 - in - 1 Media Card Reader	Supports SD (Secure Digital), Multimedia card, Memory Stick, Memory Stick Pro, Memory Stick Duo*, Picture card
<i>* Memory Stick Duo Adapters are required and sold separately. Inserting a Memory Stick Duo Card directly into your notebook could damage the memory card and/or notebook.</i>	

Standard Features

Storage	Hard drives	80/120/160-GB 5400 rpm SMART SATA 80/120-GB 7200 rpm SMART SATA
	NOTE: These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.	
	HP 3D DriveGuard	The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.
Fixed optical drives		DVD/CD-RW Combo Drive DVD+/-RW SuperMulti DL Drive DVD+/-RW SuperMulti DL LightScribe Drive
Interfaces	PC Card slot	One Type I/II PC Card slot or optional Smart Card Reader
	External monitor	One – VGA
	1394a	One
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem	One
	RJ-45/Ethernet	One
	S-video TV out	One (Support for NTSC/PAL)
	USB 2.0	Four
	Docking connector	One
	Secondary battery connector	One
	LED status indicators	Fifteen
Audio	High Definition Audio support w/24-bit DAC	
	Integrated stereo speakers	
	Integrated microphone	
	Touch-sensitive controls for volume up, volume down, and mute	
	Stereo headphone/line out	
	Stereo microphone in	

Standard Features

Software

Preinstalled software with Windows Vista or Windows XP

PDF Complete
HP Backup and Recovery Manager
HP Help and Support Center
HP QuickLook (Windows Vista only)
HP OpenView Radia Management Agent
HP Universal Print Driver
HP ProtectTools Security Manager:
 BIOS Configuration for HP ProtectTools
 Credential Manager for HP ProtectTools
 Device Access Manager for HP ProtectTools*
 Drive Encryption for HP ProtectTools
 Embedded Security for HP ProtectTools
HP Quick Launch Buttons
HP Wireless Assistant
Microsoft Office Ready with 60-day Office Professional 2007 Trial Edition (select models)
Roxio Creator 9 (for optional DVD+/-RW and DVD/CDRW drives)
Synaptics Touchpad Driver
Symantec Norton Internet Security with complimentary 60-day live update
Intervideo WinDVD – DVD Player

Additional software available from the web

HP Client Manager
Java Card Security for HP ProtectTools

* Download available from hp.com for Windows Vista; preinstalled with Windows XP.

HP Backup and Recovery Manager

Each unit is shipped with HP Backup and Recovery Manager. HP Backup and Recovery Manager can provide data and system file protection for HP business PCs to enable fast recovery if the system becomes corrupted or if important information is accidentally deleted. HP Backup and Recovery Manager can perform scheduled or manual backups of the entire drive or individual files and folders. Up to 10 GB of the hard drive is reserved for the system recovery software. HP Backup and Recovery Manager can also create software recovery CDs or DVDs (requires optional hardware).

SMBIOS Version 2.4

System Management BIOS, previously known as DMI BIOS, is used to store system management information.

HP ProtectTools Security Manager

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available are:

- BIOS Configuration for HP ProtectTools
- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- Embedded Security for HP ProtectTools
- Java Card Security for HP ProtectTools

Standard Features

Security

Standard Features

HP ProtectTools Security Manager
 HP Fingerprint Sensor
 Configuration Control Hardware
 Memory Change Alert
 Ownership Tag
 Setup Password
 Power-On Password
 TPM 1.2 Embedded Security Chip*
 TPM Enhanced DriveLock*
 HP Disk Sanitizer
 HP 3D DriveGuard
 Kensington Lock Slot
 Support for Computrace / LoJack for Laptops (must be purchased separately)

Optional Features

Smart Card Reader Compatible with ISO 7816 compliant Smart Cards
 (replaces Type I/II PC Card PC/SC interface support slot)
HP Privacy Filter Narrows viewing area so that screen data is visible only to persons directly in front of the monitor

***NOTE:** TPM module disabled where use is restricted by law; for example, Russia and China.
 For more information on HP security solutions refer to <http://www.hp.com/go/security>.

Power Supply

External 90-watt Smart AC adapter, 6-foot (1.8-meter) power cord included.
 Total length including external AC adapter is 12 feet (3.66 meter).
 HP Fast Charge*

*HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to 12-cell Ultra-Capacity batteries.

Battery

Primary battery 6-cell (55 WHr) Lithium-Ion battery
Optional HP Extended Life Battery 8-cell (52 WHr) high capacity Lithium-Ion battery
Optional HP Ultra-Capacity Battery 12-cell (95 WHr) high capacity Lithium-Ion battery

Standard Features

Battery Life

Primary battery Up to 5 hours and 15 minutes

Primary battery and optional HP Extended Life Battery Up to 10 hours and 45 minutes

Primary battery and optional HP Ultra-Capacity Battery Up to 14 hours and 30 minutes

NOTE: The listed battery life measurements were taken on models running Microsoft Windows XP Professional. Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

System Standby Time

Up to 1 week

Power Conservation

Supports enhanced Intel SpeedStep technology with Intel Core 2 Duo processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)

Intel Display Power Saving technology

Hibernation

Standby

ACPI compliance

Docking and Stands

HP Advanced Docking Station

HP Basic Docking Station

HP Standard Monitor Stand

HP Adjustable Notebook Stand

HP External MultiBay II

HP's shared docking solutions provide simple and convenient port replication and cable management. Features include Gigabit NIC pass through, modem pass through, legacy parallel and serial ports, S-video TV out, USB 2.0 ports, integrated security mechanism*, integrated MultiBay II and ExpressCard** slots. These docking solutions are compatible across multiple Business Notebook platforms enabling a lower total cost of ownership.

* HP/Kensington Cable Lock required (purchased separately)

** HP 3-in-1 NAS Docking Station and HP Advanced Docking Station only

Service and Support

HP Services offers limited 3- year and 1-year warranty options depending on country; 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. For HP Care Pack services see <http://www.hp.com/go/lookuptool>.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

<http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Select Model(s)



Standard Features

6710b GF929AW#ABA Global	Processor	Intel Core 2 Duo Processor T7500 (2.20-GHz, 800-FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows Vista Business** Office Ready
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel Wireless WiFi Link 4965ABG HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	3 Year Limited Warranty

6710b GF926AW#ABA Global	Processor	Intel Core 2 Duo Processor T7300 (2.00-GHz, 800-FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows Vista Business** Office Ready
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	80-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel Wireless WiFi Link 4965ABG HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD/CD-RW Combo Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter

Standard Features

Warranty 3 Year Limited Warranty

6710b RM407UA#ABA	Processor	Intel Core 2 Duo Processor T8300 (2.4GHz, 800-FSB, 3-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
	Hard Drive	160-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	3 Year Limited Warranty

6710b RM404UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 3-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	160-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA BrightView (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons

Standard Features

Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	1 Year Limited Warranty

6710b
RM403UT#ABA
Smart Buy

Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 3-MB L2 cache)*
Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
Hard Drive	160-GB 5400 rpm SATA HDD
Display	15.4-inch diagonal WXGA BrightView (1280 x 800 resolution)
Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection
Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
Pointing Device	Touchpad with scroll zone, two pick buttons
Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	1 Year Limited Warranty

6710b
RM406UT#ABA
Smart Buy

Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 3-MB L2 cache)*
Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
Hard Drive	120-GB 5400 rpm SATA HDD
Display	15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)
Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)

Standard Features

Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection HP Integrated Module with Bluetooth Wireless Technology
Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
Pointing Device	Touchpad with scroll zone, two pick buttons
Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	3 Year Limited Warranty

6710b RM405UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 3-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA BrightView (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	3 Year Limited Warranty

Standard Features

6710b RM402UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 3-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
	Hard Drive	160-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	3 Year Limited Warranty

6710b RM408UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 3-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 4965AGN; HP Integrated Module with Bluetooth Wireless Technology; Sprint Mobile Broadband (EVDO, Rev A) ***
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive

Standard Features

Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	3 Year Limited Warranty

6710b
RM409UT#ABA
Smart Buy

Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 3-MB L2 cache)*
Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
Hard Drive	120-GB 5400 rpm SATA HDD
Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
Integrated Wireless	Intel PRO/Wireless 4965AGN; HP Integrated Module with Bluetooth Wireless Technology; Verizon Wireless BroadbandAccess (EVDO, Rev A) ***
Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
Pointing Device	Touchpad with scroll zone, two pick buttons
Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	3 Year Limited Warranty

6710b
RM410UT#ABA
Smart Buy

Processor	Intel Core 2 Duo Processor T8100 (2.10-GHz, 800-FSB, 4-MB L2 cache)*
Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
Hard Drive	120-GB 5400 rpm SATA HDD
Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384 MB of shared memory
Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)

Standard Features

Integrated Wireless	Intel PRO/Wireless 4965AGN Network Connection; HP Integrated Module with Bluetooth Wireless Technology; AT&T BroadbandConnect (HSDPA)***
Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
Pointing Device	Touchpad with scroll zone, two pick buttons
Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	3 Year Limited Warranty

6710b RM339UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T7500 (2.20-GHz, 800-FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	160-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA BrightView (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	1 Year Limited Warranty

Standard Features

6710b RM342UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T7500 (2.20-GHz, 800-FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	3 Year Limited Warranty

6710b RM340UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T7500 (2.20-GHz, 800-FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	2048-MB 667-MHz DDR2 SDRAM (2 DIMM)
	Hard Drive	160-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
	Battery	6-cell (55 WHr) Lithium-Ion

Standard Features

Power	External 90-watt Smart AC adapter
Warranty	1 Year Limited Warranty

6710b RM344UA#ABA	Processor	Intel Core 2 Duo Processor T7500 (2.20-GHz, 800-FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WSXGA+ WVA anti-glare (1680 x 1050 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	3 Year Limited Warranty

6710b RM338UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T7250 (2.00-GHz, 800-FSB, 2-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor



Standard Features

Pointing Device	Touchpad with scroll zone, two pick buttons
Optical Drive	DVD/CD-RW Combo Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	1 Year Limited Warranty

6710b
RM345UT#ABA
Smart Buy

Processor	Intel Core 2 Duo Processor T7250 (2.00-GHz, 800-FSB, 2-MB L2 cache)*
Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
Hard Drive	160-GB 5400 rpm SATA HDD
Display	15.4-inch diagonal WXGA BrightView (1280 x 800 resolution)
Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection
Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
Pointing Device	Touchpad with scroll zone, two pick buttons
Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
Battery	6-cell (55 WHr) Lithium-Ion
Power	External 90-watt Smart AC adapter
Warranty	1 Year Limited Warranty

Standard Features

6710b RM343UA#ABA	Processor	Intel Core 2 Duo Processor T7250 (2.00-GHz, 800-FSB, 2-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL Drive
	Battery	6-cell (55 WHr) Lithium-Ion
	Power	External 90-watt Smart AC adapter
	Warranty	1 Year Limited Warranty

6710b RM341UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T7250 (2.00-GHz, 800-FSB, 2-MB L2 cache)*
	Operating System	Genuine Windows Vista® Downgrade to Windows XP Professional w/MS Office (Trial)
	System Memory	1024-MB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	120-GB 5400 rpm SATA HDD
	Display	15.4-inch diagonal WXGA anti-glare (1280 x 800 resolution)
	Graphics	Mobile Intel Graphics Media Accelerator X3100, up to 384-MB shared system memory
	Audio	High Definition Audio w/24-bit DAC line out/headphone and microphone jacks integrated microphone
	Communications	56K Modem Broadcom NetLink Gigabit Ethernet PCI Controller (10/100/1000 NIC)
	Integrated Wireless	Intel PRO/Wireless 3945ABG Network Connection HP Integrated Module with Bluetooth Wireless Technology
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Touchpad with scroll zone, two pick buttons
	Optical Drive	DVD+/-RW SuperMulti DL LightScribe Drive
	Battery	6-cell (55 WHr) Lithium-Ion

Standard Features

Power

External 90-watt Smart AC adapter

Warranty

3 Year Limited Warranty

*Intel's numbering is not a measurement of higher performance.

** At initial boot, either 32- or 64-bit can be selected. This is a one time selection and the other version will be deleted.

*** Wireless use requires separately purchased service contract. Check with service provider for availability and coverage in your area.

Memory

667-MHz DDR2 SDRAM
Two DIMM slots supporting dual channel memory
DIMM sizes supported: 512 MB, 1024 MB, 2048 MB

- Standard Memory
- 512 MB (512 MB x 1)
 - 1024 MB (1024 MB x 1 or 512 MB x 2)
 - 2048 MB (2048 MB x 1 or 1024 MB x 2)
 - 4096 MB (2048 MB x 2)

Optional Memory Upgrades

Support for up to 4096 MB of memory is available (with the installation of optional DDR2 SDRAM memory kits). Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
1024 MB	1024 MB	Empty
1024 MB	512 MB	512 MB
1536 MB	1024 MB	512 MB
2048 MB	1024 MB	1024 MB
4096 MB	2048 MB	2048 MB

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Memory Upgrades	HP 512-MB (DDR2 667 MHz) SODIMM	EM993AA
	HP 1024-MB (DDR2 667 MHz) SODIMM	EM994AA
	HP 2048-MB (DDR2 667 MHz) SODIMM	EM995AA

Storage

Removable Media Drive Support

	Quantity Supported	Drive Bay
DVD/CD-RW Combo Drive	One	Fixed optical drive bay
DVD+/-RW SuperMulti DL Drive	One	Fixed optical drive bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Fixed optical drive bay

Hard Drive Support

	Quantity Supported	Drive Bay
Primary Hard Drives		
160-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
120-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
120-GB 7200 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 7200 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	1.4 in (at front) x 14.1 in x 10.4 in 34.9 mm (at front) x 357.0 mm x 265.0 mm
	Weight	5.7 lb (2.59 kg)
	NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, 80-GB hard drive, and optical drive. Weight varies by configuration and components.	
	Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage 18.5 V Average Operating Power 12.5 W Max Operating Power < 90 W
	Temperature	Operating 32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical) Non-operating -4° to 140° F (-20° to 60° C)
	Relative Humidity	Operating 10% to 90%, non-condensing Non-operating 5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
	Shock	Operating 125 G, 2 ms, half-sine Non-operating 200 G, 2 ms, half-sine
	Random Vibration	Operating 0.75 grms Non-operating 1.50 grms
	Altitude (unpressurized)	Operating -50 to 10,000 ft (-15.24 to 3,048 m) Non-operating -50 to 40,000 ft (-15.24 to 12,192 m)
	Industry Standard Certifications	UL Yes CSA Yes FCC Compliance Yes ENERGY STAR® 4.0 Yes ICES Yes GS Yes Australia / NZ A-Tick Compliance Yes CCC Yes Japan VCCI Compliance Yes MIC Yes BSMI Yes CE Marking Compliance Yes BNCI or BELUS Yes CIT Yes GOST Yes Saudi Arabian Compliance (ICCP) Yes SABS Yes UKRSERTCOMPUTER Yes

Technical Specifications

For accessibility information on HP products, please visit <http://www.hp.com/accessibility>.

HP 90W Smart AC Adapter	Dimensions	5.24 x 2.28 x 1.1 in (13.3 x 5.8 x 2.9 cm)
	Weight	0.86 lb (390 g)
	Input	100 to 240 VAC
		Input Efficiency 83% min at 115 VAC
		Input frequency range 47 to 63 Hz
	Output	Input AC current 1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version 2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
		Output power 90W
		DC output 18.5V
		Hold-up time 5 msec at 115 VAC input
	Connector	Output current limit <11A, Over voltage protection- 29V max automatic shutdown
		3 pin/grounded, mates with interchangeable cords
	Environmental Design	Operating temperature 32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature -4° to 149° F (-20° to 65° C)
		Altitude 0 to 10,000 ft (0 to 3,048 m)
		Humidity 20% to 80%
	EMI and Safety Certifications	Storage Humidity 10% to 90%
		CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF- over 200,000 hours at 25°C ambient condition.

Optional HP Ultra-Capacity Battery	Dimensions (H x W x L)	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)
	Weight	1.77 lb (0.803 kg)
	Cells/Type	12-cell Lithium-Ion
	Energy	Watt-hour Capacity 95Wh
		Operating (Charging) 32° to 113° F (0° to 45° C)
	Temperature	Operating (Discharging) 14° to 140° F (-10° to 60° C)
		Non-operating -4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	Smart Adapter 3 to 4 hours
		System ON 4 to 5 hours (depending on system power consumption)
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery

Technical Specifications

Optional HP Extended Life Battery	Dimensions (H x W x L)	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)	
	Weight	1.00 lb (0.455 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Watt-hour Capacity	52Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	3 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge	Charges the battery up to 90% within 90 minutes when system is OFF
Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery		

6-Cell (55Whr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)	
	Weight	0.737 lb (0.335 kg)	
	Cells/Type	6-cell Lithium-Ion	
	Energy	Watt-hour Capacity	55Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge	Charges the battery up to 90% within 90 minutes when system is OFF

Technical Specifications

15.4-inch WSXGA+ wide-viewing angle, anti-glare	Dimensions (W x H)	13.0 x 8.1 in (33.1 x 20.7 cm)	
	Diagonal Size	15.4 in (39.1 cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.197 mm
		Format	1680 x 1050
		Configuration	RGB stripe
	Backlight	CCFL	
	PPI	129	
	Viewing Angle	±60° Horizontal, ± 50° Vertical (minimum)	

15.4-inch WXGA anti-glare	Active Area (W x H)	13.0 x 8.1 in (33.1 x 20.7 cm)	
	Diagonal Size	15.4 in (39.1 cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.259 mm
		Format	1280 x 800
		Configuration	RGB stripe
	Backlight	CCFL	
	PPI	98	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum)	

Technical Specifications

15.4-inch WXGA BrightView	Active Area (W x H)	13.0 x 8.1 in (33.1 x 20.7 cm)	
	Diagonal Size	15.4 in (39.1 cm)	
	Surface Treatment	BrightView	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.259 mm
		Format	1280 x 800
		Configuration	RGB stripe
	Backlight	CCFL	
	PPI	98	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum)	

Hard Drives

120-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	120 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	234,441,648	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

80-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)
	Capacity	80 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-7 / SATA 1.0a
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track 1 ms
		Average 10 ms
		Maximum 18 ms
	Rotational Speed	7200 rpm
	Logical Blocks	156,301,488
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]
	Features	ATA Security

160-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)
	Capacity	160 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-7 / SATA 1.0a
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track 3 ms
		Average 13ms
		Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	312,581,808
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]
	Features	ATA Security

Technical Specifications

120-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)
	Capacity	120 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-7 / SATA 1.0a
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track 3 ms
		Average 13ms
		Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	234,441,648
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]
	Features	ATA Security

80-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)
	Capacity	80 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-7 / SATA 1.0a
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track 3 ms
		Average 13 ms
		Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	156,301,488
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]
	Features	ATA Security

Removable Storage Drives

Technical Specifications

DVD/CD-RW Combo Drive	Access Times	Random	<110 ms CD
			<130 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		24X CD-RW	3,600 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	700 MB	
	Transport	Tray loading	

DVD+/-RW SuperMulti DL Drive	Access Times	Random	<175 ms CD
			<230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		16X CD-RW	2,400 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
		5X DVD-RAM	6,750 KB/s
	Transfer Mode	Multiword DMA Mode	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Technical Specifications

DVD+/-RW SuperMulti DL LightScribe Drive	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		16X CD-RW	2,400 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
		5X DVD-RAM	6,750 KB/s
	Transfer Mode	Multiword DMA Mode	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
HP Fingerprint Sensor	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	
HP Fingerprint Sensor	Mobile Voltage Operation	3.0V–3.6V Single Supply	
	Operating Temperature	32° – 158°F (0° – 70°C)	
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling	
		Less than 25 mA hardware finger detection	
		Advanced Power Management	
	High-Rate Image Capture	Up to 240 image frames /sec	
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)	
Detection Matrix		192 x 16 Pixels	
		9.7 mm x 0.81 mm	
		500 ppi High-Resolution Images	

Audio



Technical Specifications

Hardware	Implementation	ADI1981HD High Definition CODEC
	Touch-Sensitive Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Sound Blaster Pro compatible	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Communications

Integrated Broadcom NetLink Gigabit Ethernet Controller (10/100/1000 NIC)	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
		100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
		1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)
		Auto-Negotiation (Automatic Speed Selection)
		Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
		IEEE 802.1p QoS (Quality of Service) Support
	Power Management	IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
		ACPI compliant -- multiple power modes
		Situation-sensitive features reduce power consumption
		TCP/IP/UDP Checksum Offload (configurable)
Performance Features Manageability		Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)
		PXE 2.1 Remote Boot
		Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
		Comprehensive diagnostic and configuration software suite

Technical Specifications

Interface	PCI Express x1
NIC Device Driver Name	Broadcom NetLink Gigabit Ethernet
Drivers Available	Microsoft Windows Vista Microsoft Windows XP

V.92 56K Data/Fax Modem Form Factor	MDC 1.5 Daughtercard
Power Management Support	APM Revision 1.2, ACPI
Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
Data Mode Capabilities	V.92 data V.8bis V.80 V.44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

Technical Specifications

HP ev2200 1xEV-DO Broadband Wireless Module	Band and Power Class	0 (North American Cellular) – Class III; 1 (North American PCS) – Class II
	Wireless Protocol Standards	CDMA 1x Release 0/A; IS-95A, IS-95B, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Interoperability	CDG 22 (TIA/EIA/IS-95-A) CDG 53 (TIA/EIA/IS-95-B) C.S0031 (TIA/EIA/IS-2000) CDG 64 (TIA/EIA/IS-2000) C.S0032 (TIA/EIA/IS-866)
	Frequency Band	Dual Band: 850 MHz (Cellular) and 1900 MHz (PCS)
	Data Rates (Packet Mode)	IS-856 rates up to 2.4 Mbps IS-2000 data rates up to 307.2 kbps
	Maximum Output Power	24dBm (+/-1)
	Power Consumption (maximum)	500mA
	Power Consumption, Sleep Mode	1.7mA – 3.5mA
	Power Management	USB selective suspend CDMA slotted mode sleep and dormant modes
	Antenna Type	High efficiency dual band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard
	Weight	0.35 oz (10 g)
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 4.5 mm)
	Voltage, Operating	3.3v +/- 10%
	Temperature, Operating (from TIA/EIA/IS-98-D)	–22° to 140° F (–30° to 60° C) (full RF performance) –22° to 167° F (–30° to 75° C) (reduced RF performance)
	Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)
	Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	Configuration Utilities	Verizon Wireless VZAccess Manager
	LED Activity	LED Off – Radio Off; Solid LED On – Radio On
HP hs2300 HSDPA Broadband Wireless Module	Frequency Bands and Power Class	850/1900/2100MHz WCDMA Power class 3 (+24dBm) 850MHz GSM/GPRS/EDGE 900MHz GSM/GPRS/EDGE, 1800MHz GSM/GPRS/EDGE 1900MHz GSM/GPRS/EDGE

Technical Specifications

	EDGE E2 power GPRS/EDGE Multislot Class 12 GPRS PCS/DCS power class 1 GSM power class 4
Wireless Protocol Standards	GPRS/EDGE: 3GPP R99 GERAN P1 WCDMA Release 5 (R5) High-Speed Downlink Packet Access (HSDPA) 3.6Mbps GSM Phase 2+
Wireless Parametric Standards	Complies with 3GPP specifications
Additional Standards Compliance	FCC parts 15/22/24, CE, Microsoft WHQL, R&TTE directive 1999/5/EC (health, safety, EMC, spectrum), GCF-CC (Module), European Union Directive 2002/95/EC (restrictions of the use of certain Hazardous Substances (RoHS) in electronic equipment), Infrastructure Interoperability Testing (IOT)
Data Rates (Packet Mode)	Designed maximum data rate: EDGE 118 kbps UL / 236 kbps DL UMTS 384 kbps UL / 384 kbps DL HSDPA 384 kbps UL / 3.6 Mbps DL
Chipset and Module	Qualcomm MSM6280 chipset; Sierra Wireless MC8775 module
Maximum Output Power	32 dBm (+/-2) GSM/EDGE GMSK mode
Power Consumption (maximum)	800mA
Power Consumption, Sleep Mode	4 – 8mA
Power Management	USB Selective Suspend sleep and standby mode
Antenna Type	High efficiency 5- band antennae, mounted in the display enclosure
Form Factor	PCI-Express MiniCard
Weight	0.35 oz (10 g)
Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 4.5 mm)
Voltage, Operating	3.3v +/- 10%
Temperature, Operating	–22° to 140° F (–30° to 60° C) (full RF performance) –22° to 167° F (–30° to 75° C) (reduced RF performance)
Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)
Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
LED Activity	LED Off – Radio Off; Solid LED On – Radio On
Configuration Utilities	Varies per country and mobile network operator

**Intel PRO/Wireless
3945ABG Network**

Wireless LAN Standards IEEE 802.11a
IEEE 802.11b



Technical Specifications

Connection

Interoperability	IEEE 802.11g Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 2000 and XP (details at http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK)²	15 dBm
Output Power (for OFDM; power varies by data rate)²	15 dBm
Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode ³ : 150 mW (nominal) Sleep mode: 30 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm, 1 Mbps: -97 dBm
Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance
Range	802.11 a – Typical (@6 Mbps) 600 feet – Outdoor Open Area 150 feet – Indoor, Office environment 802.11 b – Typical (@1 Mbps) 1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment 802.11 g – Typical (@1 Mbps) 1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard
Weight	0.013 lb (6 g)
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%
Temperature	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)

Technical Specifications

Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Microsoft Windows 2000 or XP Choice of Configuration Utility:	
	• Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet for Microsoft Windows 2000 or XP (required for Cisco Compatible Extensions support)	
	Microsoft Windows Vista	
LED Activity	• Microsoft Windows Vista Wireless Network Connection Manager	
	LED Off – Radio OFF; Solid LED On – Radio ON	

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows 2000 or XP. WLAN may also be compatible with certain third-party software suppliers.

Intel Wireless WiFi Link 4965AGN

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n (draft 1.02)
Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows 2000 and XP (details at http://www.hp.com/go/notebooks/WLAN) Tested with wireless access points from several major manufacturers (details at http://www.hp.com/go/notebooks/WLAN/draft-n)
Frequency Band	2.4 GHz and 5 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n (draft): 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n (draft) specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows 2000 and XP only.

Technical Specifications

Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CKK) ²	15 dBm	
Output Power (for OFDM; power varies by data rate) ²	15 dBm	
Power Consumption	Transmit: 2.3 Watts (average, with two spatial streams) Receive: 1.9 Watts (average with three receive chains) Idle mode ³ : 30 mW (average) Radio off: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ⁴	300 Mbps: -68 dBm, 54 Mbps: -74 dBm, 6 Mbps: -90 dBm	
Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)

Technical Specifications

Configuration Utility⁵

Microsoft Windows 2000 or XP
Choice of Configuration Utility:

- Microsoft Windows XP Wireless Network Connection Manager
- Intel PROSet for Microsoft Windows 2000 or XP (required for Cisco Compatible Extensions support)

Microsoft Windows Vista

- Microsoft Windows Vista Wireless Network Connection Manager

LED Activity

LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows 2000 or XP. WLAN may also be compatible with certain third-party software supplicants.

Intel Wireless WiFi Link 4965AG

Wireless LAN Standards

IEEE 802.11a
IEEE 802.11b
IEEE 802.11g

Interoperability

Wi-Fi certified
Cisco Compatible Extensions Program compliant with Microsoft Windows 2000 and XP (details at <http://www.hp.com/go/notebooks/WLAN>)

Frequency Band

2.4 GHz and 5 GHz

Data Rates

802.11b: 1, 2, 5.5, 11 Mbps
802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

Modulation

Direct Sequence Spread Spectrum
DBPSK, DQPSK, CCK, OFDM

Security¹

Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.

Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows 2000 and XP only.

Sub-channels

Multinational support with frequency bands and channels compliant to local regulations.

Media Access Protocol

CSMA/CA (Collision Avoidance) with ACK

Network Architecture Models

Ad-hoc (Peer to Peer)
Infrastructure (Access Point Required)

Roaming

IEEE 802.11 compliant roaming between access points

Output Power (for CKK)²

15 dBm

Output Power (for OFDM; power varies by data rate)²

15 dBm

Technical Specifications

Power Consumption	Transmit: 1.6 Watts (average) Receive: 1.1 Watts (average) Idle mode ³ : 30 mW (average) Radio off: 20 mW (max)							
Power Management	ACPI compliant power management 802.11 compliant power saving mode							
Receiver Sensitivity⁴	54 Mbps: -74 dBm, 6 Mbps: -90 dBm							
Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance							
Range	<table><tr><td>802.11 a – Typical (@6 Mbps)</td><td>600 feet – Outdoor Open Area 150 feet – Indoor, Office environment</td></tr><tr><td>802.11 b – Typical (@1 Mbps)</td><td>1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment</td></tr><tr><td>802.11 g – Typical (@1 Mbps)</td><td>1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment</td></tr></table>		802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment							
802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment							
802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment							
Form Factor	PCI-Express MiniCard							
Weight	0.013 lb (6 g)							
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)							
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%							
Temperature	<table><tr><td>Operating</td><td>32° to 176° F (0° to 80° C)</td></tr><tr><td>Non-operating</td><td>-40° to 176° F (-40° to 80° C)</td></tr></table>		Operating	32° to 176° F (0° to 80° C)	Non-operating	-40° to 176° F (-40° to 80° C)		
Operating	32° to 176° F (0° to 80° C)							
Non-operating	-40° to 176° F (-40° to 80° C)							
Humidity	<table><tr><td>Operating</td><td>10% to 90% (non-condensing)</td></tr><tr><td>Non-operating</td><td>5% to 90% (non-condensing)</td></tr></table>		Operating	10% to 90% (non-condensing)	Non-operating	5% to 90% (non-condensing)		
Operating	10% to 90% (non-condensing)							
Non-operating	5% to 90% (non-condensing)							
Altitude	<table><tr><td>Operating</td><td>0 to 10,000 ft (3,048 m)</td></tr><tr><td>Non-operating</td><td>0 to 50,000 ft (15,240 m)</td></tr></table>		Operating	0 to 10,000 ft (3,048 m)	Non-operating	0 to 50,000 ft (15,240 m)		
Operating	0 to 10,000 ft (3,048 m)							
Non-operating	0 to 50,000 ft (15,240 m)							
Configuration Utility⁵	Microsoft Windows 2000 or XP Choice of Configuration Utility: • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet for Microsoft Windows 2000 or XP (required for Cisco Compatible Extensions support) Microsoft Windows Vista • Microsoft Windows Vista Wireless Network Connection Manager							
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON							
1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode and on battery power. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows 2000 or XP. WLAN may also be compatible with certain third-party software supplicants.								

**Broadcom 4311AG
802.11a/b/g WiFi Adapter**

Wireless LAN Standards IEEE 802.11a
IEEE 802.11b
IEEE 802.11g



Technical Specifications

Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 2000 and XP (details at http://www.hp.com/go/notebooks/WLAN)	
Frequency Band	2.4 GHz and 5 GHz	
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM	
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK)²	17.5 dBm	
Output Power (for OFDM; power varies by data rate)²	15 dBm	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode ³ : 390 mW (nominal) Sleep mode: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm, 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)

Technical Specifications

Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Microsoft Windows 2000 or XP Choice of Configuration Utility:	
	• Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)	
	Microsoft Windows Vista	
LED Activity	• Microsoft Windows Vista Wireless Network Connection Manager	
	LED Off – Radio OFF; Solid LED On – Radio ON	
	1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows 2000 or XP. WLAN may also be compatible with certain third-party software supplicants.	

HP Integrated Module with Bluetooth Wireless Technology

Bluetooth Specification	2.0 Compliant
Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 264 mW
	Peak (Rx) 231 mW
	Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant
	Microsoft Windows Plug and Play compliant
OS Support	Genuine Windows Vista
	Genuine Windows XP

Technical Specifications

	Genuine Windows 2000	
Bluetooth Software Supported	Broadcom Bluetooth for Windows	
	Microsoft Windows XP Bluetooth Software	
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves	
Security	Full support of Bluetooth Security Provisions	
Power Management	Microsoft Windows ACPI, and USB Bus Support	
	Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
Certifications	All necessary regulatory approvals for supported countries, including:	
	FCC (47 CFR) Part 15C, Section 15.247 & 15.249	
	ETS 300 328, ETS 300 826	
	Low Voltage Directive IEC950	
	UL, CSA, and CE Mark	
Temperature	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90%
	Non-operating	5% to 95%
Altitude	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software)	
	Serial Port Profile (SPP)*	
	Dial-Up Networking (DUN)*	
	Generic Object Exchange Profile (GOEP)	
	Object Push Profile (OPP)*	
	File Transfer Profile (FTP)	
	Synchronization Profile (SYNC)	
	Hard Copy Cable Replacement (HCRP)*	
	Personal Area Networking Profile (PAN)*	
	Human Interface Device Profile (HID)*	
	FAX Profile (FAX)	
	Basic Imaging Profile (BIP)	
	Headset Profile (HSP)	
	Hands Free Profile (HFP)	
	Advanced Audio Distribution Profile (A2DP)	

* indicates the profile is also supported by Microsoft Windows XP SP2

Technical Specifications

Environmental Data

Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- ENERGY STAR 4.0
- US Federal Energy Management Program (FEMP)
- Taiwan Green Mark
- China Energy Conservation Program (CECP)
- IT ECO declaration
- Korean Eco Label

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook"

Energy Consumption

115 VAC

230 VAC

100 VAC

Normal Operation

13.92 W

13.95 W

13.65 W

Sleep (Energy Star low power mode)

0.9 W

1.11 W

0.87 W

Off

1.19 W

1.4 W

1.18 W

Heat Dissipation*

115 VAC

230 VAC

100 VAC

Normal Operation

47.495 BTU/hr

47.597 BTU/hr

46.573 BTU/hr

Sleep

3.07 BTU/hr

3.787 BTU/hr

2.968 BTU/hr

Off

4.06 BTU/hr

4.776 BTU/hr

4.026 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

Sound Power

(LWAd, bels)

Sound Pressure

(LpAm, decibels)

Idle

3.1

21.4

Operating mode (HDD)

3.1

22.2

Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000 ppm by weight.

The battery type and chemistry used in the product is:

CR2032 (coin cell), Lithium

6 cell rechargeable Lithium-Ion battery; optional 8 cell Lithium-Ion battery available

Additional

This product is in compliance with the EU Restrictions of Hazardous

Technical Specifications

information:

Substances (RoHS) Directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412

Input devices of this product comply with ISO 9241, part 9.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% recycled materials (by wt.)

This product is greater than 95% recyclable when properly disposed of at end of life.

Packaging Materials

- Corrugated / Paper – 2.41 lb (1094 g)
- EPE Foam – 0.112 lb (51 g)
- LDPE Bag – 0.011 lb (5 g)
- The corrugated paper packaging materials contains at least 40% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium

Technical Specifications

- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management and Recycling

HP offers our customers several other options for handling their aging computers while also minimizing the impact on the environment—including product trade-in and leasing services—in addition to recycling services.

Please go to: <http://www.hp.com/recycle>

or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2008 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core 2 Duo and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.