




## In-Line Surge Protector, 10BASE-T, RS-422/423

# Get convenient in-line surge protection for your 10BASE-T /RS-422 connection.

Put avalanche diode and thyristor protection where you need it.

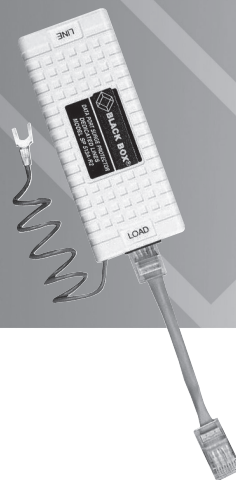

### Specifications

**Application:** 10BASE-T / RS-422, RS-423

**Ground Wire:** Yes

**Insertion Loss at 40 MHz:** <1 dB

**Maximum Shunt Capacitance:** <40 pF

**Peak Pulse Current:** 132 amps

**Pins Protected:** All

**Protection Type:** Avalanche diode and thyristor technology

**Response Time:** <5 ns

**Standard Clamping Voltage:** 7.5 volts

**Connectors:** (2) RJ-45 F

### Overview

This surge protector protects 10BASE-T RS-422 interfaces that use an RJ-45 connection.

### What's included

- In-Line Surge Protector
- RJ-45 patch cable
- Specification sheet

For installation instructions, turn this page over...

### Customer Support Information

Order toll-free in the U.S.: Call 877-877-BBOX (outside U.S. call 724-746-5500)  
 FREE technical support 24 hours a day, 7 days a week: Call 724-746-5500 or fax 724-746-0746  
 Mailing address: Black Box Corporation, 1000 Park Drive, Lawrence, PA 15055-1018  
 Web site: [www.blackbox.com](http://www.blackbox.com) • E-mail: [info@blackbox.com](mailto:info@blackbox.com)

## Installation Steps

1. Disconnect the RJ-45 line from the equipment you wish to protect.
2. If the equipment you wish to protect is metal, plug the surge protector into the unit and attach the ground wire to the unit's chassis. If the unit is plastic, connect the ground wire to the electrical outlet ground for the unit.
3. Connect the network-side RJ-45 cable to the surge protector and connect the patch cable included with the surge protector between the surge protector and the equipment you are protecting.



© Copyright 2010. Black Box Corporation. All rights reserved. Printed in U.S.A. Black Box® and the Double Diamond logo are registered trademarks of BB Technologies, Inc. Double Diamond™ is a trademark of BB Technologies, Inc. Any third-party trademarks appearing in this publication are acknowledged to be the property of their respective owners.

SP513A-R2, rev. 1

FREE, live, 24/7 Tech Support is just 30 seconds away.  
724-746-5500 | [blackbox.com](http://blackbox.com)