

Key Features

Stunning 4K Ultra HD Resolution | High Dynamic Range |


Loaded with Connectivity | Ultimate Color Accuracy |

Excellent Screen Uniformity



Product Description


Covering 99% of the Adobe RGB color space and 96% DCI-P3, the ViewSonic® VP2785-4K Ultra HD monitor meets the high color standards of photographers, graphic designers, video editors, print departments, and other design professionals. With a sleek and modern design, the VP2785-4K features future-proof DisplayPort technology, as well as HDMI and USB 3.1 type C ports. To ensure precise, uniform color, each of our monitors is factory calibrated to deliver an amazing Delta E<2 value for superior color accuracy. An integrated color uniformity function ensures consistent chromaticity across the screen, while a 14-bit 3D look-up table generates a stunningly smooth palette of 4.39 trillion colors. What's more, productivity-boosting features include an advanced ergonomic design, a built-in ambient light and presence sensor, and a KVM switch. Hardware calibration is also available with the optional ViewSonic Colorbration Kit, which allows you to quickly and easily calibrate the monitor for photography, graphic design, content creation, and other color-critical applications.

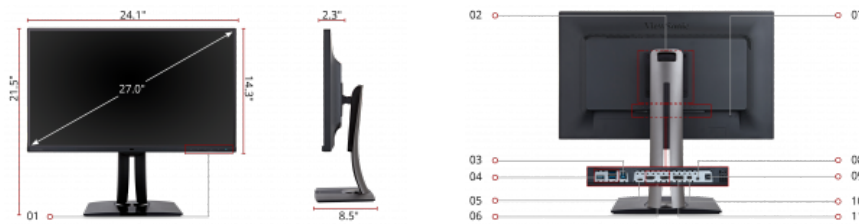

1. Menu Controls
2. VESA Compatible Wall Mount
100 x 100 mm
3. USB Type B

4. USB 3.1 Type A (x3)
5. USB 3.1 Type C
6. HDMI 2.0 (x2)
7. Kensington Lock Slot

8. Audio Out
9. DC In
10. Mini DisplayPort In
11. DisplayPort In



27"
DISPLAY



IPS
PANEL



3840 x 2160
RESOLUTION

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS
Resolution:	3840 x 2160
Static Contrast Ratio:	1000:1
Dynamic Contrast Ratio:	20M:1
Light Source:	WLED
Brightness:	350 cd/m2
Colors:	1.07B
Color Space Support:	10-Bit
Aspect Ratio:	16:9
Response Time (Typical GTG):	14ms
Response Time (GTG w/OD):	7ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Anti-glare, Hard coating (3H)

Compatibility:

PC Resolution (max):	3840 x 2160
Mac® Resolution (max):	3840 x 2160

Connector:

USB 3.1 Type A(3), USB 3.1 Type B(1), USB 3.1 Type C(1), 3.5mm Audio Out(1), HDMI 2.0(2), Display Port(1), Mini Display Port(1)

Power:

Eco Mode (Conserve):	45
Eco Mode (optimized):	55
Consumption (typical):	67
Consumption (max):	70
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	1, 2, 3, 4, 5, Power
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0-40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	DisplayPort (v1.2a) & Mini DP (v1.2a), Type-C: 15 ~130KHz. HDMI (v2.0): 15 ~90KHz
Frequency Vertical:	DisplayPort (v1.2a) & Mini DP (v1.2a), Type-C: 24 ~ 120Hz. HDMI (v2.0): 24 ~120KHz

Video Input:

Digital Sync:	TMDS, PCI-E
---------------	-------------

Ergonomics:

Height Adjust (mm):	130
Swivel:	120°
Pivot:	90°
Tilt (Forward/Back):	5°/21°

Weight (imperial):

Net (lbs):	14.12
Net Without Stand (lbs):	8.65
Gross (lbs):	22.3

Weight (metric):

Net (kg):	6.4
Net Without Stand (kg):	3.92
Gross (kg):	10.13

Dimensions (imperial) (WxHxD):

Packaging (in.):	28.3 x 10.6 x 18.1
Physical (in.):	24.11 x 21.48 x 8.46
Physical Without Stand (in.):	24.11 x 14.28 x 2.26

Dimensions (metric) (WxHxD):

Packaging (mm):	720 x 268 x 460
Physical (mm):	612.4 x 545.51 x 214.96
Physical Without Stand (mm):	612.4 x 362.7 x 57.58

General:

Regulations: UL, cUL, FCC-B, Mexico CoC, EPEAT GOLD, Energy Star, CB, CE, WEEE, RoHS, ErP, REACH.

PACKAGE CONTENTS: LCD Display, AC/DC Adapter, Power Cable(cable length :1.8M), Mini DP to DisplayPort Cable (cable length :1.8M), USB3.0 Up Stream Cable(cable length :1.8M), Quick Start Guide, ViewSonic Wizard CD-Rom

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907902112

Accessories: