



GoSpeak! *Pro*

Voice Amplification

Folding Flat Panel Speakers

Rich Stereo Sound

Ultra-Portable Voice Amplification System


Uses standard power cordLine out for recording or daisy-chaining multiple GoSpeaks

Line input for computer, CD player, Ipod, or output for another GoSpeak

2 Mic. inputs (1 input is combination of XLR and 1/4)

Independent volume controls

Model
VP3320
VP3420
with wireless mic.

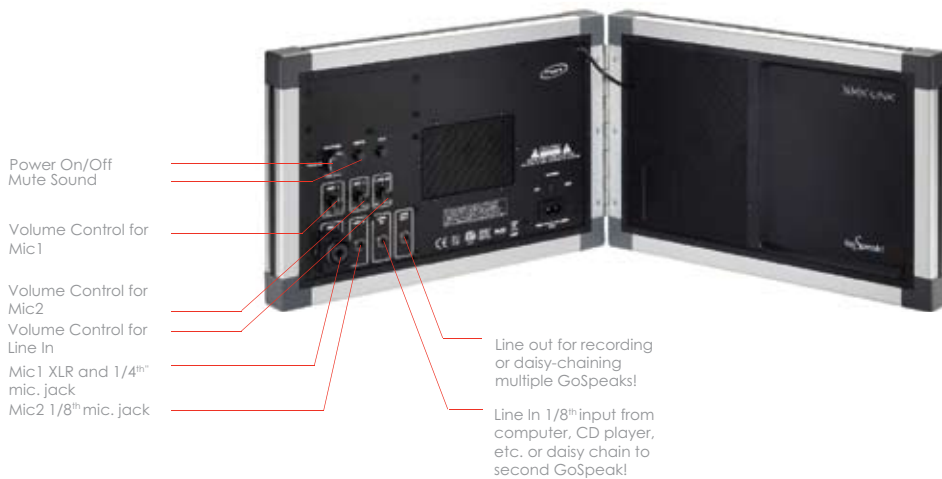

REACH THE AUDIENCE

From your opening remarks to your closing statements GoSpeak! ensures that your message is heard with clarity and power. GoSpeak! delivers the quality voice amplification to reach audiences of up to 200 people, in an astonishingly thin and light design that folds up and is easy to carry with you.

Breakthrough flat panel Surface Sound™ speaker technology from NXT® makes clear and rich omni-directional stereo sound possible in such a small package. Add sound effects and music to your presentation by connecting your computer or other auxiliary audio system.

There is no complicated set-up, just plug in the speaker, connect a microphone and you are ready to start speaking.

So bring along GoSpeak! and start winning over the world...one audience at a time.



Corporate Office:
3601-B Calle Tecate
Camarillo, CA 93012 USA
Phone: (805) 987-6662
Fax: (805) 987-6665
www.smklink.com

©2009 SMK-LINK Electronics Corporation. Interlink Electronics and the six dot logo are trademarks of Interlink Electronics, Inc. and are used under license of SMK-LINK. GoSpeak! and the SMK-LINK Logo are trademarks of SMK-LINK Electronics Corporation. NXT SurfaceSound is a trade mark or registered trade mark of New Transducers Limited in the U.K. US and foreign patents pending. Made in China.

FEATURES

- Evenly distributed sound
- Uniform volume throughout the room
- Less feedback
- Minimal acoustic interference
- Wider listening angle
- More like a human voice
- Two audio inputs with independent volume controls
- Line out port for recording or daisy-chaining multiple GoSpeaks!

SPECIFICATIONS

- Frequency Response: 50Hz - 20KHz±3db
- Line-in Sensitivity: 1Vp-p
- Line Impedance: 20K ohm
- Mic. Input Sensitivity: -64db±1db (0 db=1V/pa)
- Weight: 4.85 Lbs
- Dimensions: 13.4" x 8.7" x 2.6"
- NXT® Technology with surfaceSound™