

GUB431CA1KIT

4-Port USB 2.0 Printer Switch with USB-A to USB-C adapter kit



- Manually or automatically* print to a USB-based printer from up to 4 computers
- Or share a separate USB 2.0 device between PC & Mac without a network setup
- Software-free push-button switching option for sharing other USB devices
- Active-port LEDs indicate which computer has access to the USB device
- Switch-lock prevents others from switching device while ensuring data access consistency

Simple Printer Sharing Without a Network


IOGEAR's 4-Port USB 2.0 Printer Switch Kit allows up to four (4) USB-A or (3) USB-A and (1) USB-C PCs or Macs to share one printer. No more plugging and unplugging between computers or fussing with wireless printer connections.

Automatic Printing

Connect any mix of PCs or Macs and share a printer between each. Set up your automatic printing between each computer through your printer's included software. Simply submit a print job and the printer will automatically print from that computer.

- | | |
|--|---|
| <ul style="list-style-type: none"> • Manually or automatically* print to a USB-based printer from up to 4 computers • Or share a separate USB 2.0 device between PC & Mac without a network setup • Software-free push-button switching option for sharing other USB devices • Active-port LEDs indicate which computer has access to the USB device • Switch-lock prevents others from switching device while ensuring data access consistency | <ul style="list-style-type: none"> • Connect a USB-C PC or Mac via the included USB-A to USB-C adapter cables • Heavy duty, tangle-free design - suited with a braided-nylon fiber cable jacket • USB 2.0 supports data transfer rates up to 480 Mbps & USB 1.1 backward compatible • No external power supply needed |
|--|---|
- * Automatic switch function is software-based and is only available with a USB printer or the printer function of a multi-function printer.



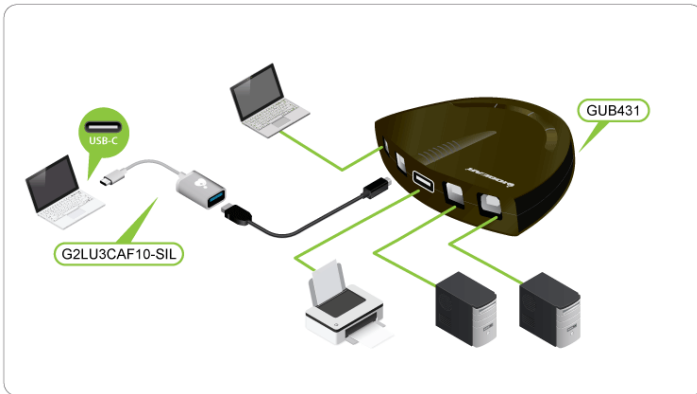

Requirements

Package Contents

- | | |
|--|---|
| <ul style="list-style-type: none"> • For PC Users • Windows XP, Windows Vista, Windows 7, Windows 8.1, Windows 10 • Available USB 2.0 port • Chrome Book • Linux®, Unix and other USB supported systems¹ • • For MAC Users • Mac 8.6 - Mac 10.10. Requires OS X for USB 2.0 support • Available USB 2.0 port | <ul style="list-style-type: none"> • 1 x USB 2.0 Auto Switch • 1 x 6 ft. USB A-C Cable • 1 x User Manual • 1 x Application CD • 1 x Registration / Warranty Card • 1 x G2LU3CAF10-SIL |
|--|---|

¹Additional drivers and support may be needed

Specifications

Function	GUB431CA1KIT	Dimensions	GUB431CA1KIT
Computer Connections		Unit Dimensions	
Direct	USB Type-A	Height	4" (10.16cm)
Connectors		Depth	1.06" (2.69cm)
Device Side	4 x USB-A or 3 x USB-A & 1 x USB-C	Length	3.75" (9.53cm)
Console	1 x USB-A	Unit Package Dimensions	
LEDs		Width	6.5" (16.51cm)
Port Status	Green - Online / Orange - Locked	Height	7.25" (18.42cm)
Host Status	Orange - Online	Depth	2.875" (7.30cm)
Environment		Master Carton	
Humidity	0-80% RH	Width	10" (25.4cm)
Operation Temperature	41 to 104 degree Fahrenheit	Height	7" (17.8cm)
Storage Temperature	-4 to 140 degree Fahrenheit	Depth	4" (10.16cm)
Power Supply	USB Bus powered	Master Carton Qty.	1
Power Consumption	DC 5V, 2.5W	Weight	
Operating System Support	Windows XP and above; Mac: 10.4.5 and above	Master Carton Wt.	1.4lb (0.64kg)
Cable Type	4 x USB 2.0 A-Male to B-Male (for host) + 1 USB-C to USB-A Adapter	Unit Pack Wt.	0.7lb (0.32kg)
		Unit Wt.	0.2lb (0.09kg)