

brother



LAH573001

P-touch EDGE

PT-P750WVP



Thank you for making the decision to purchase the model PT-P750WVP wireless label printer kit. This kit comes with the model PT-P750W wireless label printer, plus a Li-ion rechargeable battery, a full length Flexible ID TZe tape designed for marking cables, wires and fiber with fully laminated wrap around or flag labels, and a hard carrying case that protects and keeps everything together. Compatible with all TZe tapes up to 24mm wide, the PT-P750W is also compatible with the following HGe tapes up to 24mm wide and all HSe heat shrink tubing sizes.

HGe TAPE

3.5mm (0.13in)	6mm (0.23in)	9mm (0.35in)	12mm (0.47in)	18mm (0.7in)	24mm (0.94in)
-------------------	-----------------	-----------------	------------------	-----------------	------------------

HGe Extra-Strength Adhesive Tapes - 5 piece bulk packaging, designed for use on plastics, textured and hard to stick surfaces

BLACK ON WHITE		HGeS2115PK	HGeS2215PK	HGeS2315PK	HGeS2415PK	HGeS2515PK
BLACK ON YELLOW			HGeS6215PK	HGeS6315PK	HGeS6415PK	HGeS6515PK
BLACK ON MATTE SILVER					HGeS9415PK	HGeS9515PK
BLACK ON CLEAR			HGeS1215PK	HGeS1315PK	HGeS1415PK	HGeS1515PK

HGe Standard Adhesive Tapes - General purpose applications

BLACK ON WHITE			HGe2215PK	HGe2315PK	HGe2415PK	HGe2515PK
BLACK ON YELLOW					HGe6415PK	HGe6515PK

HSe TUBE


HSe tube is a printable heat shrink tubing designed to mark cables, fiber and wires.

WARNING: This product contains a chemical known to the State of California to cause cancer.


HEAT SHRINK TUBE WIDTH:	5.8mm (0.23in)	8.8mm (0.34in)	11.7mm (0.46in)	17.7mm (0.69in)	23.6mm (0.92in)
RECOMMENDED FOR (OUTSIDE DIAMETER):	1.7-3.2mm (0.07-0.13in)	2.6-5.1mm (0.10-0.20in)	3.6-7.0mm (0.14-0.28in)	5.4-10.6mm (0.21-0.42in)	7.3-14.3mm (0.28-0.56in)

HSe Heat Shrink Tube - Individual heat shrink tube designed for the model PT-E300, PT-E500, PT-E550w, and PT-P750wvp.
1.5m (4.9ft) long. 2:1 shrink ratio / 300V / 125°C / VW-1

BLACK ON WHITE		HSe211	HSe221	HSe231	HSe241	HSe251
----------------	--	--------	--------	--------	--------	--------

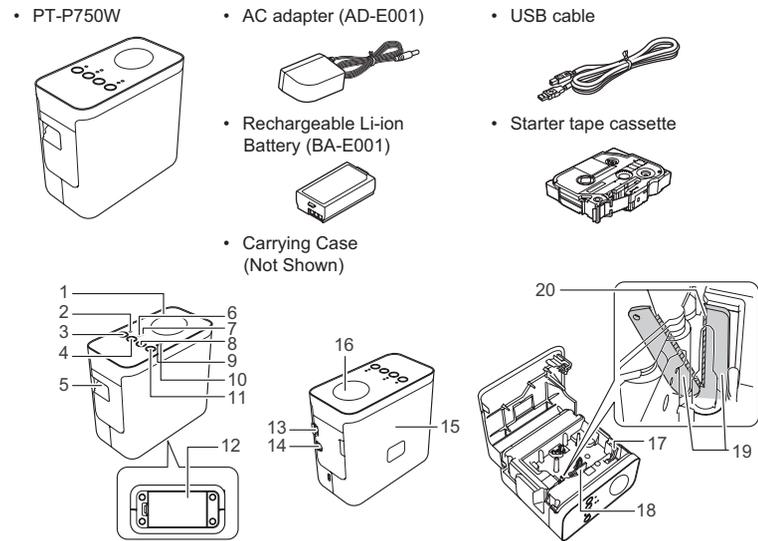

- 1 Top panel
- 2 Editor Lite lamp
- 3 Editor Lite button
- 4 Wireless mode button
- 5 Tape exit slot
- 6 Wi-Fi lamp
- 7 NFC lamp
- 8 Feed & Cut button
- 9 Status lamp
- 10 Battery lamp
- 11 Power button
- 12 Battery cover
- 13 Mini-USB port
- 14 AC adapter connector
- 15 Cassette cover
- 16 NFC tag
- 17 Release lever
- 18 Print head
- 19 Tape cutter
- 20 Cutter blade

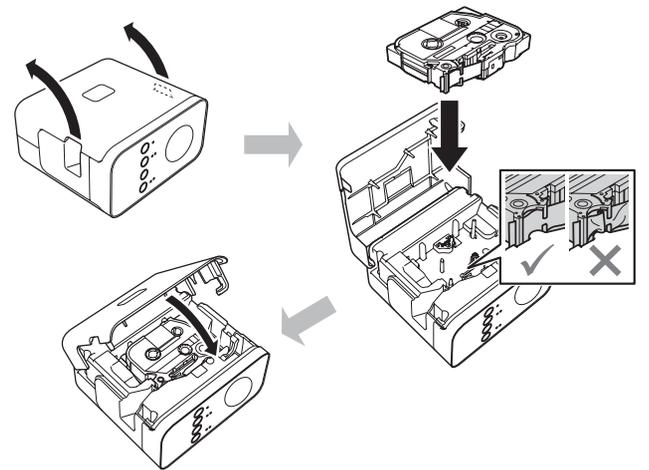

Printing From		Connectivity	Application	Setup	Reference
Mobile Device	Apple iPhone/iPad/iPod touch Android™	Wireless direct Wi-Fi®	Mobile Cable Label Tool	Label creation mobile app that allows you to print directly to your label printer using templates from a smartphone, tablet or other mobile device. Download the mobile app to the mobile device from the Apple App Store or Google Play, and connect your mobile device to the PT-P750W.	"Printing from an iOS/Android™ Device" or refer to the Online User's Guide available from our support site: http://support.brother.com
Computer	Windows® Macintosh	Wi-Fi® or USB	P-touch Editor	Label design and printing software application. Easy to use tools helps you design your custom label, plus import graphic files and add barcodes. Also link to a database file to print labels. Use installer and install the application and printer driver on your computer. Connect PT-P750W. If the Editor Lite LED is ON, press and hold down the Editor Lite button until the LED turns OFF.	Download the installer from http://www.brother.com/inst/ that will load the software, printer driver and save the User's Guide to a "Brother Manuals" folder on your desktop. Download separately from our support site: http://support.brother.com
			P-touch Editor Lite	Simplified version of P-touch Editor software application. No software or printer drivers to load. Connect PT-P750W to your computer. If the Editor Lite LED is OFF, press and hold down the Editor Lite button until the LED turns ON.	Download User's Guide from our support site: http://support.brother.com

Touch-to-Connect

NFC* Connectivity lets you "touch-to-connect" from most NFC-capable mobile devices



*Near Field Communications
See www.brother-usa.com/nfc for a list of compatible mobile devices.

Printing from an Apple iPhone/iPad/iPod touch / Android Device

- ① Setup the printer by following the instructions **1** to **4** in the included User's Guide and then turn on the printer.
- ② Press and hold the  button until the Wi-Fi LED is ON. After you release the button, the NFC LED turns ON and the Wi-Fi LED flashes.
- ③ Turn on the Wi-Fi function on your Apple iPhone/iPad/iPod touch / Android device.

- ④ Download and install the Mobile Cable Label Tool from the Apple App Store (<https://itunes.apple.com/us/app/mobile-cable-label-tool/id898132498?mt=8>) / Google Play (<https://play.google.com/store/apps/details?id=com.brother.ptouch.cablelabel&hl=en>) to your mobile device and open it.

 **Brother Mobile Cable Label Tool** 

NOTE: Internet connection is required to initially download each label template file from the Brother cloud storage that will be saved to your mobile device.

NOTE: If your mobile device supports NFC, activate the NFC function on your Android™ device and touch it to the circular NFC pad on the PT-P750W label printer.

- ⑤ Select the printer in the Mobile Cable Label Tool app and connect your mobile device to the label printer.

Select "PT-P750W" or "DIRECT-brPT-P750W****"

When the password (network key) is required, input "00000000".

NOTE: If your mobile device supports NFC, activate the NFC function on your Android™ device and touch it to the circular NFC pad on the PT-P750W label printer.

- ⑥ Print a label from Mobile Cable Label Tool

Select type of label application by first choosing by category (General/Heat Shrink Tube, Faceplate, Cable Wrap, Cable Flag, Patch Panel, Punch-Down Block) and then by sub-categories until you find the desirable label template

Touch the data you want to change and type in the correct data in the edit box. Press "Done" to change and preview the finished label.

Press the green "Print" button at the bottom to print the label.

NOTE: Internet connection is required to initially download each label template file from the Brother cloud storage that will be saved to your mobile device.

Trademarks and Copyrights

BROTHER is either a trademark or a registered trademark of Brother Industries, Ltd. P-TOUCH is a trademark or registered trademark of Brother Industries, Ltd. ©2015 Brother Industries, Ltd. All rights reserved.

Microsoft, Windows Vista, Windows Server and Windows are either registered trademarks or trademarks of Microsoft Corp. in the United States and/or other countries. Apple, Macintosh, Mac OS are trademarks of Apple Inc., registered in the United States and other countries. Android is a trademark of Google Inc. Google Play is a trademark of Google Inc. Wi-Fi and Wi-Fi Alliance are registered trademarks of the Wi-Fi Alliance. WPA, WPA2, Wi-Fi Protected Setup, Wi-Fi Protected Setup logo and Wi-Fi Direct are trademarks of the Wi-Fi Alliance. The names of other software or products used in this guide are trademarks or registered trademarks of the respective companies that developed them. Each company whose software title is mentioned in this guide has a Software License Agreement specific to its proprietary programs. Any trade names and product names of companies appearing on Brother products, related documents and any other materials are all trademarks or registered trademarks of those respective companies.