

# Wyse® X class™

Secure, accessible cloud client computing has arrived.

**WYSE**  
| | | |

THE GLOBAL LEADER IN  
CLOUD CLIENT COMPUTING



Wyse X class: **All you need to know. Here.**



# Introducing the Wyse X class

**Now you can get all of the security you crave – with all the access, flexibility and performance you need. Wherever you chose to work.**

Wyse X class comes in two neat profiles. Both of them ideal for today's busy and increasingly demanding mobile workforce: There's the Wyse X class c family with an 11" LED backlit display. It features a choice of Suse Linux, Windows Embedded Standard 2009 & 7 operating systems and Wyse WSM for provisioned environments. And the new next-generation Wyse X class m family mobile thin client powerhouse.

It features Windows Embedded Standard 2009 and 7, a crisp 14" LED backlit display and a Dual Core high performance and graphics-combined CPU – delivering excellent HD multimedia capabilities, as well as advanced SuperSpeed USB 3.0 connectivity.

Altogether the Wyse X class puts secure, high performance, mobile cloud computing into the hands of those users who need it most.

## Here's the full range:



### Wyse X50c

The security of Wyse Enhanced SUSE Linux in a compact mobile thin client



### Wyse X90cw

Small form factor, mobile thin client with Microsoft Windows Embedded Standard 2009.



### Wyse X90c7

Harnesses the rich user experience of new Microsoft Windows Embedded Standard 7 in a compact mobile form factor.



### Wyse X00c

All the benefits and power of a Wyse desktop cloud PC in compact mobile form with Wyse WSM.



### Wyse X90mw

New 14" next generation dual core high-performance mobile thin client featuring Windows Embedded Standard 2009.



### Wyse X90m7

New 14" next generation dual core high-performance mobile thin client featuring Windows Embedded Standard 7.



Start

Models

Features

Technical

Contact

Print

# Features Wyse X class

Wyse X class mobile thin clients feature all the benefits of the Wyse Cloud Client Computing range - including the absence of hard drives. A vital benefit for mobile workers who regularly work with sensitive data in insecure environments. Equipped with a Wyse X class they remain both productive and mobile – with all their data safely stored and accessed from secure virtual desktop servers – eliminating the risk of data-loss from stolen or mislaid laptops.

Performance



X class c family Connectivity



X class m family Connectivity



Green



Thin Client Management



Cloud PC Provisioning



User Experience Optimization



User Experience Acceleration



Wyse Enhanced SUSE Linux



Microsoft Windows Embedded Standard 2009



Microsoft Windows Embedded Standard 7



Take a tour of the  
Wyse X class



Start

Models

Features

Technical

Contact

Print

# Performance

## High performance and security on the move

The Wyse X class mobile cloud clients feature high-performance energy conserving processors: The Intel Atom Z520 in the Wyse X class c family and AMD G-Series T-56N Dual Core processor in the X class m family, giving your mobile users all the processing power and flexibility they need including rich multimedia playback.

Both feature bright LED backlit displays delivering excellent on-screen performance for graphics applications and multimedia presentations.

### No hard drives. No worries.

Their hard drive-free design contributes to a far longer lifespan than other comparative laptops. And of course no hard drive means no data whatsoever is lost or compromised if a Wyse X class is stolen or mislaid.

Finally, everything's encased in slim, robust designs ideal for today's hard working and pressurized mobile workers.

### Wyse X class c family



#### Intel Atom Z520 1.33GHz processor

Intel's smallest and lowest power processor to date, the Intel® Atom™ processor has been specifically designed for the new wave of compact, lightweight, high performance mobile cloud clients like the Wyse X class c family.

### Wyse X class m family



#### AMD Fusion FAMILY OF APUS EMBEDDED TECHNOLOGY

#### AMD G-Series T-56N Dual Core processor

The AMD Embedded G-Series platform is the world's first low power processor and advanced GPU that's integrated into a single embedded Accelerated Processing Unit (APU).

Continue tour



Start

Models

Features

Technical

Contact

Print

# Connectivity Wyse X class c family

Wyse X50c, X90cw and X90c7 mobile thin clients and X00c mobile cloud PC

Built-in 1.3 Mega Pixel Camera and Microphone\*



11" LED backlit display

## Well connected

One VGA-type video output

Two USB 2.0 ports

Audio In: 1/8-inch mini jack,  
8 bit stereo microphone

Audio Out: 1/8-inch mini jack,  
full 16 bit stereo

Media slot 4-in-1  
(MS/MS-Pro/SD/MMC)  
for additional storage

One USB 2.0 port

10/100 Base-T  
Ethernet port

Integrated wireless 802.11 b/g/n



Kensington  
Lock Slot

\* Camera and bluetooth option are currently not supported on X50c.

Continue tour



Start

Models

Features


Technical

Contact

Print

# Connectivity Wyse X class m family

## Wyse X90mw and X90m7 mobile thin clients

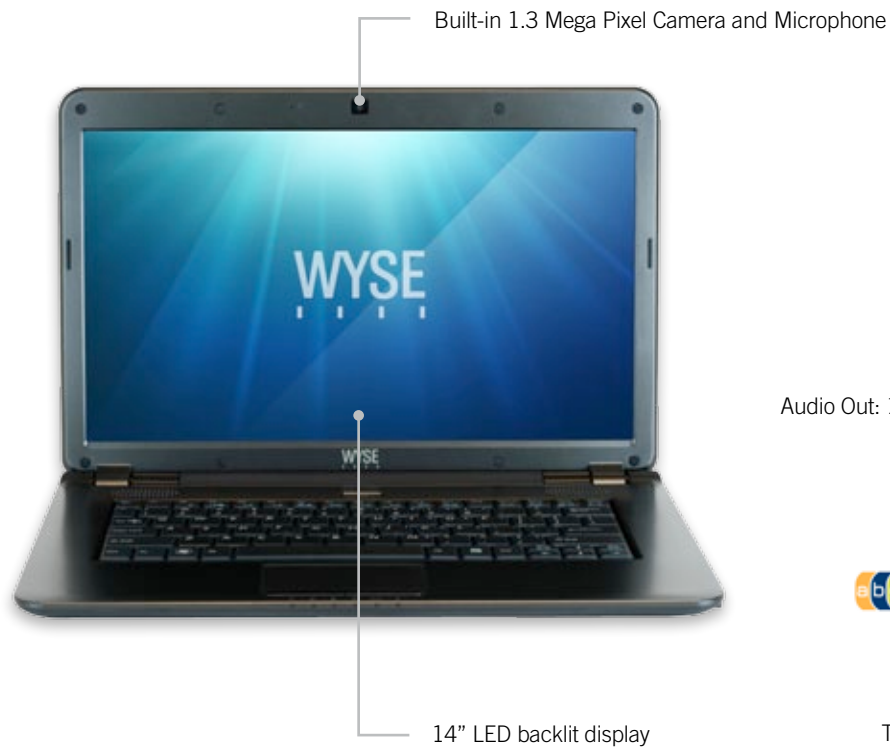

### Well connected

- Kensington lock slot
- Gigabit Ethernet port
- One USB 2.0 port
- Audio In: 1/8-inch mini jack, 8 bit stereo microphone
- Audio Out: 1/8-inch mini jack, 16 bit stereo

Built-in WiFi 802.11 ab/g/n



Media card reader  
Optional Smart Card reader



- ExpressCard slot
- Two SuperSpeed USB 3.0 ports
- DisplayPort video out
- VGA video out



Continue tour



Start

Models

Features

Technical

Contact

Print

# Desktop computing without compromise



EarthSmart Comput



Wyse X class c family



Wyse X class m family

## That's Wyse EarthSmart™ Computing

Through our EarthSmart Computing initiative we are committed to helping organizations implement a greener computing strategy - one that delivers a more efficient and productive computing experience for your users with a positive effect on energy wastage, heat and carbon emissions.

### Green Power

All Wyse X class mobile cloud clients pack a considerable punch with their green credentials. From reduced manufacturing impact and end-of-life recycling waste, to as little as 18 watts energy consumption, deploying Wyse X class mobile cloud clients to your mobile and remotely based workers will enable your organization to achieve a lighter carbon footprint.

### More Information

Download carbon calculators, fact sheets and white papers from here:  
[www.wyse.com/green](http://www.wyse.com/green)

Continue tour



Start

Models

Features

Technical

Contact

Print

# Thin Client Management Wyse Device Manager

Wyse Device Manager (WDM) addresses key management requirements for deploying powerful thin clients. With its centralized management and administration WDM helps IT departments deliver more effective remote thin client support while minimizing end user downtime.

**Security is assured with HTTPS based imaging, updates and downloads.**

## WDM delivers organization-wide benefits:

<b>Operations</b>	Centralized management. Collect and organize asset information.
<b>Administration</b>	Health status reports. Automated client settings. Update client firmware and add applications.
<b>End User IT Costs</b>	Easier more effective remote support. Create custom scripts and packages.
<b>Minimize downtime</b>	Restart or reset thin clients in less than a minute. Enforce policies. Minimize user errors.

## At a glance features.

<b>Security</b>	HTTPS Based Imaging / Updates Fully Encrypted Network Traffic Delegated Admin Access (MS AD) Support
<b>No-Hassle Deployment</b>	Complete Device Imaging / Patching / Updates Bandwidth Throttling for Efficiency / Reliability Software Updates and Add-ons
<b>Device Administration and Monitoring</b>	Device Health Status / Reporting Remote Shadowing / Control Default Device Configuration
<b>Reduce End User IT Costs</b>	Reduce energy consumption with scheduled up/down times
<b>Scalability</b>	Distributed Architecture Microsoft SQL Database Support Multiple Remote Repository Support
<b>Complete Asset Visibility</b>	Automated device discovery Detailed Hardware Asset information Installed Software Asset information

Wyse  
WDM™

Continue tour



Start

Models

Features

Technical

Contact

Print

# Cloud PC Provisioning Wyse WSM

## Enterprise computing from the cloud is here. Whatever you want. Wherever you need it.

That's the thinking behind Wyse WSM. It's a dynamic on-demand streamed computing environment where everyone gets their preferred operating systems, applications, user data and documents: Wherever they are and whenever they need them.

And Wyse WSM goes beyond the traditional VDI model too - with full support for mobile workers and remote branch offices. Wyse WSM effectively changes the rules on what's possible and opens up the benefits of high performance desktops to enterprise users: Wherever they are.

## Better than a PC could ever be.

With Wyse WSM users - such as those in the financial or retail industries - are given a fresh computer with their chosen PC operating system, applications and files all preloaded and ready-to-go, every time they sit down and start-up their powerful desktop devices known as Wyse 'cloud PCs'.

Wyse cloud PCs feature powerful processors that enable them to run full PC operating systems and applications locally, while keeping their documents and data secure on central Wyse WSM servers. Enabling existing PC users to continue to use all their familiar operating systems and applications seamlessly - but with greater reliability and better overall performance than a full PC - with the result that many users don't even realize they're using a cloud PC.

And - better still, Wyse WSM features a highly secure, robust and resilient network design that's ideal for remote offices and mission critical deployments such as the defence industry.

**With everything managed, updated, configured remotely and securely, Wyse WSM is everything a PC promises. Minus the headaches.**

# Wyse WSM™

Continue tour



Start

Models

Features

Technical

Contact

Print

# User Experience Optimization Wyse TCX™ Suite with Collaborative Processing Architecture™

## Wyse TCX delivers an amazing user experience in one software suite.

Wyse TCX Suite of virtualization software enriches the user experience by removing the limitations previously associated with thin clients. It enhances, not replaces, key protocols like ICA/HDX and RDP by adding key features to make each more valuable.



### Multi-display

Ensures application windows and dialog boxes are multi-monitor aware when using more than one monitor.



### USB Virtualization

Enables plug and play peripheral support for virtual desktop environments.


- Redirect and use local USB devices in virtual desktops.
- Deploy virtual desktops to knowledge workers with special device access needs.
- Enable a broad set of USB peripherals including webcams and headsets.



### Multimedia acceleration

Streamlines the delivery of video and audio content to the local client for a rich user experience within a thin client computing architecture.

- Accelerates Mpeg1, Mpeg2, WMV, Mpeg4 Part 2, AC3, AAC, MP3, WAV, WMA media types.
- Collaborative Processing Architecture enhances server scalability, and network utilization by off-loading multimedia rendering to the client.



### Flash acceleration

Flash acceleration helps thin client users to experience improved Flash video performance. While the Flash player continues to run server-side, the resulting images are transcoded and redirected to the client for fast rendering. The technology allows for greater control of frame rate and compression and supports enhanced playback of YouTube-style flash videos in Internet Explorer.



### Bi-directional sound

Enables bi-directional audio in virtual desktop environments, enabling solutions such as VOIP, digital dictation or voice recognition to be deployed.

[Continue tour](#)



Start

Models

Features

Technical

Contact

Print

# Virtualization Software Wyse Virtual Desktop Accelerator

## Removing the barriers of network latency

Wyse Virtual Desktop Accelerator (VDA) enables virtualized desktop and thin computing environments to be deployed to areas where network latency has, to date, presented operational barriers. Now, with Wyse VDA, more users can receive the full benefits of Wyse thin computing – with the best PC experience over virtualized desktops.

Wyse VDA is a software-only solution for Wyse thin clients and supported PCs that delivers the best user experience for the allocated network bandwidth by neutralizing the effects of network latency and packet loss. Making ‘thin’ suitable for more remote-site, branch, or field-based users.

Wyse VDA works with instead of replacing existing RDP and ICA protocols, accelerating them by up to 20 times on networks faced with latencies up to and beyond 300ms, and at least 768kbps bandwidth.

## At a glance features.

- Software-only acceleration of virtual desktops and applications
- Accelerates existing Citrix ICA and Microsoft RDP protocols
- Works on WANs and ‘fat, long pipes’
- Accelerates connections to Citrix XenApp, Citrix XenDesktop, VMware View and Microsoft Terminal Server and Microsoft Hyper-V VDI
- Enhances Wyse TCX software suite functionality across wide-area networks
- Enables Wyse Collaborative Processing Architecture across wide-area networks
- Administrator console provides control of maximum bandwidth per connection
- Leverages built-in security of underlying protocols (128-bit encryption for RDP and ICA).



Continue tour



Start

Models

Features

Technical

Contact

Print

# Operating Systems SUSE Linux Enterprise Thin Client

Wyse Enhanced SUSE Linux Enterprise Thin Client (SLETC) is a simple, secure, and easy to manage platform designed for customers looking for flexibility and support of the latest protocols (ICA, PCoIP, RDP, etc) without the need for a Windows-based thin client.

## Simple “Hands-Off” Management.

Deploying, managing, and updating SLETC is easier than any other Thin-Linux distribution, Period. Utilizing Wyse’s proven automatic update and configuration approach, management tasks can be handled centrally and easily without any management software required.

Updating 1 or 1,000 thin clients is as simple as dragging and dropping a file into a folder. For customers that desire a little more hands-on approach (such as asset tracking, reporting, etc) then integration with Wyse Device Manager is built-in.

## Security

Wyse Enhanced SLETC is designed with security in mind. IT Managers are able to provide a locked-down experience, smartcard login to virtual environments, VPN connectivity, and leverage a read-only file system that protects against data loss, theft and virus attacks.

## Thin-Linux for the Enterprise.

Wyse Enhanced SLETC is not a ‘home-brew’ Linux. In fact, it’s the industry’s only enterprise-quality Linux platform, created by combining the security and flexibility of Novell’s SUSE Linux with Wyse’s cloud client computing leadership and innovation in user experience and simplified management. Additionally, SLETC is the only Thin-Linux platform to protect customers from potential IP infringement suits as it is jointly indemnified by Novell and Microsoft.

**Novell**<sup>®</sup>

## Flexible, Multi-Protocol Support

Being built from a standard enterprise-quality Linux distribution means SLETC supports a wide range of protocols and infrastructures straight-out-of-the-box including Citrix, Microsoft, VMware and even your legacy applications (such as terminal emulations) - allowing you to mix-and-match connections from a single SLETC image.

## That’s Wyse Enhanced SUSE Linux Enterprise Thin Client

The only enterprise-quality Linux that’s optimized for thin client computing.

Continue tour



Start

Models

Features

Technical

Contact

Print

# Operating Systems Microsoft Windows Embedded Standard 2009

Running Windows Embedded Standard (WES) on Wyse thin clients gives IT departments the ability to deploy fully functional desktop clients with better manageability and significantly lower total cost of ownership than personal computers.

Wyse WES 2009-based thin clients can run 32 bit Microsoft Windows applications, either locally or from servers, with the inbuilt flexibility to add and support a host of desktop peripherals with permission from the IT administrator.

Full support is provided for RDP 7.0, Citrix ICA 11.2, VMware View 4.0.1 and Internet Explorer 8.

## Secure write-protected thin client desktops.

This robust and flexible operating system is further enhanced by the Wyse file-based Write Filter that enables you to protect the files, folder and/or entire volumes from accidental changes or user customization. On rebooting, the thin client simply returns to its original state thus preventing any possible damaging modification either from users or malware.

## Wyse customized image support

Wyse technicians are prepared to help you customize Windows Embedded Standard 2009 to your exact requirements in order to create custom-built images for subsequent enterprise-wide deployment, management and update through Wyse Device Manager.

**Contact your Wyse Partner for further details.**



Continue tour



Start

Models

Features

Technical

Contact

Print

# Operating Systems Microsoft Windows Embedded Standard 7

New Windows Embedded Standard 7 (WES 7) delivers a wealth of enhanced deployment, user experience and management benefits to Wyse desktops, mobiles and thin clients deployed across an organization's virtualized network.

## Richer user experience.

Wherever they are - deskbound or mobile - with Microsoft Windows Embedded Standard 7 your users can benefit from the rich user experience of the Aero interface and the power, familiarity and reliability of the Windows 7 operating system in a highly customizable and componentized form.

Full support is provided for Remote Desktop Protocol (RDP) 7.1 with RemoteFX technology to provide seamless connectivity to Windows Server 2008 R2 and virtual desktop infrastructure scenarios. The Wyse-enhanced WES7 platforms include additional features supporting the latest Citrix Online Plug-in and VMware View 4.6 to fit the needs of your most sophisticated users and making it an optimum OS for organizations wanting broad support for Cloud computing and desktop virtualization. Citrix Online Plug-in provides the HDX user experience and View 4.6 provides localization and Virtual Printing.

The platform also features additional Windows technology innovations to drive rich, immersive user experiences, including Internet Explorer 8.

There's full support and inbuilt flexibility too, to add and support a host of desktop peripherals with permission from the IT administrator.

## Easier to manage and deploy.

Now, with WES7, deploying 32-bit capable thin clients is easier and more manageable than ever before and reflects the direct working relationship between Wyse and Microsoft. The support for Domain Join and group policies through Active Directory, help with management and integration of thin clients into existing desktop management infrastructures.

Wyse Configuration Manager delivers unprecedented simplicity to the management of virtual desktops by allowing IT departments to auto-configure thin clients running Wyse-enhanced Windows Embedded Standard. By automating the deployment of WES thin clients throughout a private cloud WCM offers multiple benefits to organizations: reducing the need to do imaging, deploying custom images and faster configuration updates. Client devices are updated with the latest configuration settings for VDI connections (RDP, Citrix, VMware View), device settings and OS configuration automatically when devices startup.

Wyse Device Manager (WDM) addresses key management requirements. With its centralized management and administration, WDM helps IT departments deliver more effective remote thin client support while minimizing end user downtime. In addition, the Wyse USB Firmware Tool allows IT and Customer Service staff to quickly and easily image the devices directly.

## Enterprise-wide consistency.

Wyse Embedded Standard 7 and Wyse provide the ideal, cost effective opportunity to deploy a consistent, high performance operating system across Wyse cloud clients.



Continue tour



Start

Models

Features

Technical

Contact

Print

# Technical Wyse X class

The Wyse X class family features Wyse Enhanced SUSE Linux Enterprise, Windows Embedded Standard 2009, Windows Embedded Standard 7 operating systems and Wyse WSM provisioning software.

**Learn more.**  
**Simply click the icons below.**

Wyse X class  
Specifications c family



Wyse X class  
Specifications m family



Cloud PC Provisioning



Wyse Enhanced  
SUSE Linux



Microsoft Windows  
Embedded Standard 2009



Microsoft Windows  
Embedded Standard 7



Start

Models

Features

Technical

Contact

Print

# Hardware specifications

## Wyse X class c family: Wyse X50c, X90cw and X90c7 mobile thin clients and X00c mobile cloud PC

<b>Processors</b>	Intel Atom Z520 1.33GHz
<b>Memory</b>	X50C: Wyse Enhanced SUSE Linux: 1GB Flash / 1GB RAM X90CW: Windows Embedded Standard 2009: 2GB Flash / 1GB RAM and up to 4GB Flash / 2GB RAM X90C7: Windows Embedded Standard 7: 4GB Flash / 2GB RAM X00C for WSM: 160GB HDD / 2GB RAM
<b>I/O peripheral support</b>	One VGA port 15-pin D-sub for external monitor Three USB 2.0 ports Media slot 4-in-1 (MS/MS-Pro/SD/MMC) for additional storage One Mic In / One Line Out Built-in 1.3 M Pixel Camera and Microphone 3G capable
<b>Keyboard</b>	US, US international, UK, French, German
<b>Pointing Device</b>	Touchpad
<b>Networking</b>	10/100Base-T Fast Ethernet (RJ-45) Integrated wireless 802.11 b/g/n
<b>Factory options</b>	Bluetooth for connection to selected mobile phones*
<b>Display</b>	11.6" WXGA 1366 x 768 LED backlight
<b>Audio</b>	Output: 1/8-inch mini jack, full 16 bit stereo Input: 1/8-inch mini jack, 8 bit microphone
<b>Speakers</b>	Two internal stereo speakers

<b>Physical characteristics</b>	Width: 11.42 inches (290mm) Depth: 8.23 inches (209mm) Height: 1.39-1.25 inches (26.4~31.7mm)
<b>Weight</b>	3.2 lbs. (1.45kg) with battery
<b>Device Security</b>	Built-in Kensington security slot (cable sold separately)
<b>Keyboard and mouse</b>	Keyboard / Touchpad
<b>Keyboard layouts supplied</b>	French, German, Italian, Norwegian, Spanish, Swedish, UK, US, US international
<b>Battery</b>	6-cell Li-Ion battery (5200mAh) Up to 8 hours autonomy
<b>Power</b>	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V5.0 compliant power supply Average power usage with under 15 Watts 19V/65W AC Adapter
<b>Temperature Range</b>	50° to 104° F (10° to 40° C)
<b>Humidity</b>	20% to 80% condensing 10% to 95% non-condensing
<b>Safety Certifications</b>	UL/IEC 60950-1, TUV EMC: CE (EN 55022, EN 55024), FCC 15B) FCC ( Part 15C), CE (EN 300 328, EN 301 489), Richtlinie 1999/5/EC RoHS, WEEE
<b>Warranty</b>	One-year limited warranty, 6 months battery warranty Visit our web site for WyseChoice extensions and upgrades

\* Camera and bluetooth option are currently not supported on X50c.



Start

Models

Features

Technical

Contact

Print

# Hardware specifications

## X class m family: Wyse X90mw and X90m7 mobile thin clients

<b>Processor</b>	Dual core AMD G-T56N 1.6 GHz Processor with AMD Radeon™ HD 6310 Graphics
<b>Memory</b>	X90mw: Windows Embedded Standard 2009: 2GB Flash / 2GB RAM X90m7: Windows Embedded Standard 7: 4GB Flash / 2GB RAM
<b>I/O peripheral support</b>	One VGA port One DisplayPort One USB 2.0 port and two USB 3.0 ports Media card reader slot for additional storage One Mic In / One Line Out Built-in 1.3 M Pixel Camera and Microphone Express Card slot 3G/4G Capable (PCIe slot available) Smart Card Reader (Factory installed Configuration Option)
<b>Networking</b>	10/100/1000 Mbps Gigabit Ethernet Integrated wireless 802.11 a/b/g/n Dual Band (2.4 Ghz and 5Ghz)
<b>Display</b>	14" WXGA 1366 x 768 LED backlight
<b>Audio</b>	Output: 1/8-inch mini jack, full 16 bit stereo, Digital audio out Input: 1/8-inch mini jack, 8 bit microphone
<b>Speakers</b>	Two internal stereo speakers

<b>Physical characteristics</b>	Width: 9.32 inches (239.2mm) Depth: 13.5 inches (341.6mm) Height: 1.14 inches (28.9-35.5mm)
<b>Weight</b>	4.0lbs (1.83kg)
<b>Device Security</b>	Built-in Kensington security slot (cable sold separately)
<b>Keyboard and mouse</b>	Keyboard / Touchpad
<b>Keyboard layouts supplied</b>	US, US international, UK, French, German
<b>Battery</b>	6-cell Li-Ion battery (5200mAh)
<b>Power</b>	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V5.0 compliant power supply 19V/65W AC Adapter
<b>Temperature Range</b>	50° to 104° F (10° to 40° C)
<b>Humidity</b>	20% to 80% condensing 10% to 95% non-condensing
<b>Safety Certifications</b>	UL/IEC 60950-1, TUV EMC: CE (EN 55022, EN 55024), FCC 15B) FCC ( Part 15C), CE (EN 300 328, EN 301 489), Richtlinie 1999/5/EC RoHS, WEEE
<b>Warranty</b>	One-year limited warranty, 6 months battery warranty Visit our web site for WyseChoice extensions and upgrades



# Software specifications

## Wyse WSM

<b>Device Hardware Requirements</b>	<p>Windows XP Pro</p> <ul style="list-style-type: none"> <li>- Minimum processor speed 800 MHz (1GHz or higher is recommended)</li> <li>- Mind. 256 MB (1GB or higher is recommended)</li> </ul> <p>Vista and Windows 7</p> <ul style="list-style-type: none"> <li>- Minimum processor speed 1 GHz (1.5GHz or higher is recommended)</li> <li>- Mind. 1 GB (2GB or higher is recommended)</li> <li>- Flash size/local storage – none needed. If the device has flash it can be used as a local cache for offline mode.</li> </ul>
<b>Server Requirements</b>	<p>Minimum processor speed 1GHz (3GHz or higher is recommended).</p> <p>Server Operating System: Windows XP Pro SP3, Windows Server 2003, Windows Server 2008 and 2008 R2</p>
<b>Network Requirements</b>	<p>Server Lan Speed = Minimum 100Mbps (1Gbps and up is recommended)</p> <p>Device Lan Speed = Minimum 10Mbps (100 Mbps full duplex is recommended)</p>
<b>Operating Systems Supported</b>	<p>Microsoft Windows XP</p> <p>Microsoft Windows Vista</p> <p>Microsoft Windows 7</p>
<b>Databases supported</b>	<p>Microsoft SQL 2005 and 2008 (Server and Express Editions)</p>
<b>Built-in high Availability</b>	<ul style="list-style-type: none"> <li>- Database availability using SQL clustering.</li> <li>- Built-in server high availability through WSM Server Grouping feature.</li> <li>- Server to Server Fail-over Capability.</li> </ul>
<b>Fast and Easy Installation</b>	<ul style="list-style-type: none"> <li>- Installing Wyse WSM is simply a matter of running a single, graphical installer.</li> <li>- The installer checks for all the prerequisite components before installation.</li> </ul>

<b>Web-based Admin Console</b>	<ul style="list-style-type: none"> <li>- Allows IT administrators to access Wyse WSM from any browser.</li> <li>- Control the entire installation from a central location.</li> <li>- Dramatically simplifies administration, saving IT time and user downtime.</li> <li>- Wizards to guide the user through specific tasks.</li> </ul>
<b>Operation System and Application Imaging Tools</b>	<ul style="list-style-type: none"> <li>- Imaging tool simplifies the process of creating an OS image for the specific hardware configuration and an application image for all hardware configurations.</li> <li>- All OS and application images are ready for deployment once created, no further modifications needed.</li> </ul>
<b>Application Subscription Management</b>	<p>Use flexible application deployment methods:</p> <ul style="list-style-type: none"> <li>- Auto-subscribed applications are ready for use when user logs in for the first time.</li> <li>- Manual subscriptions allow users the flexibility to use applications only when needed.</li> <li>- Mandatory subscriptions that cannot be unsubscribed by users.</li> </ul>
<b>Protected System Drive</b>	<ul style="list-style-type: none"> <li>- Allows administrators to protect the system drive from end user initiated updates.</li> <li>- Prevents changes to operating system drive except by administrators, helping stop viruses, spyware, or malware from infecting the device.</li> </ul>



Start

Models

Features

Technical

Contact

Print

# Software specifications continued

## Wyse WSM continued

<b>Operating System Streaming</b>	<ul style="list-style-type: none"><li>- Wyse WSM provides an on-demand operating system to Wyse cloud PCs or diskless PCs on the network.</li><li>- Innovative technology makes each Wyse cloud PC or diskless PC think there is a virtual hard disk attached to the device.</li><li>- Only those bits needed for the normal device operation are sent in order to reduce network traffic.</li><li>- Operating-system images can be shared across multiple devices, making management easier.</li></ul>
<b>Flexible Boot Options</b>	<ul style="list-style-type: none"><li>- Each device can boot from four operating system image assignments.</li><li>- Administrators can assign or let users choose which operating system they want to boot.</li><li>- First disk mode for the default OS image to boot from every time device starts up.</li><li>- First available mode to boot from the first responding server in order to balance loads.</li></ul>
<b>Application License Management and Metering</b>	<ul style="list-style-type: none"><li>- Wyse WSM provides the infrastructure to collect information about the application license-usage across the enterprise. This information allows IT organizations to save money associated with application licenses.</li><li>- Licenses can be stored for all the applications deployed. It also enforces license compliance.</li><li>- Types of licenses that can be controlled include:<ul style="list-style-type: none"><li>1) Time-based licenses (valid for X days).</li><li>2) Number of concurrent users.</li></ul></li></ul>

<b>Modes of Operation</b>	<p>Wyse WSM allows administrators to choose modes of operation for the OS:</p> <ul style="list-style-type: none"><li>- Private Mode – for administration of operating system images.</li><li>- Shared Mode – has two additional modes of normal operation:<ul style="list-style-type: none"><li>1) Volatile – returns desktop to pristine state after a device reboot.</li><li>2) Persistent – remembers any user settings after a device reboot.</li></ul></li></ul>
<b>Remote Servers for Scalability</b>	<ul style="list-style-type: none"><li>- IT administrators can deploy multiple remote servers to improve scalability of the overall solution.</li><li>- Central management of remote servers allows easy deployment of the solution across different geographic locations.</li></ul>
<b>Comprehensive Reporting</b>	<ul style="list-style-type: none"><li>- Easy ad-hoc reporting based on flexible parameters.</li><li>- Reports are delivered through HTML, giving you the flexibility to output in any form.</li><li>- License-metering reports can be used to make proactive purchasing decisions.</li><li>- License-audit reports can be used for compliance purposes.</li></ul>
<b>Desktop Compatibility</b>	<p>Wyse WSM works with Wyse COOLE, VOOLE, ROOL/E, ZOOD and X00C family cloud PCs as well as with existing thin clients, diskless PCs and virtual-desktop systems.</p>



Start

Models

Features

Technical

Contact

Print

# Software specifications

## SUSE Linux Enterprise Thin Client

<b>Firmware features</b>	SUSE Linux Enterprise Thin Client 11 SP1 Automatic Central Configuration (text-based INI's) Automatic Upgrades (FTP, HTTP, HTTPS) Secure, read-only file system with lockdown abilities Wyse RDP client (RDP7 Compatible) Citrix Online Plugin 11.2 client (ICA 11.2) w/ HDX Mediatream, Plug-n-Play, Realtime, etc. VMware View Open Client compatible with View 4.5 Ericom PowerTerm® Terminal Emulation Cisco, Juniper, Nortel, IPSEC VPN Support (Add-ons) Local/Remote Printing support (CUPS, LPR/LPD, Samba, ThinPrint,etc) Web-based applications (Firefox, Flash, JAVA,etc) XDMCP SSH
<b>Server OS Infrastructure Support</b>	Citrix XenApp / Citrix Presentation Server Citrix XenDesktop VMware View Microsoft Windows Terminal Server 2003 & 2008
<b>Keyboard language support</b>	100+ Keyboard Layouts supported locally (English, German, Spanish, French, Italian, Dutch, Chinese, Japanese, Turkish)
<b>Management</b>	Automatic, "hands-off" configuration and upgrading of thin clients without the need for device management software. Optionally, administrators can choose to integrate with Wyse Device Manager (WDM) for more hands-on control: <ul style="list-style-type: none"><li>- Complete image upgrade</li><li>- Wake terminal remotely (Wake-on LAN)</li><li>- Remote screen shadowing of entire desktop (VNC)</li><li>- Asset management and reporting</li></ul>

<b>Wireless support</b>	WPA Personal, WPA2 Personal, WPA Enterprise WPA Enterprise Authentication support PEAP/TLS: PAP/MSCHAP/MSCHAPV2 support
<b>Wyse TCX Suite</b>	Advanced support for innovative Wyse TCX Suite virtualization software that both works with and enhances ICA and RDP (instead of replacing them) featuring: <ul style="list-style-type: none"><li>- Multimedia acceleration - the power to run rich multimedia files formats utilizing Wyse Collaborative Processing Architecture (CPA) that intelligently redirects the necessary processing tasks between the thin client and the server.</li><li>- Multi-display - ensures that windows and dialogue boxes behave the way users expect when using more than one monitor.</li><li>- USB Virtualization - makes thin client-attached USB devices visible to virtual desktops and applications, with full IT control.</li><li>- Bi-directional sound - enables virtual desktops and applications to receive and transmit high quality audio without compromise.</li><li>- Flash acceleration - helps users of thin clients to experience improved Flash performance.</li></ul>
<b>Wyse Virtual Desktop Accelerator</b>	Wyse Virtual Desktop Accelerator Delivers the best user experience for the allocated network bandwidth. Wyse Virtual Desktop Accelerator neutralizes the effects of network latency and packet loss, making cloud client computing more suitable for more remote-site, branch, or field-based users - and boosts RDP and ICA up to 20 times on networks with latencies up to and exceeding 300ms and at least 768kbps bandwidth.



Start

Models

Features

Technical

Contact

Print

# Software specifications

## Microsoft Windows Embedded Standard 2009

<b>Firmware features</b>	Microsoft Windows Embedded Standard 2009 Microsoft Internet Explorer 8.0 resident: HTML, JavaScript, XML, Active X Sun JRE, Media Player, Citrix Web Interface RDP 7.0 resident Citrix Online Plugin 11.2 resident (ICA 11.2) VMware View 4.0.1 client resident Ericom PowerTerm® Terminal Emulation provides 30-plus terminal emulations Windows Media Player 11, .NET 3.5
<b>Server OS Infrastructure Support</b>	Citrix XenApp / Citrix Presentation Server Citrix XenDesktop VMware View Microsoft Windows Terminal Server 2003 & 2008
<b>Application Framework</b>	.Net 3.5
<b>Security</b>	File Based Write Filter (FBWF) Microsoft Baseline Security Analyzer (MBSA)
<b>Set-up and Configuration</b>	Boot from local flash Microsoft Windows WES7 user interface languages: U.S, Optional add-ons
<b>Keyboard language support</b>	U.S. English (standard), French, German, Spanish, U.K. English, 40 other languages included
<b>Protocol Support</b>	TCP/IP, DNS, DHCP, PXE
<b>Management</b>	Remote management, configuration, and upgrades through Wyse Device Manager Complete image upgrade Wake terminal remotely (Wake-on LAN) Terminal configuration (IP information, name, etc.) Remote screen shadowing of entire desktop (Wyse Remote Shadow) Reporting, Asset management SMS Altiris

<b>Wireless support</b>	802.11 a/b/g/n support with external wireless adapter or internal wireless adapter option* WPA-2, WEP, WPA wireless authentication PEAP-GTC wireless authentication protocol with optional Juniper Odyssey Client Supports PC-Card wireless adapters from: Cisco, D-Link, Netgear, US Robotics, Trendware*
<b>Plug-ins</b>	Adobe Flash Player Adobe Shockwave Microsoft Silverlight
<b>Wyse TCX Suite</b>	Advanced support for innovative Wyse TCX Suite of virtualization software that both works with and enhances ICA and RDP (instead of replacing them) featuring: <ul style="list-style-type: none"> <li>- Multimedia acceleration - the power to run rich multimedia files formats utilizing Wyse Collaborative Processing Architecture (CPA) that intelligently redirects the necessary processing tasks between the thin client and the server.</li> <li>- Multi-display - ensures that windows and dialogue boxes behave the way users expect when using more than one monitor.</li> <li>- USB Virtualization - makes thin client-attached USB devices visible to virtual desktops and applications, with full IT control.</li> <li>- Bi-directional sound - enables virtual desktops and applications to receive and transmit high quality audio without compromise.</li> <li>- Flash acceleration - helps users of thin clients to experience improved Flash performance.</li> </ul>
<b>Wyse Virtual Desktop Accelerator</b>	Neutralizes the effects of network latency and packet loss, making 'thin' more suitable for more remote-site, branch, or field-based users by boosting RDP and ICA up to 20 times on networks with latencies up to and exceeding 300ms and at least 768kbps bandwidth.

\*requires hardware support



Start

Models

Features

Technical

Contact

Print

# Software specifications

## Microsoft Windows Embedded Standard 7

<b>Firmware features</b>	Microsoft Windows Embedded Standard 7 (WES7) Microsoft Internet Explorer 8.0 resident: HTML, JavaScript, XML, Citrix Web Interface Microsoft RDP 6.1 client (Protocol 7.1 Supported) with RemoteFX technology Citrix Online Plugin 12 resident (ICA 12) with HDX Citrix XenDesktop VMware View 4.6 client resident Ericom PowerTerm® Terminal Emulation provides 30-plus terminal emulations Windows Media Player 12
<b>Server OS Infrastructure Support</b>	Citrix XenApp / Citrix Presentation Server Citrix XenDesktop VMware View Microsoft Windows Terminal Server 2003 & 2008 R2
<b>Security</b>	File Based Write Filter (FBWF)
<b>Set-up and Configuration</b>	Boot from local flash Microsoft Windows WES7 user interface languages: U.S, Optional add-ons
<b>Keyboard language support</b>	U.S. English (standard), French, German, Spanish, U.K. English, 40 other languages included
<b>Protocol Support</b>	TCP/IP, DNS, DHCP, PXE
<b>Management</b>	Auto-configuration with Wyse Configuration Manager Remote management, configuration, and upgrades through Wyse Device Manager Complete image upgrade Terminal configuration (IP information, name, etc.) Reporting, Asset management Simple USB imaging solution with Wyse USB Firmware Tool

<b>Wireless support</b>	802.11 a/b/g/n* support with external wireless adapter or internal wireless adapter option WPA-2, WEP, WPA wireless authentication PEAP-GTC wireless authentication protocol with optional Juniper Odyssey Client Supports PC-Card wireless adapters* from: Cisco, D-Link, Netgear, US Robotics, Trendware
<b>Plug-ins</b>	Adobe Flash Player Microsoft Silverlight
<b>Wyse TCX Suite</b>	Advanced support for innovative Wyse TCX Suite virtualization software that both works with and enhances ICA and RDP (instead of replacing them) featuring: <ul style="list-style-type: none"><li>- Multimedia acceleration - the power to run rich multimedia files formats utilizing Wyse Collaborative Processing Architecture (CPA) that intelligently redirects the necessary processing tasks between the thin client and the server.</li><li>- Multi-display - ensures that windows and dialogue boxes behave the way users expect when using more than one monitor.</li><li>- USB Virtualization - makes thin client-attached USB devices visible to virtual desktops and applications, with full IT control.</li><li>- Bi-directional sound - enables virtual desktops and applications to receive and transmit high quality audio without compromise.</li><li>- Flash acceleration - helps users of thin clients to experience improved Flash performance.</li></ul>
<b>Wyse Virtual Desktop Accelerator</b>	Neutralizes the effects of network latency and packet loss, making 'thin' more suitable for more remote-site, branch, or field-based users by boosting RDP and ICA up to 20 times on networks with latencies up to and exceeding 300ms and at least 768kbps bandwidth.

\*requires hardware support



Start

Models

Features

Technical

Contact

Print

# Contact Wyse

## Wyse Technology Inc.

3471 North First Street,  
San Jose,  
CA 95134-1801

## Visit our website at:

<http://www.wyse.com>  
or send an email to: [sales@wyse.com](mailto:sales@wyse.com)

## Wyse Sales

800 GET WYSE (800 438 9973)

## International customers please dial:

00 1 408 473 1200

## Wyse Support Portal

Wyse Support Portal provides a fast and accurate way to communicate interactively with Wyse Customer Support, and helps us respond to your requests more quickly.

<http://support.wyse.com/selfservice.html>

Wyse offers cloud client computing sales, service and support expertise around the globe. Click for contact details.



©2011 The Wyse logo and Wyse are trademarks of Wyse Technology Inc. Other product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies. All specifications are subject to change without notice. Whilst we make every effort to ensure the accuracy of the details, specifications, models, images and benefits featured in this datasheet, we cannot be held responsible for any errors and/or omissions. If you have any queries regarding Wyse products please contact your authorized regional Wyse Partner or representative for further information and assistance. Some features require support by server operating system and protocol. Approved final 090511.

**WYSE**  
| | | |  
**wyse.com**  
THE GLOBAL LEADER IN  
CLOUD CLIENT COMPUTING



Start

Models

Features

Technical

Contact

Print

# Wyse® X class™

Thin. Compact. Secure.

# WYSE

THE GLOBAL LEADER IN  
CLOUD CLIENT COMPUTING

## Wyse X class C family mobile cloud clients

### Secure mobile computing. Without compromise.

With the compact Wyse X class C family mobile cloud clients, you can take the benefits of Wyse Cloud Client computing with you wherever you go. Deploying secure, accessible and manageable laptops has never been easier – as dependant on the model – user data is either stored on central servers or locally on a HDD for offline working.

Powered by Intel Atom Z520 1.33 GHz processors these compact, high performance mobile cloud clients allow more users than ever before to gain secure access to corporate networks when and wherever they need to.

They're optimized for Citrix XenApp, Citrix XenDesktop, Microsoft Terminal Server and VMware View environments - and are available across a range of operating systems: Wyse Enhanced SUSE Linux Enterprise, Microsoft Windows XP Embedded, Windows Embedded Standard 2009 & 7 and Wyse WSM.

### Compact high performance mobile cloud clients.

Wyse X class C family mobile cloud clients are packed with features that would put some fat-laptops to shame. Busy mobile workers and traditional 'road-warriors' alike will appreciate their compact slim profile, light weight, crisp LED-backlit display and long-lasting 8 hour battery.

\* Camera and bluetooth option are currently not supported on X50c.



## At a glance

### Performance

New generation Intel Atom Z520 1.33GHz processor delivering high performance with low power requirements (15 watts).

### Ultra-mobile

Slim, compact design weighing just 3.2lb that's ideal for busy mobile workers and classic 'road-warriors' alike.

### Rich user connectivity

Built-in webcam\*, integrated wireless b/g/n, Bluetooth 2.1\* and support for 3G cards provide everything needed for rich user interactivity, flexible connectivity and secure mobile access.

### Green

Draws under 15 watts of power. Small form-factor reduces the impact of manufacturing and end-of-life disposal on the environment.

### Virtualization

Users benefit from built-in support for the Wyse TCX Suite of user experience optimizations created to deliver the best user experience over virtualized desktop environments.

### Management

Features Wyse Device Manager (workgroup edition).

### Wyse Enhanced SUSE Linux

Secure, flexible and market-leading Linux combined with Wyse innovations in management and user experience.

### OS and Application Provisioning

Full integration with Wyse WSM Cloud PC provisioning software with the X00c.

### Microsoft Windows Embedded Standard 2009 and 7

Take advantage of the power of Windows Embedded Standard 2009 and the rich user experience of Windows Embedded Standard 7.

# Specification

## Wyse X50c, X90cw and X90c7 mobile thin clients and X00c mobile cloud PC

<b>Processors</b>	Intel Atom Z520 1.33GHz
<b>Memory</b>	X50c: Wyse Enhanced SUSE Linux: 1GB Flash / 1GB RAM X90cw: Windows Embedded Standard 2009: 2GB Flash / 1GB RAM and up to 4GB Flash / 2GB RAM X90c7: Windows Embedded Standard 7: 4GB Flash / 2GB RAM X00c for WSM: 160GB HDD / 2GB RAM
<b>I/O peripheral support</b>	One VGA port 15-pin D-sub for external monitor Three USB 2.0 ports Media slot 4-in-1 (MS/MS-Pro/SD/MMC) for additional storage One Mic In One Line Out Built-in 1.3 M Pixel Camera and Microphone* 3G capable
<b>Keyboard</b>	US, US international, UK, French, German
<b>Pointing Device</b>	Touchpad
<b>Networking</b>	10/100Base-T Fast Ethernet (RJ-45) Integrated wireless 802.11 b/g/n
<b>Factory options</b>	Bluetooth for connection to selected mobile phones*
<b>Display</b>	11.6" WXGA 1366 x 768 LED backlight
<b>Audio</b>	Output: 1/8-inch mini jack, full 16 bit stereo Input: 1/8-inch mini jack, 8 bit microphone
<b>Speakers</b>	2 internal stereo speakers
<b>Physical characteristics</b>	Width: 11.42 inches (290mm) Depth: 8.23 inches (209mm) Height: 1.39-1.25 inches (26.4-31.7mm)
<b>Weight</b>	3.2 lbs. (1.45kg) with battery
<b>Device Security</b>	Built-in Kensington security slot (cable sold separately)
<b>Battery</b>	6-cell Li-Ion battery (5200mAh) Up to 8 hours autonomy
<b>Power</b>	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V5.0 compliant power supply Average power usage with under 15 Watts 19V/65W AC Adapter
<b>Temperature Range</b>	50° to 104° F (10° to 40° C)
<b>Humidity</b>	20% to 80% condensing 10% to 95% non-condensing
<b>Safety Certifications</b>	Safety: UL/IEC 60950-1, TUV EMC: CE (EN 55022, EN 55024), FCC 15B) Wireless: FCC ( Part 15C), CE (EN 300 328, EN 301 489) Directive 1999/5/EC Environment: RoHS, WEEE
<b>Warranty</b>	One-year limited warranty, 6 months battery warranty Visit our web site for WyseChoice extensions and upgrades

\* Camera and bluetooth option are currently not supported on X50c.

Wyse Technology Inc.  
3471 North First Street  
San Jose, CA 95134-1801

Visit our website at:  
<http://www.wyse.com>  
Or send email to: [sales@wyse.com](mailto:sales@wyse.com)

Wyse Sales  
800 GET WYSE  
(800 438 9973)

Wyse Support Portal:  
A fast and accurate way to communicate  
interactively with Wyse Customer Support.  
<http://support.wyse.com/selfservice.html>

©2011 The Wyse logo and Wyse are trademarks of Wyse Technology Inc. Other product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies. Specifications subject to change without notice. Some features require support by server operating system and protocol. Approved final 090511.

**WYSE**  
| | | | |  
THE GLOBAL LEADER IN  
CLOUD CLIENT COMPUTING  
**wyse.com**

# Wyse® X class™

High performance mobile thin client.

# WYSE

THE GLOBAL LEADER IN  
CLOUD CLIENT COMPUTING

## Wyse X class m family mobile thin clients

### Anywhere Access to Virtual Desktops.

The Wyse X class m family is the next-generation 14" mobile thin client, bringing high performance, HD multimedia capabilities, and leading security to the mobile worker.

The Wyse X class m family delivers a combination of performance, connectivity, and ease of use never before seen in a thin client. The device is available with a dual core AMD G-T56N 1.6 GHz processor with AMD Radeon™ HD 6310 graphics.

The Wyse X class m family also includes SuperSpeed USB 3.0 connectivity, enabling the newest peripherals and speeds up to 10 times faster than USB 2.0. The Wyse X class m family offers enterprises an advanced, highly reliable, and secure device that seamlessly connects to existing IT infrastructures and delivers access to the most advanced Web browser and media player capabilities in a virtual client. These devices are optimized and certified for Citrix XenApp, Citrix XenDesktop, Microsoft Terminal Server and Hyper-V, and VMware View environments.

### Ease of use: It's the thin client that does it all, without making you do it all.

The Wyse X class m family is based on Wyse-enhanced Windows Embedded, providing broad functionality for a dynamic world.

The familiar user interface, integrated Windows Media Player, Internet Explorer, and full support for embedded Windows applications make the X class m family a powerhouse of capability whether you need a mobile thin client for virtual desktop or cloud applications, a more-secure, solid state laptop for custom applications, or a secure work from home station for telecommuters.



## At a glance

### Performance

Featuring a dual core 1.6 GHz Processor with AMD Radeon™ HD 6310 Graphics specifically designed for excellent mobile computing and graphics.

### Rich user connectivity

Provides everything needed for rich user interactivity, flexible connectivity and secure mobile access with built-in webcam, dual band wireless a/b/g/n, optional smart card support, support for 3G/4G cards as well as SuperSpeed USB 3.0.

### Virtualization

Wyse X class mobile thin clients can be enhanced by the Wyse TCX Suite of user experience optimizations.

### Management

Features Wyse Device Manager (workgroup edition).

### Microsoft Windows Embedded Standard 2009 and 7

Take advantage of the power of Windows Embedded Standard 2009 and the rich user experience of Windows Embedded Standard 7.



# Specification

## Wyse X90m7 mobile thin client

<b>Processor</b>	Dual core AMD G-T56N 1.6 GHz Processor with AMD Radeon™ HD 6310 Graphics
<b>Memory</b>	X90mw: Windows Embedded Standard 2009: 2GB Flash / 2GB RAM X90m7: Windows Embedded Standard 7: 4GB Flash / 2GB RAM
<b>I/O peripheral support</b>	One VGA port One DisplayPort One USB 2.0 port and two USB 3.0 ports Media card reader slot for additional storage One Mic In / One Line Out Built-in 1.3 M Pixel Camera and Microphone Express Card slot 3G/4G Capable (PCIe slot available) Smart Card Reader (Factory installed Configuration Option)
<b>Networking</b>	10/100/1000 Mbps Gigabit Ethernet Integrated wireless 802.11 a/b/g/n Dual Band (2.4 Ghz and 5Ghz)
<b>Display</b>	14" WXGA 1366 x 768 LED backlight
<b>Audio</b>	Output: 1/8-inch mini jack, full 16 bit stereo, Digital audio out Input: 1/8-inch mini jack, 8 bit microphone
<b>Speakers</b>	Two internal stereo speakers
<b>Physical characteristics</b>	Width: 9.42 inches (239.2mm) Depth: 13.5 inches (341.6mm) Height: 1.14 inches (28.9-35.5mm)
<b>Weight</b>	4.0lbs. (1.831kg)
<b>Device Security</b>	Built-in Kensington security slot (cable sold separately)
<b>Keyboard and mouse</b>	Keyboard / Touchpad
<b>Keyboard layouts supplied</b>	US, US international, UK, French, German
<b>Battery</b>	6-cell Li-Ion battery (5200mAh)
<b>Power</b>	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V5.0 compliant power supply 19V/65W AC Adapter
<b>Temperature Range</b>	50° to 104° F (10° to 40° C)
<b>Humidity</b>	20% to 80% condensing 10% to 95% non-condensing
<b>Safety Certifications</b>	Safety: UL/IEC 60950-1, TUV EMC: CE (EN 55022, EN 55024), FCC 15B) Wireless: FCC ( Part 15C), CE (EN 300 328, EN 301 489) Directive 1999/5/EC Environment: RoHS, WEEE
<b>Warranty</b>	One-year limited warranty, 6 months battery warranty Visit our web site for WyseChoice extensions and upgrades



Wyse Technology Inc.  
3471 North First Street  
San Jose, CA 95134-1801

Visit our website at:  
<http://www.wyse.com>  
Or send email to: [sales@wyse.com](mailto:sales@wyse.com)

Wyse Sales  
800 GET WYSE  
(800 438 9973)

Wyse Support Portal:  
A fast and accurate way to communicate  
interactively with Wyse Customer Support.  
<http://support.wyse.com/selfservice.html>

©2011 The Wyse logo and Wyse are trademarks of Wyse Technology Inc. Other product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies. Specifications subject to change without notice. Some features require support by server operating system and protocol. Approved final 090511.

**WYSE**  
| | | |  
THE GLOBAL LEADER IN  
CLOUD CLIENT COMPUTING  
**wyse.com**