


Planar LookThru L0552

Transparent OLED Display

The Planar® LookThru® OLED Display (LO552) is a 55-inch transparent display that showcases dynamic information on a transparent surface glass without the need for a back light or enclosure. The electronics box on the Planar LookThru LO552 is set at a 90-degree angle to the display glass. The display can be used in both portrait and landscape modes, can be table-mounted, ceiling-mounted or tiled to create large, eye-catching video wall arrays. The Planar LookThru LO552 features Planar® ERO-OLED™ (Extended Ruggedness and Optics™) technology featuring Corning® Gorilla® Glass for enhanced durability and optics.

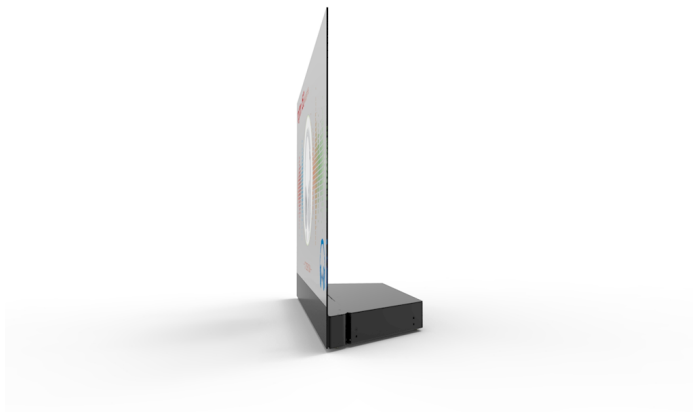

SPECIFICATION	DETAIL
Product Name	LO552
Planar Part Number	998-1483-00
Viewable Size	55" diagonal
Display Active Area	47.6" (W) x 26.8" (H) (1209.6 mm x 680.4mm)
Display Inactive Area (Left/Right/Top/Bottom)	0.2" / 0.2" / 0.2" / 4.0" (5.9 mm / 5.9 mm / 5.9 mm / 100.0 mm)
Aspect Ratio	16:9
Display Resolution	1920 x 1080, full HD
Display Type	Active Matrix Organic Light-Emitting Diode (AMOLED)
Surface Treatment	ERO (Extended Ruggedness and Optics) using Corning® Gorilla Glass®
Full Screen White Brightness	150 cd/m ² (typ.)
Peak White Brightness	400 cd/m ² (typ.)
Brightness, Uniformity	20%
Transmissivity	45%
Orientation	Landscape, Portrait, Inverted (Ceiling Mount), Tabletop, Tiled
Viewing Angle (typ)	178° H,V
Contrast Ratio (typ)	>100k:1
Response Time (typ)	<1 ms
Palette	1.073 billion colors (10-bit)
Color Gamut	120% of NTSC

Pixels per inch (PPI)	40
Pixel Pitch	0.63 mm
Frame Rate	120Hz
Video Inputs	HDMI x4, DisplayPort x1
External Connections	LAN RJ45, RS232, IR, Keypad, AC Power In
Dimensions (W x H x D)	48.1" x 31.4" x 11.7" (1221.4 mm x 798.5 mm x 298.0 mm)
Weight	73.5 lbs (33.4 kg)
Power Requirements	100 to 240VAC
Power Consumption (typ)	140W (<1W standby)
Power Consumption (max)	TBDW
Product Approvals	NRTL Listed, FCC-Class A, CE Class A, WEEE, RCM, PSE, EN60950 and CISPER22/2010, RoHS
VESA Compatible/Location	No
Control and Monitoring	IR, RS-232, LAN, Keypad
Operating Temperature	0° to 40°C
Storage and Transport Temperature	-20° to 65°C
Storage Temperature/Humidity (degrees F/C, relative humidity)	95%
Lifetime: Typical	TBDk hours (dynamic image at 25°C)
Options / Features	Fanless, TAA-Compliant, optional tray. Tiling/Video Wall configurations possible through optional external processor. Standard mount.
Warranty	1 year
UPC	8 10689 00708 1

For more information, please visit www.planar.com

Specifications are subject to change without notice.

Specification Report Date: 5/15/2019

© Copyright 2019 Planar Systems, Inc. All rights reserved