

Technical Specifications

HP Z32 4K UHD Display




Front

1. Power light

Power LED:
Active = White
Standby = Amber

Technical Specifications

HP Z32 4K UHD Display

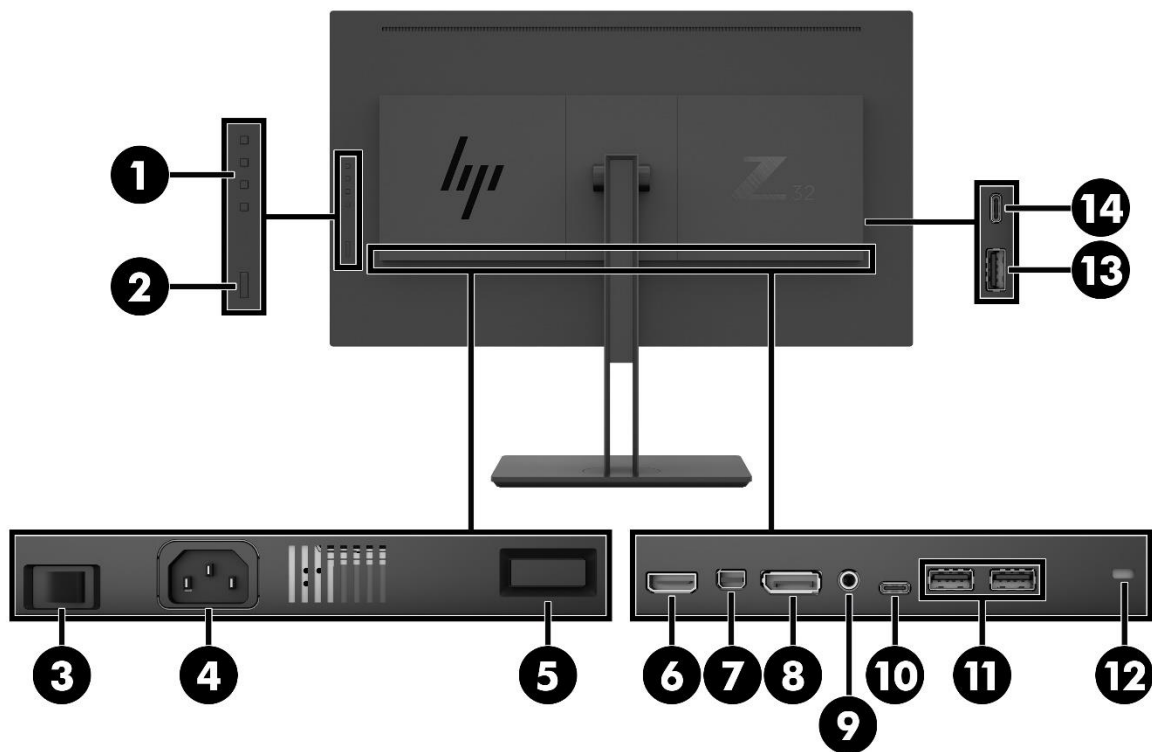

1. **Function buttons**
2. **Power button**
3. **Master power switch**
4. **Power connector**
5. **VESA release button**
6. **HDMI port**
7. **Mini DisplayPort™**
8. **DisplayPort™**
9. **Audio-out jack**
10. **USB Type-C™ port (upstream)**
11. **USB Type-A ports (2) (downstream)**
12. **Security cable slot**
13. **USB Type-A port (downstream)**
14. **USB Type-C™ 3.1 port (downstream)**

NOTE: The USB Type-C™ upstream port can function as a DisplayPort audio/video input, as a USB 3.0 upstream connection, or it can be used to deliver up to 65 watts of power to a device. See Power Output section below for specifications.

Technical Specifications

Panel Specifications*	Display Size (Diagonal)	31.5-inch
	Display Panel Type	IPS
	Micro-Edge Bezel	Yes, 4 sided
	Native Resolution/Timing	3840 x 2160 @ 60 Hz
	Panel Bit Depth	10bit (8 + 2 FRC)
	Aspect Ratio	16:9
	Brightness - Typical	350 cd/m ²
	Static Contrast Ratio - Typical	1,300:1
	Dynamic Contrast Ratio -Typical	5,000,000:1
	NOTE: Dynamic Contrast Ratios during video playback only, depending on series of frames or time duration.	
	Pixel Pitch	0.18159(H)mm x 0.18159(V)mm
	Pixels Per Inch (PPI)	140
	Backlight Lamp Life (to half brightness - in hours)	30k hours minimum
	Anti-Glare Panel	Yes
	Response Time – Typical	14ms Gray to Gray
	NOTE: Product default is 14ms response time and can be adjusted to as low as 6ms in the display menu. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.	
	Horizontal Viewing Angle (typical CR>10)	178°
	Vertical Viewing Angle (typical CR>10)	178°
	Panel Active Area (w x h)	697.3056 x 392.2344 mm
	Preset Graphic Modes/Supported Resolutions	640×480 @60Hz
720×400 @70Hz		
800×600 @60Hz		
720×480 @60Hz		
1024×768 @60Hz		
1280×720 @60Hz		
1280×768 @60Hz		
1280×800 @60Hz		
1280×1024 @60Hz		
1440×900 @60Hz		
1600×900 @60Hz		
1600×1200 @60Hz		
1680×1050 @60Hz		
1920×1080 @60Hz		
1920×1200 @60Hz		
2560×1440 @60Hz		
2560×1600 @60Hz		
3840×2160 @30Hz		
3840×2160 @60Hz		
Maximum Resolution	3840 x 2160 @ 60 Hz	
Recommended Resolution	3840 x 2160 @ 60 Hz	
Vertical Scan Range	29-60 Hz	
Horizontal Scan Range	28-135 kHz	
Maximum Pixel Clock Speed	533.25 MHz	
*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.		
Color Gamut Coverage	sRGB	99% sRGB
	BT.709	100%
Color Management	Factory Color Calibrated	Yes
	Factory Color Presets	BT.709, sRGB

Technical Specifications

	Default Color Temperature	D65
	Low Blue Light Modes	Yes
	RGB Channel Adjust	Yes, Gain
Monitor Specifications	Exterior Color of Monitor Bezel & Stand	Black Pearl
	Plug & Play	Yes
	Tilt	Yes, -5° to +20°
	Swivel	Yes, 90°
	Height Adjustment Range	Yes, 120 mm
	VESA Mounting	Yes 100 mm with integrated mount
	Security Lock Ready	Yes
	Detachable Base	Yes, ships detached
	Warranty	3/3/0
	Zero Bright Dot Guarantee	Yes
On Screen Display (OSD)	On Screen Display User Controls	Brightness, Contrast, Color Control, Input Control, Image Control, PIP Control, Power Control, Menu Control, Management, Information, Exit
	Monitor Control Buttons or Switches	Menu, Viewing Modes, Information, Next Active Input, Power
	User-Assignable Function Buttons	Yes, 3
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
Connector Types	DisplayPort™	1 DisplayPort™ 1.2
	Mini- DisplayPort™	1 Mini DisplayPort™ 1.2
	HDMI	1 HDMI 2.0
	USB Type-C™	2, 1 upstream (rear) and 1 downstream (side)
	HDCP support	Yes, HDCP 1.4 for DisplayPort™ and HDCP 2.2 for HDMI
	Audio Output	1 Line out
USB Port Specifications	USB Version	3.0
	USB Hub	Yes
	Downstream Ports	3 USB-A downstream ports
	Fast Charging USB Ports	3 Ports
	Power Output Maximum	7.5W (BC1.2)
USB-Type C™ Port Specifications	USB-Type C™ Version	USB 3.1 Gen1 / 5 Gbps
	Downstream USB-Type C™ Ports	1 Port
	Upstream USB-Type C™ Ports	1 Port
	Video Support	Rear: USB-C™ Alt mode – DisplayPort™ 1.2 Rear: 5V/3A, 9V/3A, 10V/5A, 12V/5A 15V/4.33A, 20V/3.25A Side: 5V/1.5A; 5V/3A
	Power Output	Rear: 65W Max Side: 15W Max
	Power Output Maximum	
Power & Operating Specs	Power Supply	Internal
	Input Power	100 - 240 VAC 50/60 Hz
	Power Consumption – Maximum	185 W
	Energy Saving/Standby Mode	0.5 W
	Power Consumption – Typical	70 W
	Power cable length	1,9 m (6.2 ft)
Special Features	Picture-in-Picture, Picture-by-Picture	Yes, 2 PIP/PBP
	Remote Manageability	No

Technical Specifications

ENERGY STAR® Data	Operational Mode at 100 VAC	32.58 W
	Operational Mode at 115 VAC	32.65 W
	Operational Mode at 230 VAC	31.44 W
EU Energy Efficiency Class (EC1062)	On-mode Power Consumption (EC 1062/2010)	45W
	Annual Power Consumption (EC 1062/2010)	66 kWh
	Energy Efficiency Class (EC 1062/2010)	B
	Visible Screen Size	31,5"/80,0 cm Diagonal
Operating Conditions	Operating Temperature - Celsius	5° to 35° C
	Operating Temperature - Fahrenheit	41° to 95° F
	Non-operating Temperature - Celsius	-20° to 60° C
	Non-operating Temperature - Fahrenheit	-4° to 140°
	Operating Humidity	20% to 80% non-condensing
	Non-operating Humidity	5% to 95%
	Operating Altitude	0 to 5,000 m (16,404 ft)
	Non-operating Altitude	0 to 12,192 m (0 to 40,000 ft)
Environmental Features and Certifications	Mercury-free LED display backlighting	Yes, Mercury-free LED backlights
	Arsenic-Free Display Glass	Yes
	Low Halogen	Yes GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)
	NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.	
	Agency Approvals and Certifications	WW application CE,CB,KC/KCC/ICE/TUV-S/ISO 9241-307/ EAC/UL/PSB/ISC/CCC/CEL/CECP/SEPA/TCO/Energy Star/VCCI/FCC/BSMI/WEEE
	Microsoft WHQL Certification	Win 10, Win 8, Win 7
	ENERGY STAR® certified	Yes, ENERGY STAR® 7
	EPEAT® Registered	EPEAT® 2019 Registered
	NOTE: Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit http://www.epeat.net for more information.	
	China Energy Label	CEL Grade 1
TCO Certified	Yes	
SmartWay Transport Partnership - NA only	Yes (NA SKU)	
Contains Recycled Plastics	Contains Recycled Plastics in Back Cover	0.35
	Contains Recycled Plastics in Base/Stand	0.35
	Contains Recycled Plastics in Other Parts	17.5%
	Recyclable Plastics	Back cover, Middle cover, VESA cover, Hinge cover, Base top cover, Base bottom cover, Column back cover, Column front cover
	Recyclable Packaging (Box, packing materials)	Carton, Paper Board, Corner Paper

Technical Specifications

Unit Product/Package Specifications	Product Dimensions (Unpacked with stand)	
	Metric (W x D x H)	71.45 x 24.8 x 56.44 cm
	Imperial (W x D x H)	28.13 x 9.76 x 22.22 in
	Product Dimensions (Packed)	
	Metric (W x D x H)	83.3 x 32.5 x 51.5 cm
	Imperial (W x D x H)	32.8 x 12.8 x 20.3 in
	Display Head Dimensions (Unpacked without stand)	
	Metric (W x D x H)	71.45 x 4.45 x 41.09 cm
	Imperial (W x D x H)	29.16 x 1.752 x 16.18 in
	Base Area Footprint	
	Metric (W x D x H)	300 x 248 mm
	Imperial (W x D x H)	11.81 x 9.764 in
	Product Weight (Unpacked with stand)	
	Metric	12.16 kg
	Imperial	26.81 lb
Product Weight (Packed)		
Metric	15.28 kg	
Imperial	33.69 lb	
Product Weight (Head Only)		
Metric	7.59 kg	
Imperial	16.733 lb	
Pallet Information	Pallet Dimensions	
	Metric (L x W x H)	985 x 840 x 120 mm / 1310 x 840 x 120 mm
	Imperial (L x W x H)	38.8 x 33.1 x 4.7 in / 51.6 x 33.1 x 4.7 in
	Pallet Total Weight	
	Metric	198.9 kg / 263.5kg
	Imperial	438.1 lbs / 580.4 lbs
	Pallet Layers	4
	Pallet Product per Layer	3 / 4
	Total Products per Pallet	12 / 16
	Container Load, 20-Foot	196 units
Container Load, 40-Foot	392 units	
Container Load, 40-Foot HighQ	392 units	
Options¹	HP B500 PC Mounting Bracket	2DW52AA
	HP UHD USB Graphics Adapter	N2U81AA
	HP Business PC Security Lock v2 Kit	N3R93AA
Software Included	Software included	HP Display Assistant
	What's in the box?	AC power cord (1.9m) 6.2 ft USB C-to-A data cable (1.8m) USB-C-to-C cable (1.8m) DP Cable (1.8m)
Accessories Included		
	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

Technical Specifications

Other	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
Service and Warranty	Protected by HP, including a 3 year standard limited warranty. Optional HP Care Pack Services are extended service contracts that extend your protection beyond the standard warranties. ²	

Technical Specifications

Copyright © 2019 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.

1. Sold separately. See product QuickSpecs for exact device and display compatibility.
2. HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

Technical Specifications

Change Log	
V1 to V2 October 12, 2018	Added USB-C-to-C cable (1.8m)
V2 to V3 May 28, 2019	Updated EPEAT and panel specifications