


DS-2CD2E10F 1.3 MP Recessed Mount Dome



Key Features

- 1.3 Megapixel High Resolution
- Up to 1280 x 960 Resolution
- 30 fps Real-Time Video
- Efficient Encoding Capability
- On-Board Storage: Up to 128 GB
- 3D Digital Noise Reduction
- Digital WDR
- Dual Streams
- Backlight Compensation

Dimensions

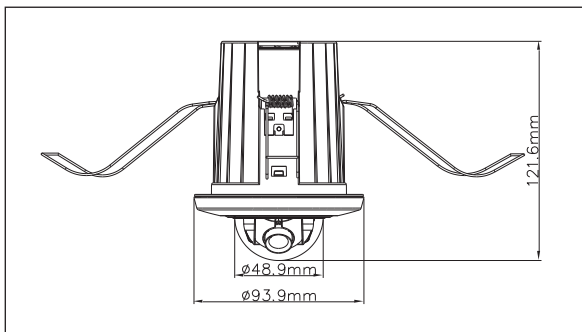

Order Model

DS-2CD2E10F

DS-2CD2E10F

DS-2CD2E10F	
Camera	
Image Sensor	1/3" progressive scan CMOS
Minimum Illumination	Color: 0.028 @ f/2.0; BW: 0 with IR
Shutter Speed	1/3 s to 1/100,000 s
Lens Type	4 mm fixed lens (2.8 mm/6 mm lens optional)
Angle of View	4 mm: 73.1°, 2.8 mm: 92.5°, 6 mm: 46°
Lens Mount	M12
Day/Night	Electronic
DNR	3D digital noise reduction
WDR	Digital WDR
Compression Standard	
Video Compression	H.264/MJPEG
H.264 Type	Baseline Profile/Main Profile
Video Bit Rate	32 Kbps to 8 Mbps
Dual Streams	Supported
Image	
Maximum Resolution	1280 x 960
Frame Rate	30 fps (1280 × 960, 1280 × 720)
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness adjustable by client software or Web browser
BLC	Supported, zone configurable
ROI Codec	Supported
D/N Switch	Auto/schedule/triggered by alarm in
Network	
Network Storage	NAS (supports NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	One-key reset, flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, anonymous access
Standards	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ-45 10M/100M Ethernet port
On-Board Storage	Built-in microSD/SDHC/SDXC slot; up to 128 GB
General	
Operating Conditions	-10° C to 40° C (-14° F to 104° F), humidity 95% or less (non-condensing)
Power Supply	12 VDC ±10%, PoE (802.3af)
Power Consumption	Maximum 4.2 W
Dimensions	Φ93.9 × 121.6
Weight	200 g

Accessories



Lens Cover
Gold



Lens Cover
Silver



Lens Cover
Black